

Dante 2-Channel Analog Audio Decoder

500552



Overview

The Dante 2-Channel Analog Audio Decoder (Model: 500552) is designed to receive digital audio signals from Dante-compliant equipment, then decode and output them as analog audio signals. The unit supports balanced or unbalanced audio output and 3 level gain adjustment. It can be powered using either PoE from any PoE network switch or via local with a 12v power supply.

Applications

- Conference Rooms
- Education
- Retail Stores
- Hotels
- Restaurants
- Conference Center
- Hospitals

Key Features

- Interface Dante audio equipment to analog audio equipment
- Supports balanced/unbalanced 2ch analogue audio output
- Audio sampling rate supports 44.1kHz, 48kHz and 96kHz (24bit)
- Audio output supports 3-level gain adjustment: +18dBu, 0dBu (default) and -10dBV
- Supports DC 12V power supply and PoE function (IEEE802.3af Class 0)
- Supports AES67 RTP audio transport

Specification

Technical

Video Network Bandwidth	100M
Audio Formats	PCM 2.0 44.1kHz/48kHz/96kHz up to 24bit
Transmission Distance	100m (CAT6/6A)
Control Method	Dante Controller

Connection


Inputs	1 x DANTE [RJ45 connector, PoE] 1 x PWR [2-pin phoenix, 3.81mm]
Output	1x AUD [6-pin phoenix, 3.81mm]

Mechanical

Housing	Metal Enclosure
Color	Black
Dimensions (WxDxH)	120mm[W] x 47mm[D] x 26mm[H]
Weight	186g
Power Supply	DC input: 12V PoE input: IEEE802.3af Class 0
Power Consumption	1.32W
Operation Temperature	32 - 104°F / 0 - 40°C
Storage temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (no condensation)

Warranty	2 years
Order Information	500552 Dante 2 Channel Analog Audio Decoder (UPC: 627699005521)

Diagram

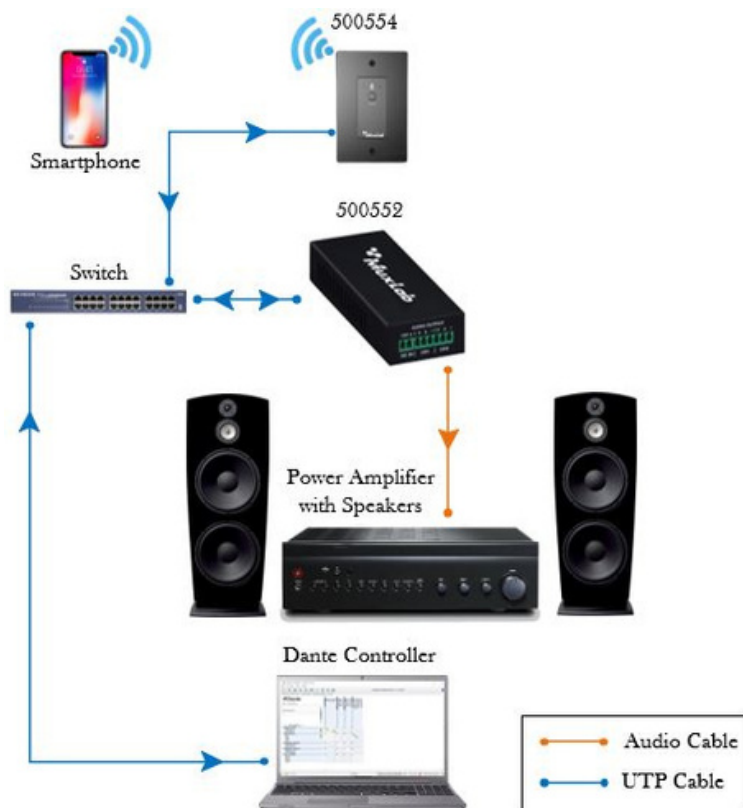

Dante 2-Channel Analog Audio Decoder
500552

Follow us:    

2321 Cohen | St-Laurent, H4R 2N7 | Québec, Canada Tel: 514-905-0588 | Fax:
514-905-0589 | Toll free: 1-877-689-5228 info@muxlab.com |
salesteam@muxlab.com | www.muxlab.com