

# Opto-Input Adapter /i

Photosensitive cell

Product code: CS0257




## Main features

- Compatible with Versatile, Universal and General I/O ports
- Cable length 2 m

## Description

Any status indicator on the controlled device can be read using the Opto-Input Adapter /i photosensitive cell. The Opto-Input Adapter /i is fastened on the indicator using double-sided adhesive tape. It is compatible with General I/O and Versatile port. Cable length 2 m

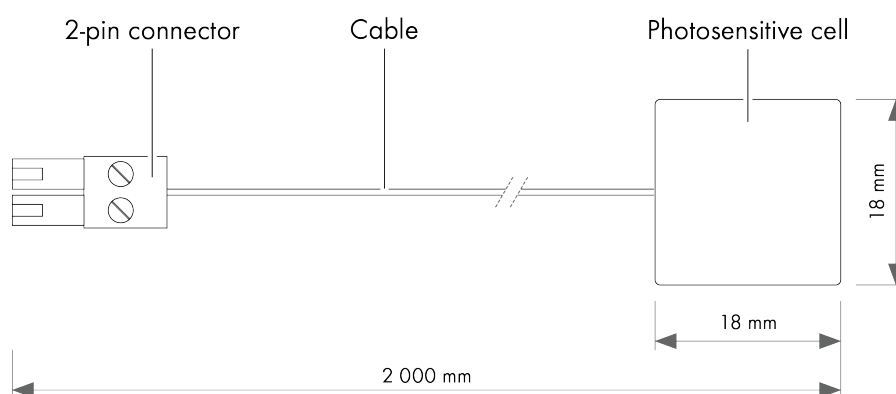

## Specifications

### Connection

- To controller General I/O or versatile port
- 2-pin 3.5 mm connector

### Physical

- Black plastic photosensitive cell enclosure 18 x 18 x 8 mm
- Cable length 2 m / 6.6 ft

### Environment conditions

- Operating temperature 10° to 40° C
- Storage temperature 0° to 60° C
- Relative humidity 10% to 90% non-condensing