


# SKSK215M-28

DATA SHEET

KSK Line

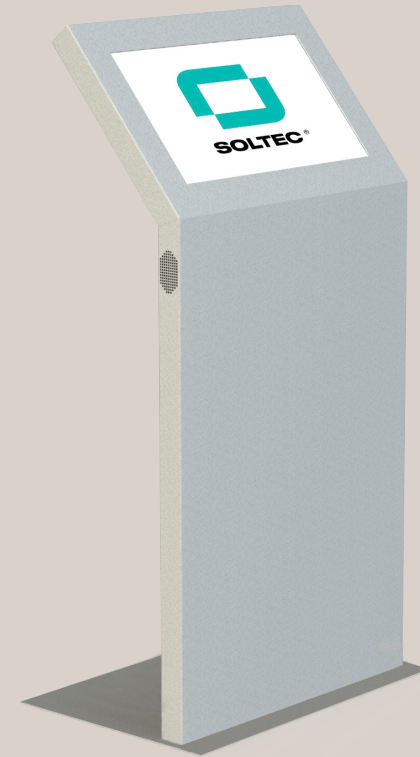

## **KSK Line · Interactive Multimedia Kiosk**

At a height of 1.2m and one of the thinnest designs on the market, this kiosk is the perfect solution for any interactive point instalation.



# SKSK215M-28

## SOLTEC TECHNICAL SPECIFICATIONS

### INTERACTIVE MULTIMEDIA KIOSK KSK Line

#### GENERAL DESCRIPTION

Interactive Multimedia Kiosks with a classic design.

At a height of 1.2m and one of the thinnest designs on the market, this kiosk is the perfect solution for any interactive point installation. Built-in projected capacitive touch screen and a PC that can be customized according to customers' technical requirements.

Touch Screen



Thermal printer



Keyboard



Speakers



Outdoor Housing



Magnetic band reader



Full range of options available.



#### DISPLAY

|                    |                       |
|--------------------|-----------------------|
| Panel Technology   | Edge LED Technology   |
| Display Area (mm)  | 476.64(H) x 268.11(V) |
| Size               | 21.5"                 |
| Pixel Pitch (mm)   | 0.248 x 0.248         |
| Screen Aspect      | 16:9                  |
| Native Resolution  | 1920 x 1080           |
| Viewing Angle UDLR | 89°/89°/89°/89°       |
| Contrast Ratio     | 5000:1 (Typ)          |
| Brightness cd/m2   | 300 (Typ)             |
| Colors             | 16.7M Colors          |
| Response Time      | 16ms Ton + Toff       |
| Life Time (hours)  | 50.000                |
| Touch Screen       | Capacitive Technology |

#### BUILT-IN PC

|                  |                           |
|------------------|---------------------------|
| CPU              | Intel QuadCore J3455      |
| Platform         | Mini-ITx                  |
| RAM Memory       | 4GB DDR3 SO-DIMM          |
| HDD              | 120GB SATA SSD            |
| Ethernet Chipset | Realtek RTL8111GR Gigabit |
| Graphics Chipset | Intel HD Graphics 500     |

#### ELECTRICAL

|                    |                    |
|--------------------|--------------------|
| Power Supply Input | 110/220VAC 50-60Hz |
| Power Consumption  | 90W                |
| Energy Management  | VESA DPMS          |

#### MECHANICAL (SKSK215M-28)

|                       |              |
|-----------------------|--------------|
| Net without base (mm) | 1200x550x50  |
| Net with base (mm)    | 1200x595x375 |
| Packing (WxHxD)       | 1280x650x530 |
| Net Weight (Kg)       | 60           |

#### ENVIRONMENTAL CONDITIONS

|                        |             |
|------------------------|-------------|
| Operation Temperature  | 0° to 60°   |
| Storage Temperature    | -20° to 60° |
| Operation Humidity (%) | 5 to 90     |
| Storage Humidity (%)   | 5 to 90     |

#### OTHERS

|                |                                 |
|----------------|---------------------------------|
| Certifications | CE; RoHS                        |
| Plug & Play    | VESA DDC2Bi                     |
| Accessories    | Mains Power Cord<br>User Manual |

#### OPTIONS

|                       |                                  |
|-----------------------|----------------------------------|
| Computer upgrade      | Intel i3, i5, i7<br>RAM 4GB DDR3 |
| Amplifier + Speakers  | 2W x 2W Speakers                 |
| Protective Glass      | 4mm tempered glass               |
| Keyboard+ Trackball   | Stainless steel IP65             |
| High Brightness Panel | 1.000cd/m²                       |
| Thermal Printer       | 60/80/120/A4                     |
| Bar Code Rader        | Lineal, PDF417, QR               |
| RFID Reader           | Manual / Motorized               |
| Customized housing    |                                  |
| Option 1              | Painted RAL Palette              |
| Option 2              | Stainless steel housing          |
| Option 3              | Outdoor IP65                     |

Specifications subject to change without prior notice

# SKSK215M-28

**SOLTEC**  
GENERAL DIMENSIONS

## INTERACTIVE MULTIMEDIA KIOSK

KSK Line

### CONSULTANTS & ARCHITECTS

Technical product description


1.2m high kiosk with a classic design ideal for all types of facilities where interactive points are required.

21.5" TFT screen in a landscape position and with a native resolution of Full HD (1.920 x 1.080).

It incorporates a "PCAP" projected capacitive touch screen.

Integrated PC with the possibility of custom configuration. The standard PC incorporates an Intel QuadCore J3455 CPU with 4GB RAM and 120GB SSD.

The structure is made of steel painted in a RAL color to be chosen by the customer for a better adaptation to the installation or the environment.

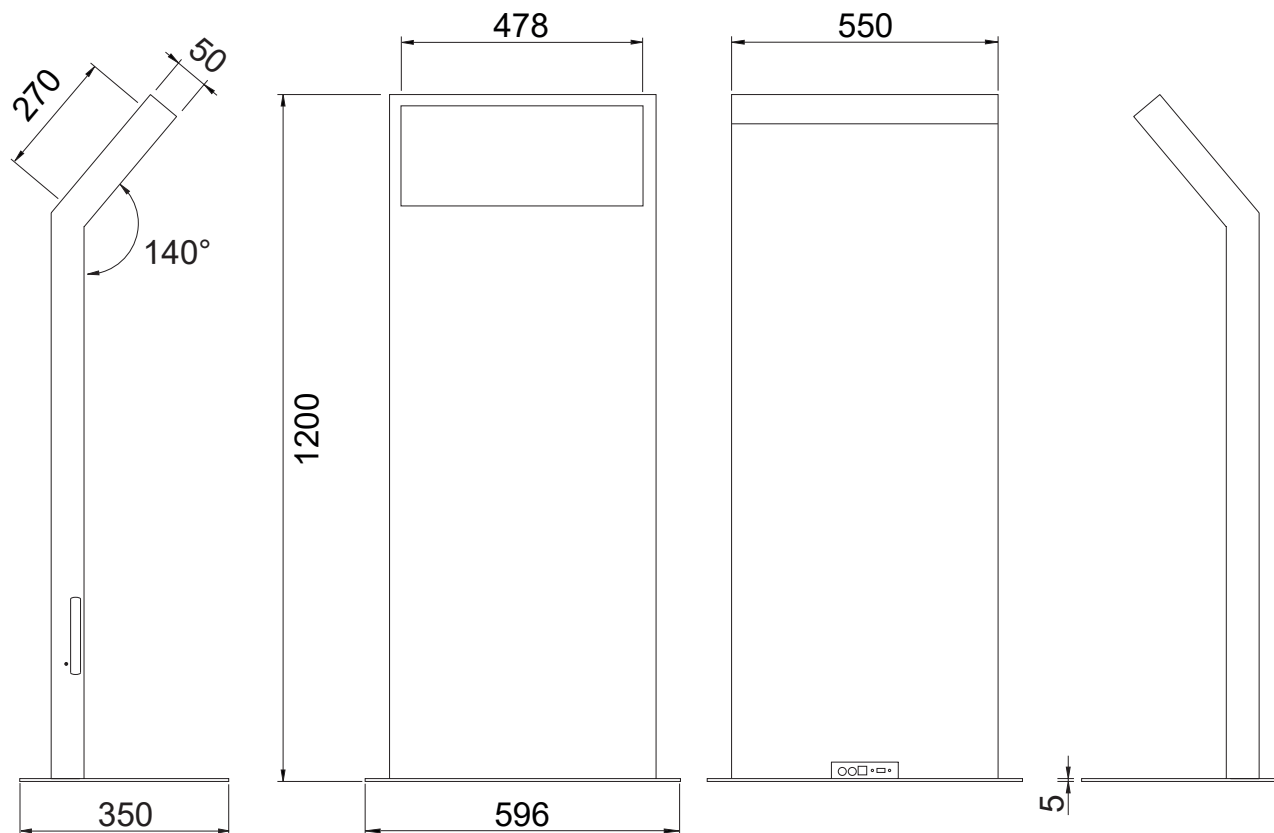

Standard illustrated model

