

SOPF270M-10

DATA SHEET

OPF M Line



OPF M Line • Open Frame Monitors

Designed with lateral front brackets on each side for easy integration.



SOPF270M-10

SOLTEC

TECHNICAL SPECIFICATIONS

OPEN FRAME MONITORS

OPF M Line

GENERAL DESCRIPTION

27" Open Frame Monitors.

Designed with lateral front brackets on each side for easy integration. All monitors are available as a basic monitor, with a built-in PC and with a built-in digital media player.

Full range of options available.



DISPLAY

Panel Technology	Edge LED Technology
Display Area (mm)	597.6 (H) x 336.15 (V)
Size	27"
Pixel Pitch (mm)	0.311 x 0.311
Screen Aspect	16:9
Native Resolution	1920 x 1080
Viewing Angle UDLR	89°/89°/89°/89°
Contrast Ratio	3000:1 (Typ)
Brightness cd/m2	350 (Typ)
Colors	16.7 M Colors
Response Time	12ms Ton + Toff
Life Time (hours)	50.000

CONNECTIVITY

Analogue RGB Input	1xDB15
Digital Input	1xDVI
Display Port	DP 1.1a
Plug & Play	VESA DDV2Bi
Auto Detection	Yes
No Signal Detected	Standby Mode
Identification	DDC2Bi EDiD v1.3

ELECTRICAL

Power Supply Input	110/220VAC 50-60Hz
LCD Consumption	30W
Energy Management	VESA DPMS

MECHANICAL (SOPF270M-10)

With lateral brackets	699x407x75
Without lateral brackets	660x407x75
Between holes	679x160 (2)
Packing (WxHxD)	770x510x220
Net Weight (Kg)	9

ENVIRONMENTAL CONDITIONS

Operation Temperature	0° to 50°
Storage Temperature	-20° to 60°
Operation Humidity (%)	10 to 90
Storage Humidity (%)	10 to 90

OTHERS

Certifications	CE; RoHS
Accessories	Mains Power Cord User Manual

ORDERING INFORMATION

SOPF270M-10	Standard 27" OPF-M Line
SOPF270M-18	27" OPF-M Line with built-in PC Intel J3455 Quadcore CPU RAM 4GB DDR3 Intel HD Graphics Chipset
SOPF270M-15	27" OPF-M Line with built-in DMP Digital Media Player

Specifications subject to change without prior notice

SOPF270M-10

SOLTEC
STANDARD AVAILABLE OPTIONS

OPEN FRAME MONITORS

OPF M Line

27" Open Frame TFT Monitor designed with lateral front brackets on each side for easy integration.

High Brightness



Built-in PC



Horizontal Orientation



Touch Screen




Protective glass



Vertical Orientation




CVBS



RS-232



RS-485



ORDERING INFORMATION OPTIONS

CVBS-IN

Composite Video Input RCA

CVBS-INOUT

Composite Video Input / Output BNC

I3 - CPU

Intel i3 CPU upgrade

I5 - CPU

Intel i5 CPU upgrade

I7 - CPU

Intel i7 CPU upgrade

8RAM

8GB RAM DDR3 upgrade

16RAM

16GB RAM DDR3 upgrade

32RAM

32GB RAM DDR3 upgrade

PCT270IN

27" Projected Capacitive Touch Screen

IR270-2

27" Infrared Technology

270HB

1500cd/m² High Brightness TFT option

RS323

RS-232 Serial Control DB9 Connector

RS485

RS-485 Serial Control RJ45 Connector in/out

DMP

Built-in Digital Media Player

G270L

27" 6mm Laminated Protective Glass

G270AGL

27" 6mm Anti-Glare Laminated Protective Glass

CUSTOMIZED COLOR

RAL Palette



Specifications subject to change without prior notice

SOPF270M-10

SOLTEC
GENERAL DIMENSIONS

OPEN FRAME MONITORS


OPF M Line

CONSULTANTS & ARCHITECTS

Technical product description

27" Open Frame TFT Monitor designed with painted steel housing with lateral front brackets on each side for an easy integration.

Native resolution Full HD 1920 x 1080. VGA, DVI-D and Display Port inputs optionally. It can be with a built-in Industrial Computer or a Digital Media Player

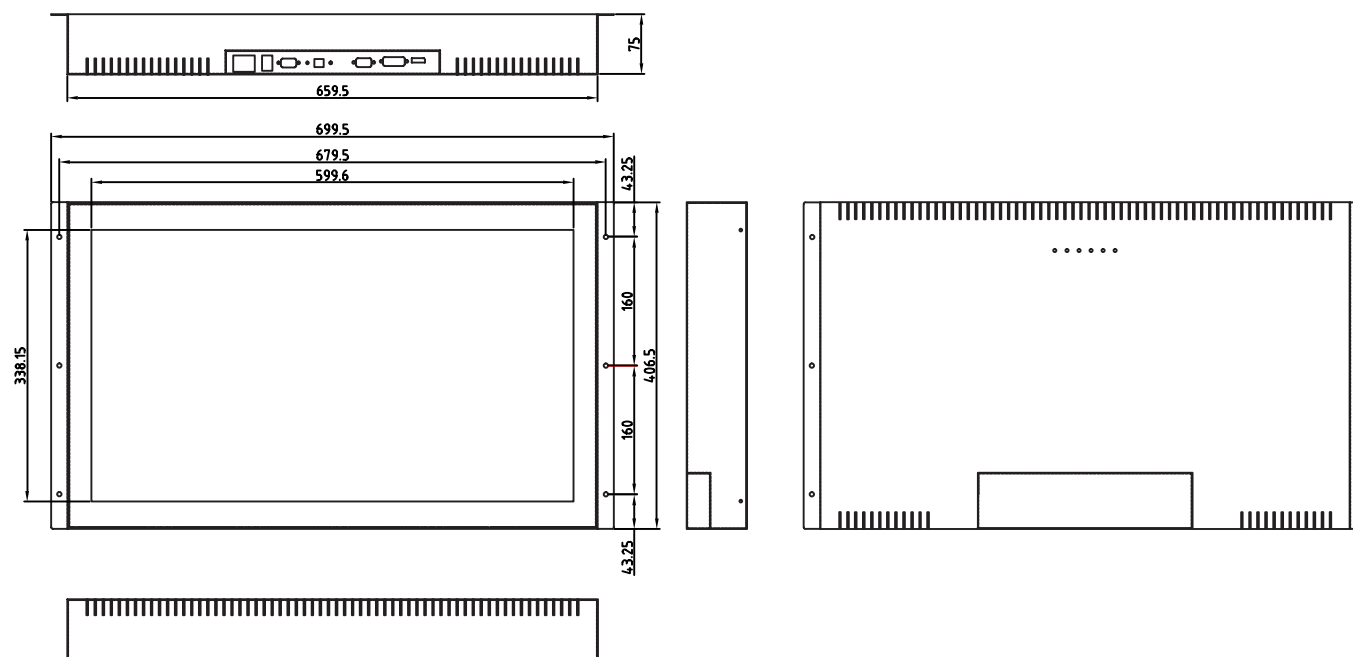

Illustrated standard model without built-in PC

