

# ***Indoor housings***

***for flat panels***

*The indoor housings are the perfect way to protect and brand your flat panel*



# Screens

## in public places



**Screens mounted in public places demand protective solutions.**

The Audipack lockable indoor housings offer heavy-duty protection for the flat panel, and a sleek, modern look that does not detract from the screen content.

**The indoor theft delay housing** is a security housing for digital signage projects. A fully removable front with hardened glass protects the monitor.

It is available in portrait or landscape models.


The stylish glass front is made from polished, coated and hardened glass and the housing also offers internal space for equipment such as players and switchers.

**Slim-line indoor theft delay housings** are also available for LCD and LED screens with a reduction in depth of 50% to complement thinner panels.

- ▲ Suitable for any brand and type of flat panel
- ▲ Very easy installation
- ▲ Easy equipment and flat panel access
- ▲ Available in Any RAL colour and finishing



(FSMT-70) The flat panel is very easy accessible



High level finishing



Easy access after unlocking the glass front



Optional available in any RAL colour

**Slim-line THEFT DELAY HOUSINGS**

For screens up to 75 mm. depth  
**IP 30**



Colour: **Black bezel, white housing, glass front**

	<b>Landscape</b>	<b>Portrait</b>		
<b>Ref.</b>	<b>FSMT-N32S</b>	<b>FSMT-N32SP</b>		Max. ° 32
Max. screen size	W 730 x D 75 x H 430	W 430 x D 75 x H 730		
<b>Ref.</b>	<b>FSMT-N40S</b>	<b>FSMT-N40SP</b>		Max. ° 40
Max. screen size	W 920 x D 75 x H 530	W 530 x D 75 x H 920		
<b>Ref.</b>	<b>FSMT-N42S</b>	<b>FSMT-N42SP</b>		Max. ° 42
Max. screen size	W 965 x D 75 x H 560	W 560 x D 75 x H 965		
<b>Ref.</b>	<b>FSMT-N46S</b>	<b>FSMT-N46SP</b>		Max. ° 46
Max. screen size	W 1050 x D 75 x H 605	W 605 x D 75 x H 1050		
<b>Ref.</b>	<b>FSMT-N47S</b>	<b>FSMT-N47SP</b>		Max. ° 47
Max. screen size	W 1075 x D 75 x H 620	W 620 x D 75 x H 1075		
<b>Ref.</b>	<b>FSMT-N49S</b>	<b>FSMT-N49SP</b>		Max. ° 49
Max. screen size	W 1130 x D 75 x H 640	W 640 x D 75 x H 1130		
<b>Ref.</b>	<b>FSMT-N50S</b>	<b>FSMT-N50SP</b>		Max. ° 50
Max. screen size	W 1140 x D 75 x H 655	W 655 x D 75 x H 1140		
<b>Ref.</b>	<b>FSMT-N55S</b>	<b>FSMT-N55SP</b>		Max. ° 55
Max. screen size	W 1250 x D 75 x H 715	W 715 x D 75 x H 1250		
<b>Ref.</b>	<b>FSMT-N60S</b>	<b>FSMT-N60SP</b>		Max. ° 60
Max. screen size	W 1365 x D 75 x H 785	W 785 x D 75 x H 1365		
<b>Ref.</b>	<b>FSMT-N65S</b>	<b>FSMT-N65SP</b>		Max. ° 65
Max. screen size	W 1460 x D 75 x H 835	W 835 x D 75 x H 1460		

**CLASSIC THEFT DELAY HOUSINGS**

For screens up to 150 mm. depth  
**IP 30**



Colour: **Black bezel, white housing, glass front**

	<b>Landscape</b>	<b>Portrait</b>		
<b>Ref.</b>	<b>FSMT-N32</b>	<b>FSMT-N32P</b>		Max. ° 32
Max. screen size	W 730 x D 150 x H 430	W 430 x D 150 x H 730		
<b>Ref.</b>	<b>FSMT-N40</b>	<b>FSMT-N40P</b>		Max. ° 40
Max. screen size	W 920 x D 150 x H 530	W 530 x D 150 x H 920		
<b>Ref.</b>	<b>FSMT-N42</b>	<b>FSMT-N42P</b>		Max. ° 42
Max. screen size	W 965 x D 150 x H 555	W 555 x D 150 x H 965		
<b>Ref.</b>	<b>FSMT-N46</b>	<b>FSMT-N46P</b>		Max. ° 46
Max. screen size	W 1050 x D 150 x H 605	W 605 x D 150 x H 1050		
<b>Ref.</b>	<b>FSMT-N47</b>	<b>FSMT-N47P</b>		Max. ° 47
Max. screen size	W 1075 x D 150 x H 620	W 620 x D 150 x H 1075		
<b>Ref.</b>	<b>FSMT-N49</b>	<b>FSMT-N49P</b>		Max. ° 49
Max. screen size	W 1130 x D 150 x H 640	W 640 x D 150 x H 1130		
<b>Ref.</b>	<b>FSMT-N50</b>	<b>FSMT-N50P</b>		Max. ° 50
Max. screen size	W 1140 x D 150 x H 645	W 645 x D 150 x H 1140		
<b>Ref.</b>	<b>FSMT-N55</b>	<b>FSMT-N55P</b>		Max. ° 55
Max. screen size	W 1250 x D 150 x H 715	W 715 x D 150 x H 1250		
<b>Ref.</b>	<b>FSMT-N60</b>	<b>FSMT-N60P</b>		Max. ° 60
Max. screen size	W 1365 x D 150 x H 785	W 785 x D 150 x H 1365		
<b>Ref.</b>	<b>FSMT-N65</b>	<b>FSMT-N65P</b>		Max. ° 65
Max. screen size	W 1460 x D 150 x H 835	W 835 x D 150 x H 1460		
<b>Ref.</b>	<b>FSMT-N70</b>	<b>FSMT-N70P</b>		Max. ° 70
Max. screen size	W 1575 x D 115/145 x H 905	W 905 x D 115/145 x H 1575		
<b>Ref.</b>	<b>FSMT-N72</b>	<b>FSMT-N72P</b>		Max. ° 72
Max. screen size	W 1625 x D 115/145 x H 930	W 930 x D 115/145 x H 1625		
<b>Ref.</b>	<b>FSMT-N75</b>	<b>FSMT-N75P</b>		Max. ° 75
Max. screen size	W 1680 x D 115/145 x H 940	W 940 x D 115/145 x H 1680		
<b>Ref.</b>	<b>FSMT-N80</b>	<b>FSMT-N80P</b>		Max. ° 80
Max. screen size	W 1805 x D 115/145 x H 1030	W 1030 x D 115/145 x H 1805		


## INDOOR HOUSINGS

# Screens in shops

FSMI housings with open front are suitable for installing screens in shop window environments. The open front structure allows to extract the heat radiation from the screen without using forced ventilation.

FSMI housing can be installed to 700 and 900 series floorstands and to the ceiling to floor CTF systems.

In combination with the ACG air curtain, the heat radiation of the shop window can be cooled down.

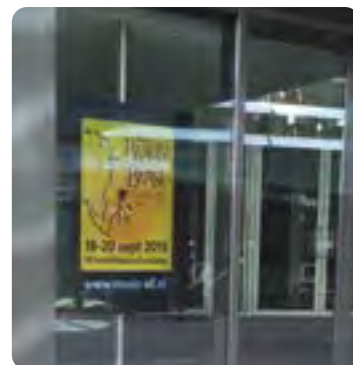

## Slim-line **INDOOR HOUSINGS OPEN**

**For screens up to 75 mm. depth**  
**Ideal for retail areas**



Colour: **Black bezel, white housing,**  
**open front bezel, no glass**

**When screens are used with high**  
**energy consumption (>300 watt)**  
**please contact Audipack sales.**

	<b>Landscape</b>	<b>Portrait</b>	
<b>Ref.</b>	<b>FSMI-N32S</b>	<b>FSMI-N32SP</b>	
Max. screen size	W 800 x D 75 x H 500	W 500 x D 75 x H 800	Max. ° 32
<b>Ref.</b>	<b>FSMI-N40S</b>	<b>FSMI-N40SP</b>	
Max. screen size	W 990 x D 75 x H 600	W 600 x D 75 x H 990	Max. ° 40
<b>Ref.</b>	<b>FSMI-N42S</b>	<b>FSMI-N42SP</b>	
Max. screen size	W 1035 x D 75 x H 630	W 630 x D 75 x H 1035	Max. ° 42
<b>Ref.</b>	<b>FSMI-N46S</b>	<b>FSMI-N46SP</b>	
Max. screen size	W 1120 x D 75 x H 675	W 675 x D 75 x H 1120	Max. ° 46
<b>Ref.</b>	<b>FSMI-N47S</b>	<b>FSMI-N47SP</b>	
Max. screen size	W 1145 x D 75 x H 690	W 690 x D 75 x H 1145	Max. ° 47
<b>Ref.</b>	<b>FSMI-N49S</b>	<b>FSMI-N49SP</b>	
Max. screen size	W 1175 x D 75 x H 705	W 705 x D 75 x H 1175	Max. ° 49
<b>Ref.</b>	<b>FSMI-N50S</b>	<b>FSMI-N50SP</b>	
Max. screen size	W 1205 x D 75 x H 725	W 725 x D 75 x H 1210	Max. ° 50
<b>Ref.</b>	<b>FSMI-N55S</b>	<b>FSMI-N55SP</b>	
Max. screen size	W 1320 x D 75 x H 785	W 785 x D 75 x H 1320	Max. ° 55
<b>Ref.</b>	<b>FSMI-N60S</b>	<b>FSMI-N60SP</b>	
Max. screen size	W 1435 x D 75 x H 855	W 855 x D 75 x H 1435	Max. ° 60
<b>Ref.</b>	<b>FSMI-N65S</b>	<b>FSMI-N65SP</b>	
Max. screen size	W 1460 x D 75 x H 910	W 910 x D 75 x H 1460	Max. ° 65

# ACCESSORIES

## UNIFLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock  
**Ref.: 230052**



<b>Ref.</b> Dimensions in mm Max. mounting range in mm Min. mounting range in mm	<b>UFPRO-V400</b> W 430 x D 6 x H 430 W 400 x H 400 W 100 x 100	<b>UFPRO-0500</b> W 516 x D 32 x H 382 W 470 x H 360 W 125	<b>UFPRO-0700</b> W 716 x D 32 x H 502 W 670 x H 446 W 125	<b>UFPRO-0800</b> W 860 x D 32 x H 502 W 810 x H 446 W 130	<b>UFPRO-0801</b> W 860 x D 39 x H 727 W 810 x H 671 W 120
---	--	---	---	---	---

## CEILING MOUNTS



Custom ceiling mount length available on request

<b>Ref.</b> Tube length	<b>FSM-CM600</b> 600 mm	<b>FSM-CM1000</b> 1000 mm
----------------------------	----------------------------	------------------------------

## SCREEN-CRAWLER (INSTALLATION AID)



<b>Ref.</b>	<b>SC-190</b>
Max load	200 kg
Height (retracted)	1990 mm
Max. lift height (hook)	2900 mm
Optional: <b>P7551</b> , lifting aid with eyebolts for lifting loads with bands or chains (bands and chains not supplied) more info on our website.	
▲ <b>Complies with NEN-EN-ISO 12100:2010NL</b>	
▲ <b>Yearly check-up required</b>	



The screen-crawler makes it possible to safely lift large screens with a minimum of effort and less installers. You simply attach the screen with hoisting cables/bands to the hoist aid and you hoist up te screen with the hinch.

## MOUNTING BRACKETS FOR FLAT PANELS

# Professional rental & interchangeable brackets

Special for flat panels that are installed temporarily to products of interchangeable with other screens are often equipped flat panel brackets with L&S5® mounting interface.

The L&S5 interface makes cross-rental and switches screens safe, quick and easy.

The brackets are extra sturdy and suitable for installing in landscape or portrait mode. Build for long lasting rental applications.

## UNIPLATFIX PRO (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock  
Ref.: **230052** (numeric) **230045** (key)

**Ref.**  
Dimensions in mm  
Max. mounting range in mm  
Min. mounting range in mm

**UFPRO-0500**  
W 516 x D 32 x H 382  
W 470 x H 360  
W 125

**UFPRO-0700**  
W 716 x D 32 x H 502  
W 670 x H 446  
W 125

**UFPRO-0800**  
W 860 x D 32 x H 502  
W 810 x H 446  
W 130

**UFPRO-0801**  
W 860 x D 39 x H 727  
W 810 x H 671  
W 120

**UFPRO-0900**  
W 960 x D 39 x H 727  
W 900 x H 671  
W 120



## ULTRA SLIM LED MOUNT MULTI-VESA

An Ultra slim LED mount with a multi VESA mounting pattern.  
Special made for the ultra thin LED screens.



**Ref.**  
VESA width  
VESA height

**UFPRO-V400**  
100, 200, 300 & 400  
100, 200, 300 & 400

**UFPRO-V600**  
100, 200, 300 & 400  
100, 200, 300 & 400

**390814**  
75, 100 & 200  
75, 100 & 200

## VESA FLAT PANEL BRACKETS

Available in different VESA sizes to match any flat panel with VESA 75, 100, 200, 400 and 600 mounting pattern.



**Ref.**  
VESA width  
VESA height  
Screw diameter

**390831**  
600  
200  
M6

**392565**  
300  
200  
M6

**392579**  
300  
300  
M6

**390845**  
400  
400  
M6, M8

**392541**  
600  
400  
M6

**390689**  
800  
400  
M6

**392561**  
800  
400  
M8

## L&S 5 MOUNT



**Ref. 390967**  
Dimensions in mm W 340 x D 18 x H 286  
Mounting interface L&S 5

## TILTABLE L&S 5 MOUNT



**Ref. 390657**  
Dimensions in mm W 359 x D 41 x H 320  
Mounting interface L&S 5  
Tilt adjustment -10° / 0° / +10°  
Optional lock numeric:230052

# Outdoor housings

*for flat panels*

## **The Audipack outdoor housings**

*The Audipack outdoor solutions finish and protects flat panels in outdoor applications*



 **Audipack**<sup>®</sup>

*It's great to have solutions...*

# Flat panels in open areas, and public places



Flat panels are being used more often for media systems in public spaces and outside areas, and need to be protected against the climate and vandalism. Each outdoor housing is custom -made for the specific flat screen and environmental circumstances

Audipack's flat panel housings enclose the panel in a sturdy, durable and easy to mount metal housing with a safety glass front.

The front of the housing is locked, opened with a unique key for maintenance and installation. Available with standard or custom built mounting accessories.

**The standard outdoor housings** are equipped with:

- ▲ thermostatically controlled ventilation and heating system
- ▲ safety glass
- ▲ replaceable filters

The standard active ventilation and heating system reduces condensation inside the housing, with Ip rating IP55.


**The high brightness outdoor housings** have IP rating IP65 and are equipped with:

- ▲ thermostatically controlled ventilation and heating system
- ▲ safety glass
- ▲ airconditioning (needed for high brightness screens)

- ▲ **Suitable for any brand and type of flat panel**
- ▲ **Very easy installation**
- ▲ **Easy equipment and flat panel access**
- ▲ **Available in Any RAL colour and finishing**
- ▲ **Landscape and portrait models available**



(FSMO-70) The flat panel is very easy accessible



High level finishing



Easy access after unlocking the glass front



Standard in RAL 9016  
Optional available in any RAL colour



**OUTDOOR HOUSINGS**

Max. surrounding temp. **-20°C to +30°C\***



**IP 55**



Power supply:  
230 VAC 50-60 Hz

**When screens are used with high energy consumption (>300 watt) in full sunlight please contact Audipack sales.**

	<b>Landscape</b>	<b>Portrait</b>	
<b>Ref.</b>	<b>FSMO-N32</b>	<b>FSMO-N32P</b>	Max. ° 32
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W730 x D110 x H430	W430x D150 x H730	
<b>Ref.</b>	<b>FSMO-N40</b>	<b>FSMO-N40P</b>	Max. ° 40
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W850 x D150 x H460	W460 x D150 x H850	
<b>Ref.</b>	<b>FSMO-N42</b>	<b>FSMO-N42P</b>	Max. ° 42
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W965 x D150 x H560	W560 x D150 x H965	
<b>Ref.</b>	<b>FSMO-N46</b>	<b>FSMO-N46P</b>	Max. ° 46
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1050 x D150 x H605	W605 x D150 x H1050	
<b>Ref.</b>	<b>FSMO-N47</b>	<b>FSMO-N47P</b>	Max. ° 47
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1075 x D150 x H620	W620 x D150 x H1075	
<b>Ref.</b>	<b>FSMO-N49</b>	<b>FSMO-N49P</b>	Max. ° 49
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1105 x D150 x H635	W635 x D150 x H1105	
<b>Ref.</b>	<b>FSMO-N50</b>	<b>FSMO-N50P</b>	Max. ° 50
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1135 x D150 x H655	W655 x D150 x H1135	
<b>Ref.</b>	<b>FSMO-N55</b>	<b>FSMO-N55P</b>	Max. ° 55
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1250 x D150 x H715	W715 x D150 x H1250	
<b>Ref.</b>	<b>FSMO-N60</b>	<b>FSMO-N60P</b>	Max. ° 60
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1365 x D150 x H785	W785 x D150 x H1365	
<b>Ref.</b>	<b>FSMO-N65</b>	<b>FSMO-N65P</b>	Max. ° 65
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1460 x D150 x H840	W840 x D150 x H1460	
<b>Ref.</b>	<b>FSMO-N70</b>	<b>FSMO-N70P</b>	Max. ° 70
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	Vesa 400 & L&S 5	Vesa 400 & L&S 5	
Max. screen size	W1575 x D115/145 x H905	W905 x D115/145 x H1575	
<b>Ref.</b>	<b>FSMO-N72</b>	<b>FSMO-N72P</b>	Max. ° 72
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1625 x D115/145 x H930	W930 x D 15/145 x H1625	
<b>Ref.</b>	<b>FSMO-N75</b>	<b>FSMO-N75P</b>	Max. ° 75
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1680 x D115/145 x H960	W960 x D115/145 x H1680	
<b>Ref.</b>	<b>FSMO-N80</b>	<b>FSMO-N80P</b>	Max. ° 80
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1805 x D115/145 x H1030	W1030 x D115/145 x H1805	
<b>Ref.</b>	<b>FSMO-N85</b>	<b>FSMO-N85P</b>	Max. ° 85
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W1915 x D115/145 x H1090	W1090 x D115/145 x H1915	

\*The housing is intended to use the surrounding air for ventilation; the surrounding air may not exceed the allowed working temperature of the flat panel.

## OUTDOOR HOUSINGS

## Slim-line OUTDOOR HOUSINGS

For screens up to 75 mm. depth

Max. surrounding temp. **-20°C to +30°C\***

**Not suitable for full sunlight environments.**



**IP 55**



Power supply:  
230 VAC 50-60 Hz

**When screens are used with high energy consumption (>300 watt) in full sunlight please contact Audipack sales.**

	Landscape	Portrait	
<b>Ref.</b>	<b>FSMO-N32S</b>	<b>FSMO-N32SP</b>	Max. " 32
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 730 x D 75 x H 430	W 430 x D 75 x H 730	
<b>Ref.</b>	<b>FSMO-N40S</b>	<b>FSMO-N40SP</b>	Max. " 40
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 920 x D 75 x H 530	W 530 x D 75 x H 920	
<b>Ref.</b>	<b>FSMO-N42S</b>	<b>FSMO-N42SP</b>	Max. " 42
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 965 x D 75 x H 560	W 560 x D 75 x H 965	
<b>Ref.</b>	<b>FSMO-N46S</b>	<b>FSMO-N46SP</b>	Max. " 46
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1050 x D 75 x H 605	W 605 x D 75 x H 1050	
<b>Ref.</b>	<b>FSMO-N47S</b>	<b>FSMO-N47SP</b>	Max. " 47
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1075 x D 75 x H 620	W 620 x D 75 x H 1075	
<b>Ref.</b>	<b>FSMO-N49S</b>	<b>FSMO-N49SP</b>	Max. " 49
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1130 x D 75 x H 640	W 640 x D 75 x H 1130	
<b>Ref.</b>	<b>FSMO-N50S</b>	<b>FSMO-N50SP</b>	Max. " 50
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1140 x D 75 x H 655	W 655 x D 75 x H 1140	
<b>Ref.</b>	<b>FSMO-N55S</b>	<b>FSMO-N55SP</b>	Max. " 55
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1250 x D 75 x H 715	W 715 x D 75 x H 1250	
<b>Ref.</b>	<b>FSMO-N60S</b>	<b>FSMO-N60SP</b>	Max. " 60
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1365 x D 75 x H 785	W 785 x D 75 x H 1365	
<b>Ref.</b>	<b>FSMO-N65S</b>	<b>FSMO-N65SP</b>	Max. " 65
Colour	Black bezel, white housing	Black bezel, white housing	
Mounting interface	L&S 5	L&S 5	
Max. screen size	W 1460 x D 75 x H 840	W 840 x D 75 x H 1460	



**OUTDOOR HOUSINGS HIGH BRIGHTNESS SCREENS**

LANDSCAPE

PORTRAIT

For screens up to 75 mm. depth  
**IP 55**

Max. surrounding temp. **-20°C to +30°C**



**Suitable for full sunlight**  
**Standard equipped with**  
**thermostatically controlled heating**  
**and ventilation.**



\* Audipack advises to use screens with an output of 800+ nits with IPS technology for outdoor and bright ambient light applications.

For these models refer to price list or website for brand related active ventilated monitor brackets

\* Always check the maximum allowed temperature of the screen.

**CUSTOM-MADE  
TO FIT ANY BRAND**

Power supply:  
230 VAC 50-60 Hz

Ref.	FSMO-N46HBV	FSMO-N46HBVP	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	46
Max. screen dimensions approx.	W 1050 x D 150 x H 605	W 605 x D 150 x H 1050	
Ref.	FSMO-N47HBV*	FSMO-N47HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	47
Max. screen dimensions approx.	W 1050 x D 150 x H 605	W 605 x D 150 x H 1050	
Ref.	FSMO-N49HBV*	FSMO-N49HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	49
Max. screen dimensions approx.	W 1130 x D 150 x H 640	W 640 x D 150 x H 1130	
Ref.	FSMO-N55HBV*	FSMO-N55HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	55
Max. screen dimensions approx.	W 1230 x D 150 x H 620	W 620 x D 150 x H 1230	
Ref.	FSMO-N60HBV*	FSMO-N60HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	60
Max. screen dimensions approx.	W 1365 x D 150 x H 785	W 785 x D 150 x H 1365	
Ref.	FSMO-N65HBV*	FSMO-N65HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	65
Max. screen dimensions approx.	W 1460 x D 150 x H 835	W 835 x D 150 x H 1460	
Ref.	FSMO-N72HBV*	FSMO-N72HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	72
Max. screen dimensions approx.	W 1600 x D 135 x H 900	W 900 x D 135 x H 1600	
Ref.	FSMO-N75HBV*	FSMO-N75HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	75
Max. screen dimensions approx.	W 1625 x D 147 x H 903	W 903 x D 150 x H 1625	
Ref.	FSMO-75HBP*		Max. °
Colour	Black bezel, white housing		75
Max. screen dimensions approx.	W XXX x D XXX x H XXX		
Cooling method	AC cooled		
Ref.	FSMO-N85HBV*	FSMO-N85HBVP*	Max. °
Colour	Black bezel, white housing	Black bezel, white housing	85
Max. screen dimensions approx.	W 1915 x D 147 x H 1090	W 1090 x D 147 x H 1915	



OUTDOOR HOUSINGS

**ACCESSORIES**

**UNIPLATFIX PRO** (UNIVERSAL FLAT PANEL BRACKETS)



Lock the bracket with the optional lock  
**Ref.: 230052**



**Ref.**  
 Dimensions in mm  
 Max. mounting range in mm  
 Min. mounting range in mm

**UFPRO-V400**  
 W 430 x D 6 x H 430  
 W 400 x H 400  
 W 100 x 100

**UFPRO-0500**  
 W 516 x D 32 x H 382  
 W 470 x H 360  
 W 125

**UFPRO-0700**  
 W 716 x D 32 x H 502  
 W 670 x H 446  
 W 125

**UFPRO-0800**  
 W 860 x D 32 x H 502  
 W 810 x H 446  
 W 130

**UFPRO-0801**  
 W 860 x D 39 x H 727  
 W 810 x H 671  
 W 120

**CEILING MOUNTS**



Custom ceiling mount length available on request

**Ref.**  
 Tube length

**FSM-CM-600**  
 600 mm

**FSM-CM-1000**  
 1000 mm

**SCREEN-CRAWLER (INSTALLATION AID)**



**Ref. SC-190**

Max load 200 kg  
 Height (retracted) 1990 mm  
 Max. lift height (hook) 2900 mm

Optional: **P7551**, lifting aid with eyebolts for lifting loads with bands or chains (bands and chains not supplied) more info on our website.

- ▲ **Complies with NEN-EN-ISO 12100:2010NL**
- ▲ **Yearly check-up required**



The screen-crawler makes it possible to safely lift large screens with a minimum of effort and less installers. You simply attach the screen with hoisting cables/bands to the hoist aid and you hoist up te screen with the hinch.