




Projectors... and More!

EK-600LU

6,000 center lumens bright with 80% uniformity and a 5,000,000:1 contrast ratio.
 Native WUXGA resolution. Compatible with inputs up-to UXGA, WUXGA and 4K.
 Supports analog and digital video input in all color standards up-to 1080p.
 Supports 4K video input via HDMI.
 Convenient mid-range (1.6:1) manual zoom and focus lens.
 Horizontal, Vertical & Corner Keystone Correction.
 Pincushion/Barrel & 6 point Geometric Correction.
 Vertical Manual Lens Shift. Wired network control.
 Displays 4:3, 16:9 and 16:10 aspect ratios. Supports most HDTV resolutions.
 Built-in 16 Watt sound system. Closed Caption decoding (NTSC).
 Side-accessed air filter for ease of maintenance.
 Auto input selection. Built-in Test Patterns.
 Security bar. Kensington® MicroSaver® security slot. PIN lock.
 3 year Projector warranty. 20,000 hour Laser Light Engine warranty.

EK-600LU

6,000 Lumens / WUXGA / 3LCD
 Long Life Laser Light Source
 Accepts inputs up-to 4K
 Crestron RoomView™ & AMX Device Discovery Technology

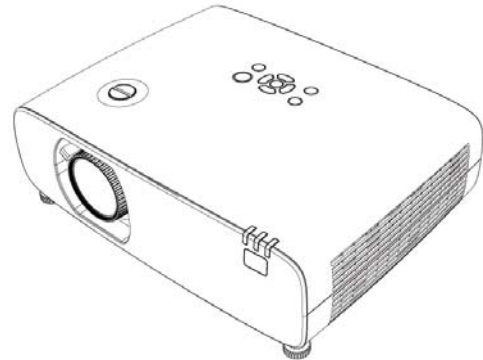

Included Accessories:

Quick Start Guide, 5.0 ft (1.5 m) VGA Cable, 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with 2x AAA Batteries)

Optional Accessories:

Replacement Filter, Ceiling Mount, Ceiling Post and Plate

Specifications: Model EK-600LU

Brightness	6,000 Center Lumens	Image Signal Resizing	Smart Scaling Technology
Contrast Ratio	5,000,000:1	Image Signal Inputs	
Illumination Uniformity	80%	Computer 1	Dsub15 x 1
Resolution and Aspect Ratio	WUXGA (1920x1200), 16:10	Digital Video (w/ HDCP)	HDMI x 2
Color Reproduction	10-bit (1.07 billion colors)	HDBaseT	RJ45 x 1
Projection Light Source	Laser	USB-A - Memory Viewer	USB Type A x 1
Estimated Light Source Life	20,000 hours	USB-B - USB Display / Firmware	USB Type B x 1
Total Pixels	6,912,000 (1920x1200) x 3	Composite Video	RCA x 1
Imaging System	0.64 in (16 mm) inorganic LCD Panels x 3	Audio Signal Inputs	
Scanning Frequency	Auto: H Sync. 15-100 KHz, V Sync. 24-85 Hz	Computer Audio	MiniStereo x 1
Pixel Clock	up-to 300 MHz	Video Audio	RCA x 2 (L/R)
Lens	Attached - Manual Zoom and Focus	Outputs	
Lens Specs	f: 1.5-2.08; FL: 0.677-1.09 in (17.2-27.7 mm)	Computer Monitor	Dsub15 x 1
Lens Ratios	Zoom Max:Min: 1.6:1; Throw:Width 1.25-2.00:1	Audio Output	Variable, Stereo: MiniStereo x 1
Image Diagonal	30-300 in (76.2-762 cm)	Speaker	Mono: 16 Watt
Image Width	2.1-21.2 ft (0.64-6.4 m)	Fan Noise (Eco / Normal)	28 dB / 37 dB
Throw Distance	2.5-42.00 ft (0.77-12.8 m)	Cabinet Size (HxWxD) - excluding legs	5.0 x 15.4 x 11.6 in (12.8 x 39.0 x 29.4 cm)
Lens Shift	V: + 60%	Weight	11.5 lb (5.2 kg)
Projector Elevation Adjustment (legs)	Up-to 3.5°	Packaged Cabinet Size (HxWxD)	9.4 x 6.1 x 17.4 in (23.9 x 49.2 x 44.3 cm)
Maximum Pitch	Up-to 360° Installation	Packaged Weight	14.8 lb (6.7 kg)
Vert/Horiz. Keystone Correction	Digital: V: +/- 30° H: +/- 30°, Corner Keystone	Operating Temperature	41-104°F (5-40°C)
Image Orientation	Normal, Reversed, Inverted	Electrical Safety Compliance	IEC / UL / cUL
Local Control / Power Management	Full Function / Auto Shutdown	Electromagnetic Compatibility	FCC Class B, CE Mark
Remote Control	Wireless x 1	Power Requirements	100-240V AC, 50/60 Hz
RS-232 Control	Dsub9 x 1	Power Consumption	0.5 W in Eco Standby mode, up-to 280W
LAN Port	RJ45 x 1	Heat	955 BTU
Computer Input in Pixels	up-to 1600x1200 (4:3), 3840x2160 (16:9)	Security Facilities	Kensington® Security Slot
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA	User Maintenance	Clean Filter
Analog Wide Inputs	WUXGA, WSXGA+, WXGA	Limited Warranty: to the original end use customer only	
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA	Projector	*3 years / 6,000 hours
Digital Wide Inputs	4K, WUXGA, WSXGA+, WXGA	Laser Light Engine only	20,000 hours use
Video Formats	NTSC / PAL / SECAM		*(whichever occurs first)
Video Input Analog	480i/p, 576i/p		
Video Input Digital	480p, 576p, 720p, 1080i/p		

EIKI® is a registered trademark of Eiki International Inc. Kensington is a registered trademark of ACCO Brands Corporation.

Specifications subject to change without notice. © Eiki International Inc. Issued January 6, 2023
Eiki International Inc., 22552 Avenida Empresa, Rancho Santa Margarita, CA 92688 Tel: 800-242-3454 Email: usa@eiki.com