

TECHNICAL DATA

Product type Jack

Product NO. M2TP3C

Product Appearance



Product features

- All Metal Shell - Strong and Reliable
- Excellent cable protection with splint and rubber seal sleeve
- Slim Design - Save Space

Technical parameter

1. Electrical parameters

Rated current	depends on mating connector
Rated voltage	< 50V
Contact resistance	≤ 5m Ω
Dielectric strength	1000V DC
Insulation resistance	> 2G Ω

2. Mechanical parameters

Signal line	24AWG
Power lin	0.2mm ²
Cable	2.0-4.5mm ²


3. Material and environmental parameters

Shell	Zinc diecast
drive pipe	Brass
Contacts	Brass
Contact surface	Ni
Inner core	Polyamide
Shell Electroplating	Cr
Temperature range	-20°C to +65°C

4. Standard

Electroplating Standard	IEC 68-2-20
-------------------------	-------------

Product Profile

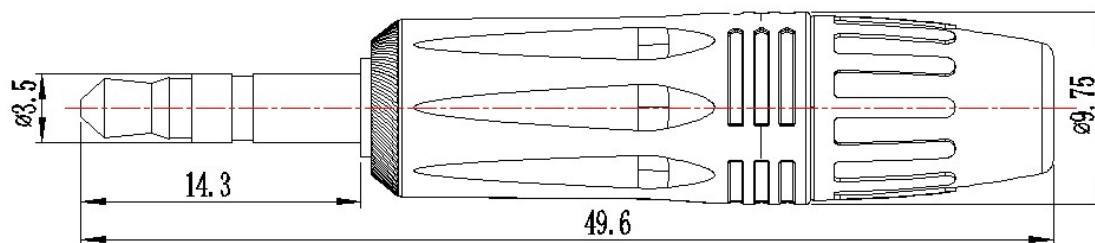

mm

Installation instructions

