

TECHNICAL DATA

Product type JACK

Product NO. M2TP3CB

Product Appearance



Product features

- All Metal Shell - Strong and Reliable
- Excellent cable protection with splint and rubber seal sleeve
- Slim Design - Save Space

Technical parameters**1. Electrical parameters**

Rated current	depends on mating connector
Rated voltage	<50V
Contact resistance	≤5m Ω
Dielectric strength	1000V DC
Insulation resistance	>2G Ω

2. Mechanical parameters

Signal line	24AWG
Power lin	0.2mm ²
Cable	2.0-4.5mm

3. Material and environmental parameters


Shell	Zinc diecast
drivepipe	Brass + PU
Contacts	Brass
Contact surface	Ni
Inner core	Polyamide
Shell Electroplating	Black coating
Temperature range	-20°C to +65°C

4. Standard

Electroplating Standard

IEC 68-2-20

Product Profile

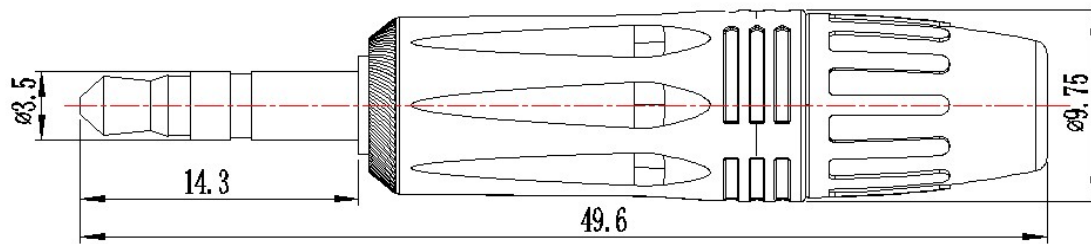

mm

Installation instructions

