

TECHNICAL DATA

Product type Plug

Product NO. MP2X

一、MP2X Product Appearance



Product features

- ✓ Particularly slender 1/4" plugs provide the highest density of packaging
- ✓ Strong die-cast housing with novel design
- ✓ Chuck jacket provides reliable cable maintenance
- ✓ Polishing design provides maximum operational convenience

Technical parameters

1. Electrical parameters

Rated current	depends on mating connector
Rated voltage	<50V
Contact resistance	depends on mating connector
Dielectric strength	1000V DC
Insulation resistance	>2G Ω

2. Mechanical parameters

Service life	>1000
Signal line	18AWG
Power lin	1.0mm ²
Cable	4.0-7.0mm


3. Material and environmental parameters

Shell	Zinc diecast
drivepipe	Polyacetal + PU
Contacts	Brass
Contact surface	Ni
Emergency relief	Polyaceta
Inner core	Polyamide
Shell Electroplating	Cr
Temperature range	-20°C to +65°C

4. Standard

Electroplating Standard	IEC 68-2-20
Standard	IEC 60603-11 / EIA RS-453

Product Profile

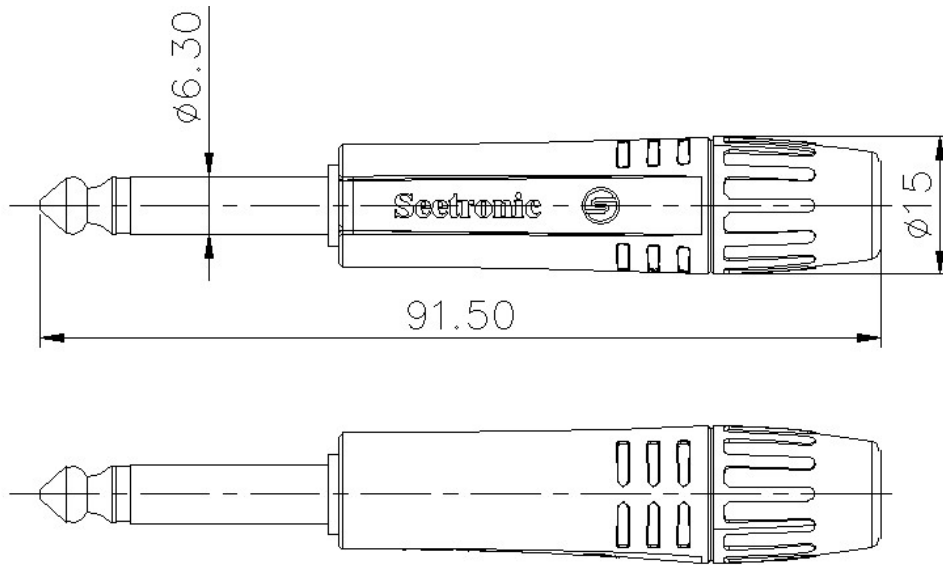

: mm

Installation instructions

