

一、SAC3MCB 产品外观 (Product Appearance)



二、产品特性 (Product features)

- ☑快速简单的锁定系统 (Quick, simple locking system)
- ☑连接可靠 (Connect reliably)
- ☑产品体积小 (Small size of product)

三、技术参数 (Technical parameters)

1. 电气参数 (Electrical parameters)

触点数量 (Contacts NO.)	2+PE
额定电流 (Rated current)	20A
额定电压 (Rated voltage)	250V
接触电阻 (Contact resistance)	$\leq 5\text{m}\Omega$
介电强度 (Dielectric strength)	4kV DC
绝缘电阻 (Insulation resistance)	$> 1000\text{M}\Omega$

2. 机械参数 (Mechanical parameters)

使用寿命 (Service life)	> 1000
电源线径 (Wire diameter)	2.5mm^2
线径范围 (Diameter line)	7mm-12mm
端子接线方式 (Type of terminals)	screw type terminals 螺旋夹紧式


3. 材料和环境 (Material and environmental parameters)

外壳 (Shell)	PA66+30%GF
触点 (Contacts)	Cu alloy
触点表面 (Contact surface)	Ag
阻燃等级 (Flame-retardant grade)	UL94-V0
使用温度范围 (Temperature range)	-30° C to +80° C

4. 标准和规范 (Standard)

标准 (Standard)	IEC61984 /UL1977
---------------	------------------

四、产品外形尺寸 (Product Profile)

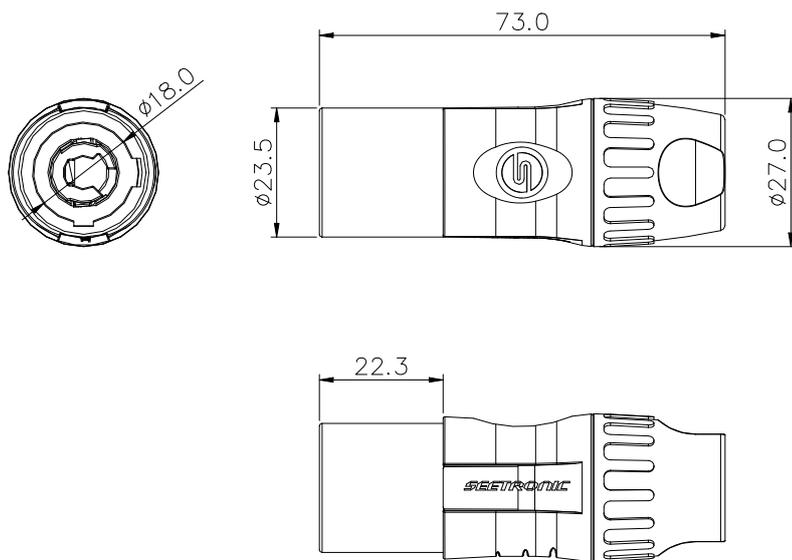

单位: mm

五、安装使用说明 (Installation instructions)

