

TR5E

FLAT SCREEN TROLLEY

FOR 42"-65" SCREENS

TR5E is a universal video conference trolley. The lightweight and minimalist design of powder-coated steel and polished tubes makes it perfect for any interior such as offices, conference rooms and waiting rooms. Adjustable height the screen make TR5 extremely functional. TR5 features a cable management system to hide cables and keep the aesthetic, smart appearance of the entire installation. Castors with a braking mechanism ensure mobility. Thanks to the split vertical tube, the trolley fits into a much smaller package than similar products.

FEATURES

- Simple and quick installation
- Aesthetic design of powder-coated steel and polished tubes
- Adjustable height
- Split vertical pipe
- Cable management system for smart installation
- Includes 4 braked castors
- Possible change of screen adapter

PRODUCT SPECIFICATIONS

Short index	TR5E
Product group	Trolleys & Stands
Category	Flat Screen Trolleys Universal Series
Colour	Black
Warranty	Limited 5-years
Number of screens	1
Minimum screen size	42"
Maximum screen size	65"
Maximum load	50 kg
Height adjustment	Yes
VESA Mounting Compatibility	100x100 up to 600x400



42"-65"



100x100
600x400



50 kg



Fully adjustable height



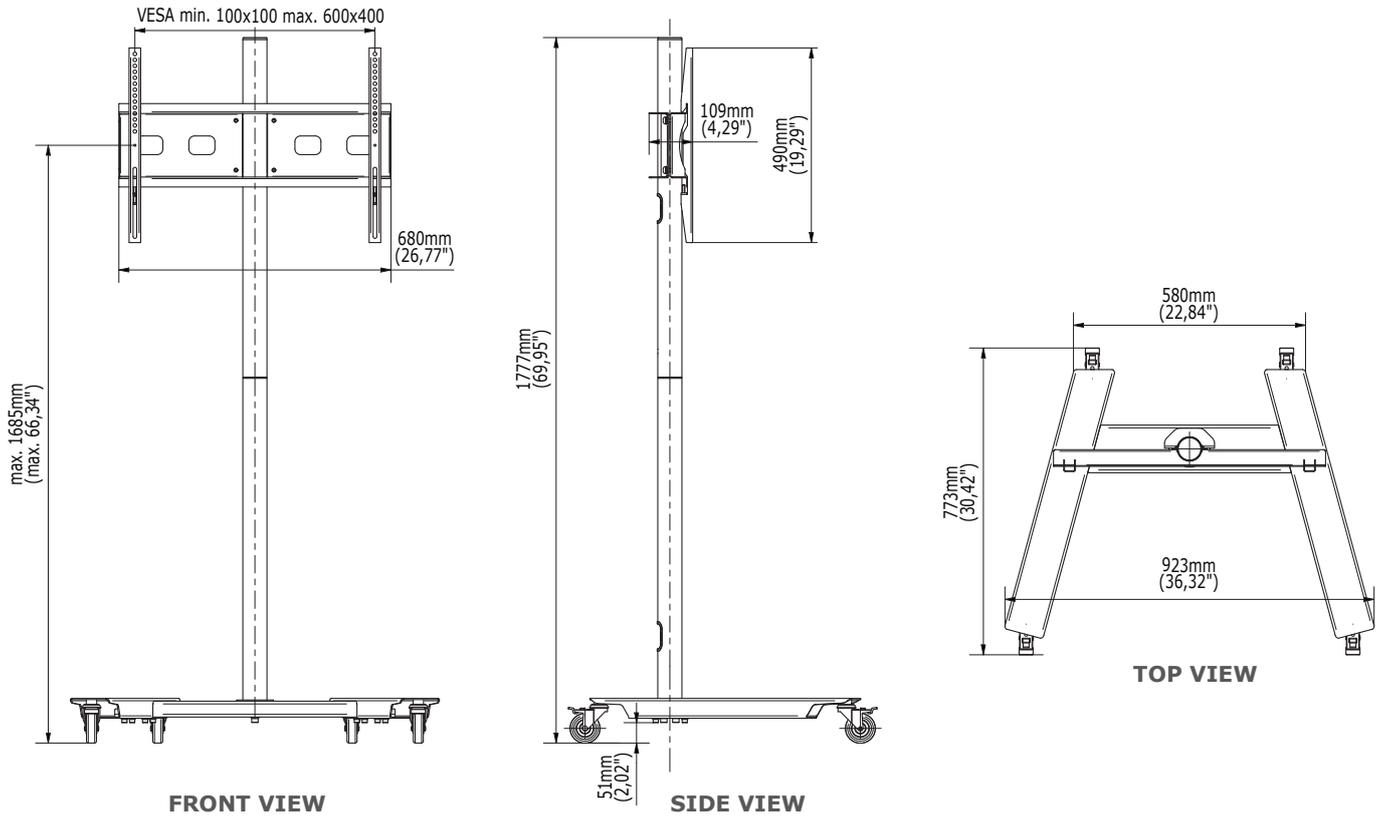
Split vertical pipe



Cable management system



Includes 4 locked castors


TECHNICAL SPECIFICATIONS

Product dimensions	W: 923 mm D: 773 mm H: 1777 mm (W:36,32" D:30,42" H:69,95")
Product weight	25 kg (55,12 lb)
Max. distance from the floor to the center of the screen	1685 mm (66,34")
Min. distance from the floor to the center of the screen	393 mm (15,47")
Max. mounting pattern	600 mm x 400 mm (23,62 x 15,74")
Min. mounting pattern	100 mm x 100 mm (3,93 x 3,93")

LOGISTICS DATA

SAP INDEX	EAN CODE	COLOUR	PACKAGE DIMENSIONS	PACKAGE WEIGHT
WWTR-TR5E	5902841111202	BLACK	987 x 262 x 172 mm 38,85 x 10,31 x 6,77"	29 kg 63,93 lb

HS Code (Harmonized System): 732690, HTS Code (Harmonized Tariff Schedule): 7326909890, Country of Origin: Poland

ACCESSORIES AND RELATED PRODUCTS


CH4/CH5



TRS4



TR51



TR1