

Designed for theaters, concert halls, multipurpose rooms.
For all places where speech intelligibility and sound quality are essential
(voices, instruments, live...)



Active Column Line source Speaker

- Medium (MF): 8 x 6" speakers
- High (HF): 1 x 1" compression driver with plane wave guide

- Power:

- MF: 1600W AES
- HF: 60W AES

- Nominal SPL ⁽¹⁾: 130dB SPL
- Max SPL ⁽²⁾: 133dB SPL

- Freq. response (-6dB): 90Hz - 18kHz
- Directivity (-6dB): 100°H / 25°V



- DSP control :

- Active filters
- Delay
- Inputs and outputs parametric EQs (10 frequencies)
- Limiter / compressor

- Powered by Pascal[®], suitable amplification
- 1 x XLR IN + 1 x XLR OUT
- RJ45 Input to program DSP

⁽¹⁾ theoretical value at long-term RMS power

⁽²⁾ theoretical value at max power handling

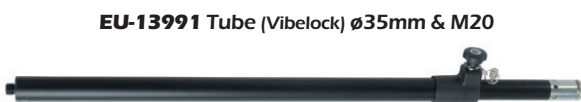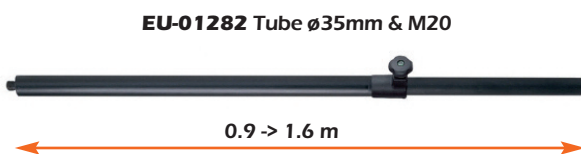



HO-RI-SR20(B/W)
Black or white fixing ball for CLA-810



KM-19780
KIT: Black tilt adapter + Black adaptation plate



KM-24356

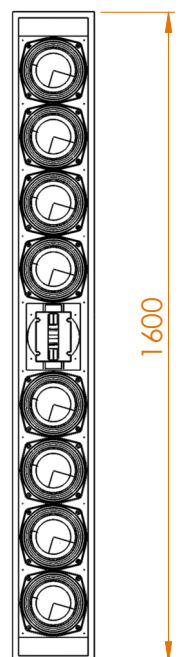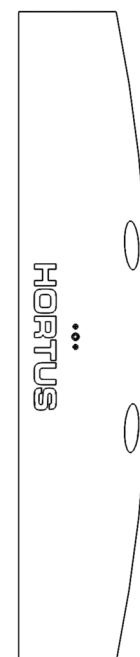

320 200 1600