




3-way broadband active or passive hybrid system  
suitable for vertical or horizontal use

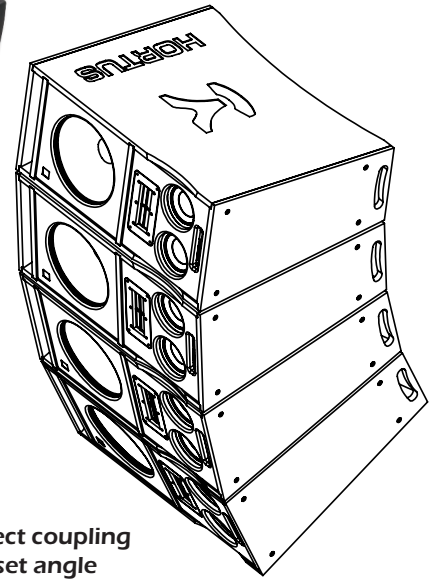

- Bandwith (-6dB) : 50 Hz to 20 KHz
- SPL (Measured) : 123 dB
- SPL (Peak) : 126 dB
- Directivity : 100° H / 60° V
- Passive Filter (MF/HF)
- 1 Flange 35 mm
- Baltic birch wood
- Finish polyurethane painting
- Dim. : H659 x D577 x W303 mm

- Direct coupling
- Preset angle

- LF : 1 x 10"

- MF : 2 x 5"

- HF : Ribbon tweeter

**HO-CSL10P:** passive 2-ways, on 2 Speakon

**HO-CSL10M:** amplified + DSP

- Power supply: 2 x Powercon In/Out
- Pascal Audio amplifier + DSP Ethernet connection
- Amplified 2-way 500 +250 w
- Input on XLR male and female

