


Overview

The Yamaha MY8-DA96 is an optional digital-to-analog output card for compatible Yamaha digital mixing consoles and signal processors. It has eight analog outputs.

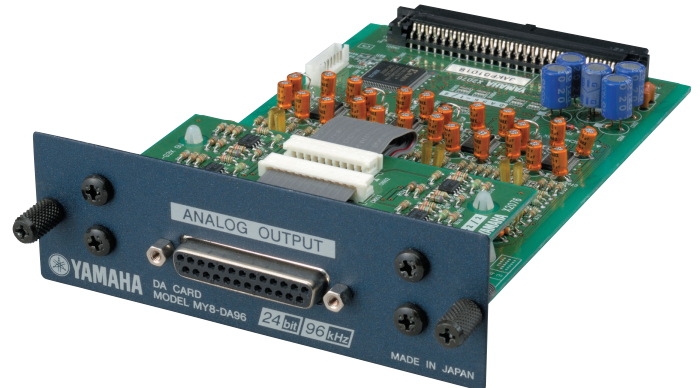

Features

- 24bit resolution, 96kHz compatible 8-out analog audio interface
- 1 x D-sub 25 pin connector (balanced)
- Max output level before clip: +18dBu
- Dimensions: 120mm x 40mm x 176mm (4.7" x 1.6" x 6.9")

Specifications

General Specifications

Channel Count	96kHz compatible 8OUT
Format	Analog
Sampling Frequency	96kHz
Resolution	24bit
Connector	1 x D-sub 25 pin connector

Analog Output Characteristics

Output Terminals	Actual Source Impedance	For Use with Nominal	Output Level		Connector
			Nominal	Max. before Clip	
ANALOG INPUT 1-8	150Ω	10kΩ Lines	+4dB (1.23V)*	+18dB (6.16V)*	D-sub 25 pin female**

* 0 dB is referenced to 0.775 Vrms.


** Output channel 1-8 D-sub connectors are balanced.

Sampling rate: 24bit/128 times oversampling

Pin Assignment

Signal		Input Ch								Open	GND
		1	2	3	4	5	6	7	8		
Pin	Hot	24	10	21	7	18	4	15	1	13	2, 5, 8, 11, 16, 19, 22, 25
	Cold	12	23	9	20	6	17	3	14		

Dimensions

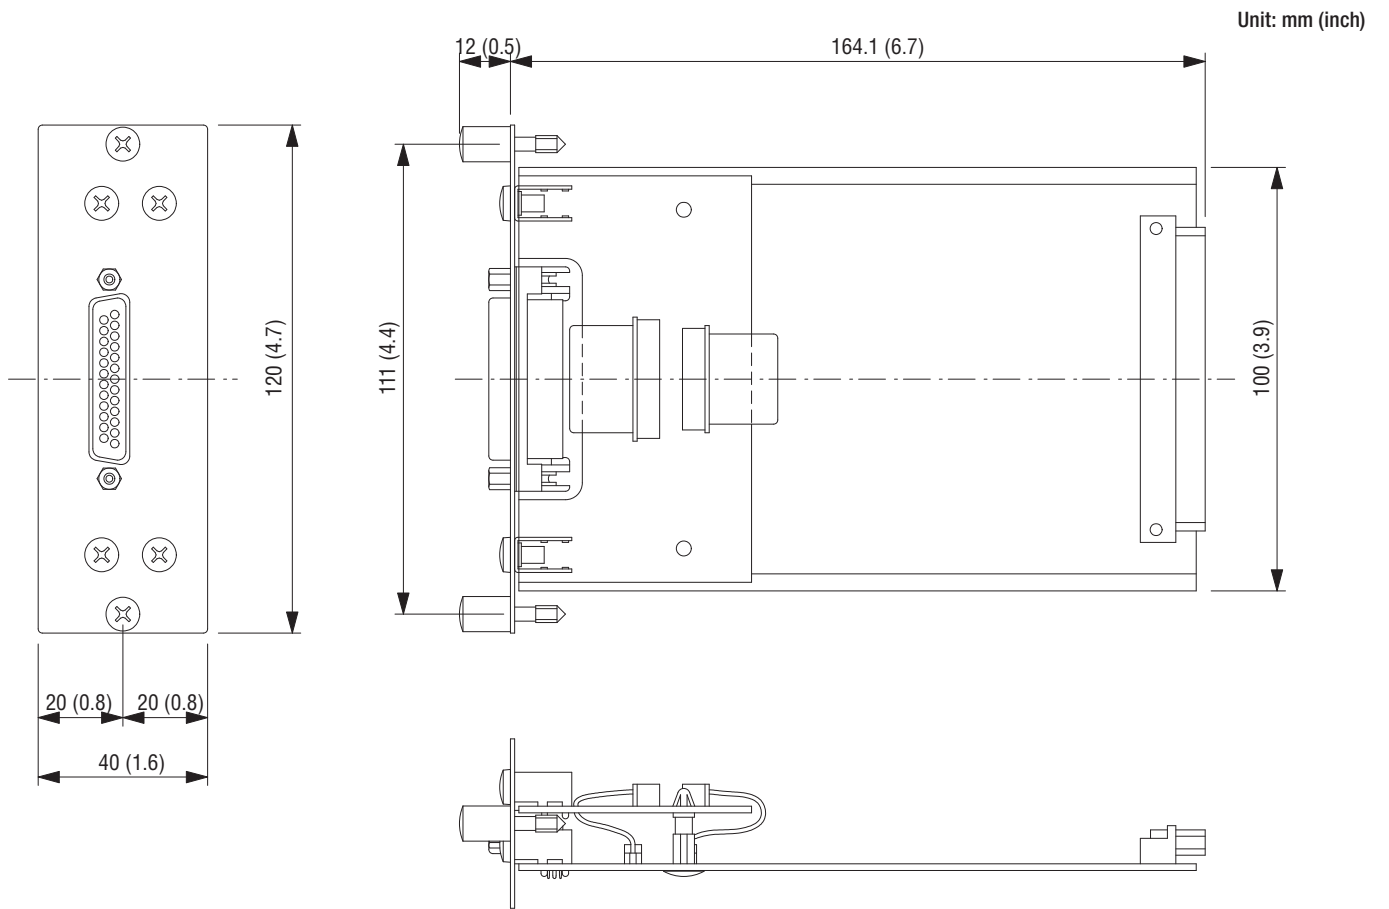

Architectural and Engineering Specifications

The Yamaha MY8-DA96 shall be an optional digital-to-analog output card for compatible Yamaha digital mixing consoles and signal processors. It shall have eight analog outputs available via one D-sub 25-pin connector. Dimensions shall be 120 (W) x 40 (H) x 176 (D) mm.

*All information subject to change without notice.

*All trademarks and registered trademarks are property of their respective owners.

Created in March, 2017

YAMAHA CORPORATION
P.O.BOX 1, Hamamatsu Japan
www.yamahaproaudio.com