

Overview

The CZR10/CZR10W is a 2-way loudspeaker offering high power handling and outstanding sonic performance in a portable, lightweight, yet rugged design. Its versatile, compact enclosure design makes the lightweight CZR10/CZR10W ideal for range of live performance and installed sound environments—from live bands at outdoor festivals to DJ's in clubs—these loudspeakers deliver crystal clear, high-quality sound with impressive low frequency performance.



CZR10



CZR10W

Features

- 2-way loudspeaker with a 2" HF and a 10" LF
- Features Yamaha's own Wide Dispersion CD Waveguide Horn
- High power 700W (PGM) power handling and Bi-amp capable
- Floor monitoring setting enables mirroring configuration
- Lightweight yet very durable plywood cabinet with premium graded Polyurea coating
- Dual-angle pole socket
- Optional speaker cover (SPCVR-DZR10)
- Rotatable horn and variety of U-bracket options (UB-DZR10H/V) for rigging allow for very flexible setup and speaker placement
- Durable black or white finish

Specifications

General Specifications


| | | |
|-------------------------|---|---|
| Speaker Type | 2-way Speaker, Bass-reflex | |
| Frequency Range (-10dB) | Passive: 43Hz - 20kHz, Normal (*1): 46Hz - 20kHz, FOH (*1): 43Hz - 20kHz | |
| Coverage Area | H90° x V60° Rotatable Constant Directivity Horn | |
| Floor Monitor Angle | 50° | |
| Components | LF | 10" Cone, 3" Voice Coil, Neodymium magnet |
| | HF | 2" Voice Coil, 1" Throat Compression Driver, Titanium diaphragm, Neodymium magnet |
| Crossover | 2.5kHz | |
| Power Rating | NOISE | Passive (EIA 426-A): 350W, Bi-amp LF (EIA 426-A): 350W, HF (AES): 50W |
| | PGM | Passive (EIA 426-A): 700W, Bi-amp LF (EIA 426-A): 700W, HF (AES): 100W |
| | PEAK | Passive (EIA 426-A): 1400W, Bi-amp LF (EIA 426-A): 1400W, HF (AES): 200W |
| Nominal Impedance | Passive: 8Ω, Bi-amp: LF: 8Ω, HF: 16Ω | |
| SPL | Sensitivity (1W; 1m on axis) | Passive: 95dB SPL, Bi-amp: LF: 95dB SPL, HF: 108dB SPL |
| | Peak (Calculated) | Passive: 127dB SPL, Bi-amp: LF: 127dB SPL, HF: 131dB SPL |
| I/O Connectors | SpeakON NL4MP x 2 (Parallel) | |
| Handle | Aluminium die-cast, Top x 1, Side x 1 | |
| Pole Socket | Ø35mm x 2 (0° or -7°) | |
| Rigging | M10 x 8, M8 x 2 | |
| Dimensions (W x H x D) | 315mm x 537mm (with rubber feet) x 345mm (12.4" x 21.1" x 13.6") | |
| Net Weight | 14.0kg (30.9lbs) | |
| Options | Bracket: UB-DZR10H/V, Cover: SPCVR-DZR10 | |
| Others | Enclosure Material, Finish, Color: Plywood, Durable Polyurea coating, Black/White | |

*1 With recommended DSP processing.

*2 Half space (2π).

Dimensions

Unit: mm (inch)

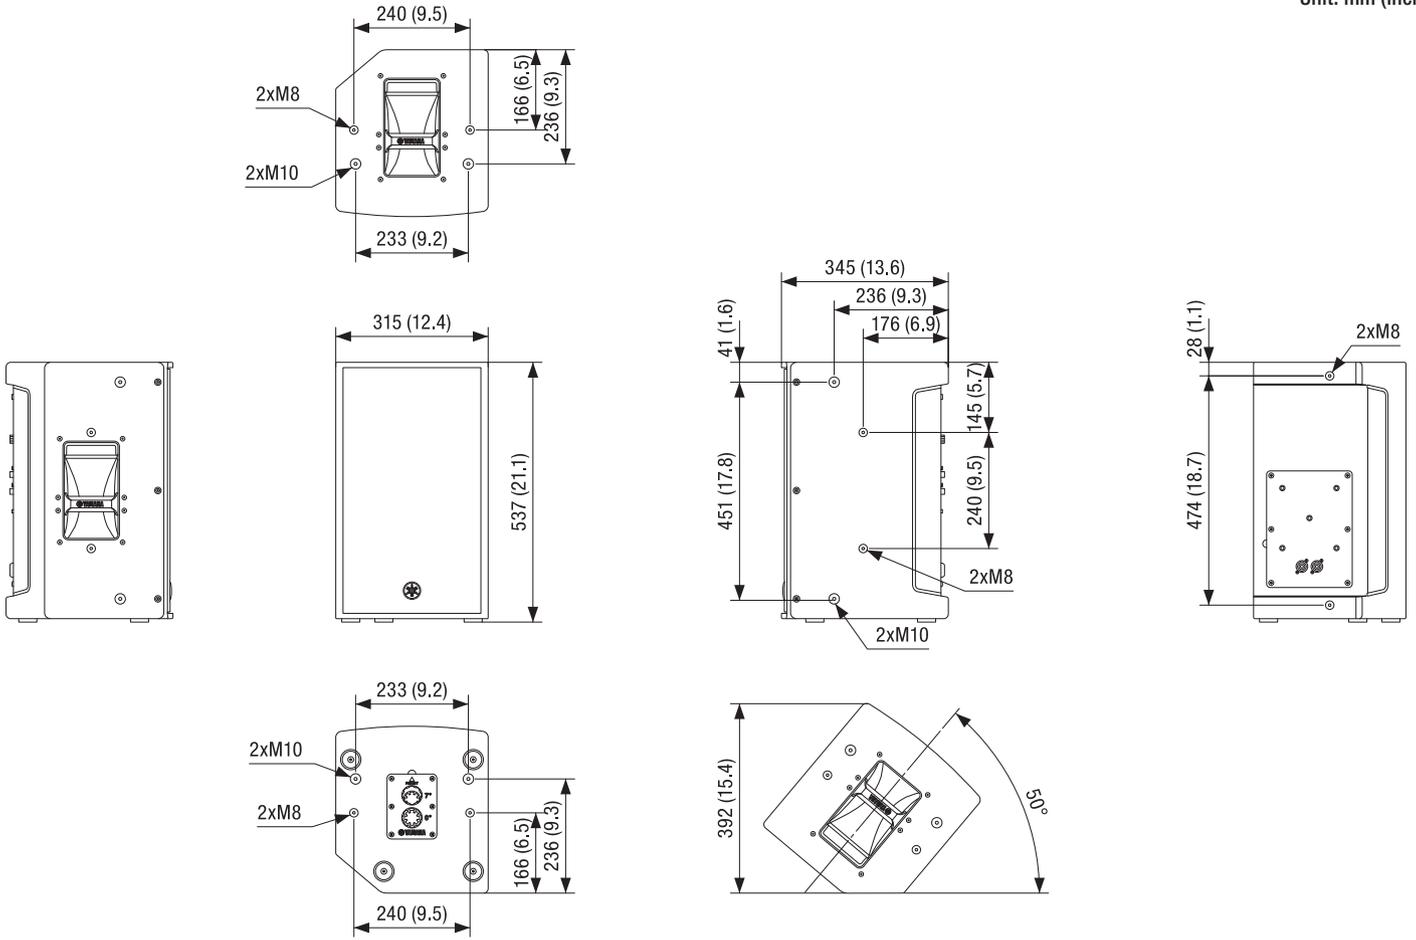

Options

- Speaker Cover SPCVR-DZR10
- U-Brackets UB-DZR10H/UB-DZR10HW/UB-DZR10V/UB-DZR10VW

Architectural and Engineering Specifications


The Yamaha CZR10 shall be a passive loudspeaker for sound reinforcement applications. The loudspeaker shall be a full-range, two-way, bass-reflex type. The loudspeaker shall have one 10" cone low-frequency transducer with a 3" voice coil, and one 1" throat high-frequency compression driver with a 2" voice coil and titanium diaphragm. Continuous program power capacity shall be 700 watts in passive mode, or 700 watts to the LF driver and 100 watts to the HF driver in bi-amplified mode. The crossover frequency of the passive crossover network shall be 2.5 kHz. The loudspeaker shall be capable of meeting the following performance criteria: reproduction frequency range shall be 43 Hz to 20 kHz (-10 dB) when used without equalization, and maximum output SPL shall be 127 dB (peak, pink noise @ 1m, passive mode). Coverage angles shall be 90° horizontal and 60° vertical. The horn shall be rotatable to allow a 90° shift in coverage angles when required. Two parallel-connected SpeakON connectors shall be provided for input.

The loudspeaker shall be designed for full compatibility with the speaker tuning capabilities of Yamaha PX series amplifiers or other speaker processors in order to deliver optimum system performance in a variety of environments.


The loudspeaker enclosure shall be constructed of high-grade plywood and finished with a durable polyurea coating. Rigging points shall be provided for use with standard eyebolts, and optional U Brackets will offer a variety of mounting configurations. The dimensions of the loudspeaker shall be 315 x 537 x 345 mm (W x H x D, including rubber feet). The weight shall be 14.0 kg.

Block Diagrams


Passive mode (Factory setting)

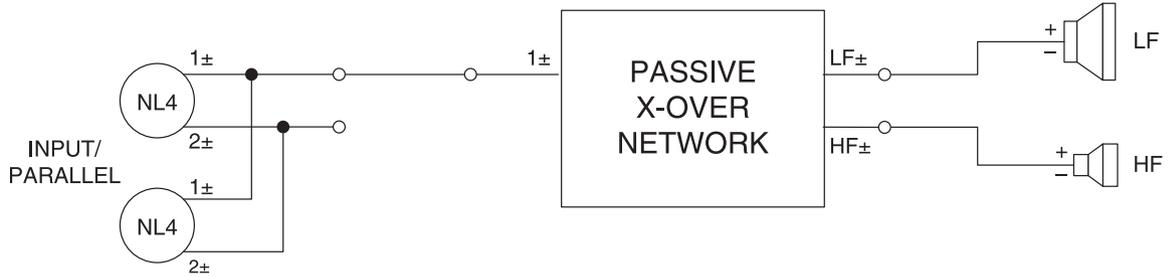


Bi-amp mode (Selectable)

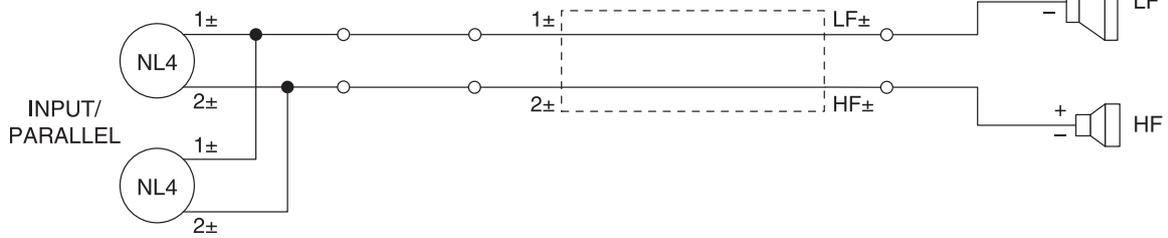

Frequency Response

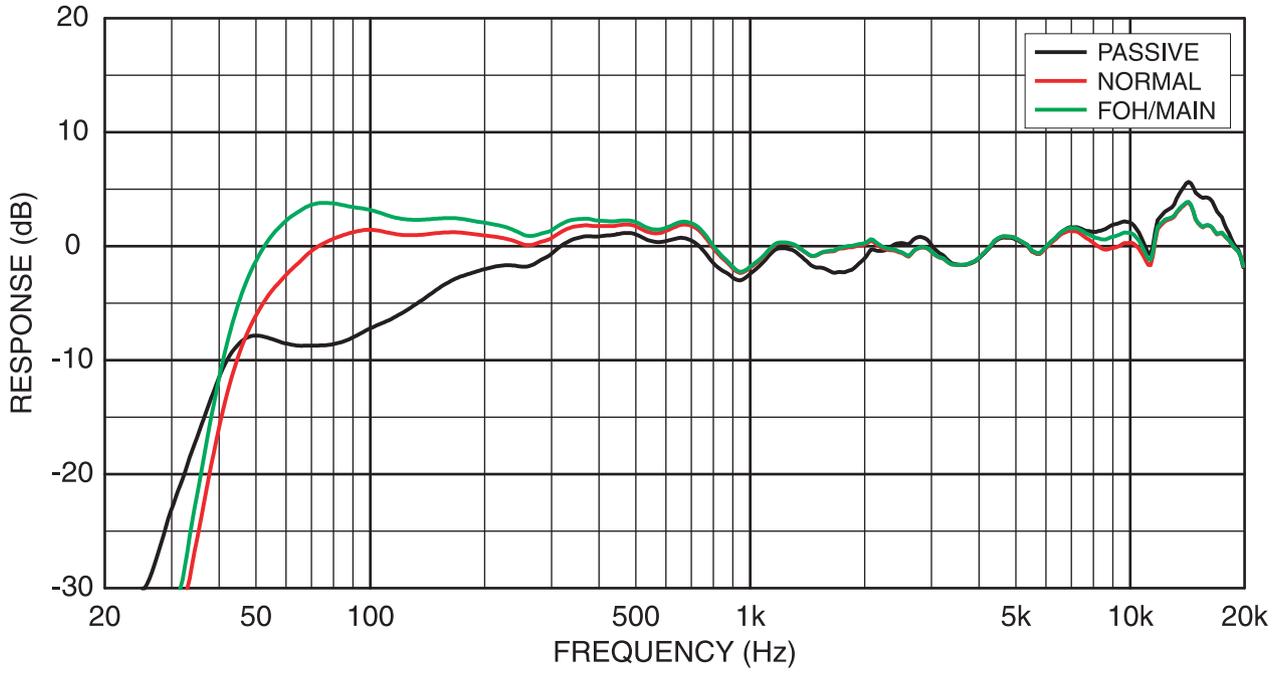


Phase Response

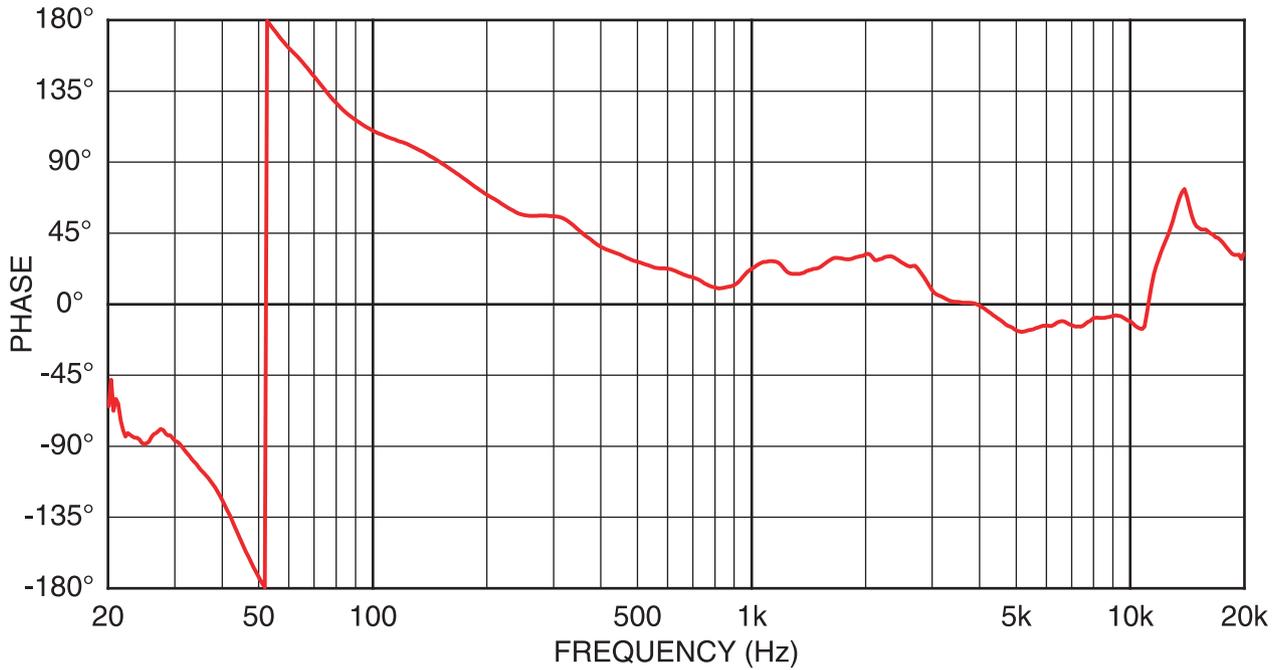


Horizontal Polar Plots

Horizontal

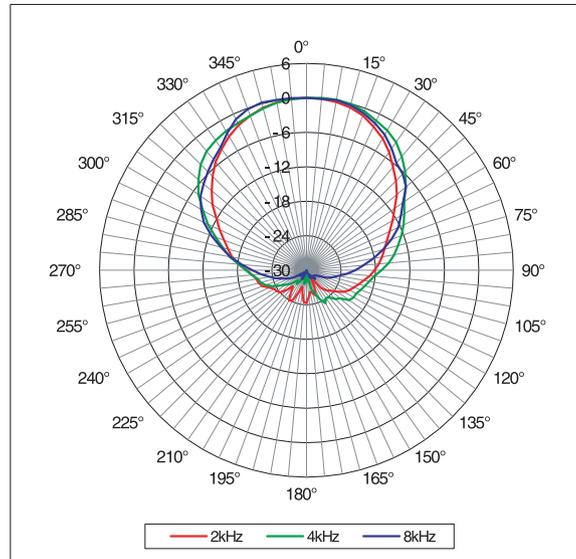

Vertical Polar Plots

Vertical

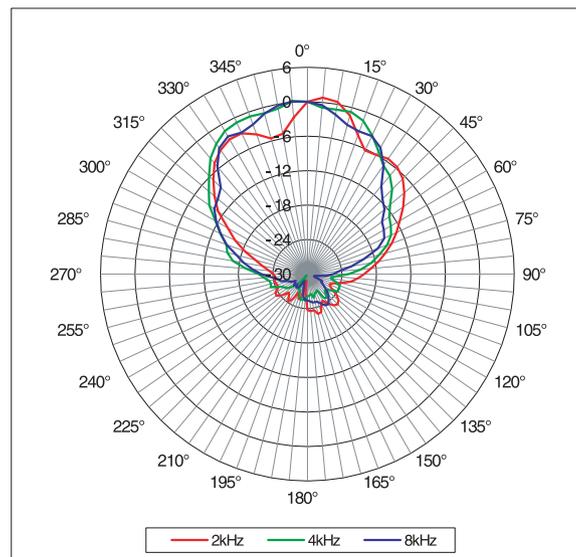

*All information subject to change without notice.

*All trademarks and registered trademarks are property of their respective owners.

Created in June, 2020

YAMAHA CORPORATION
P.O.BOX 1, Hamamatsu Japan
www.yamaha.com/proaudio/