


# UV950E0&E2

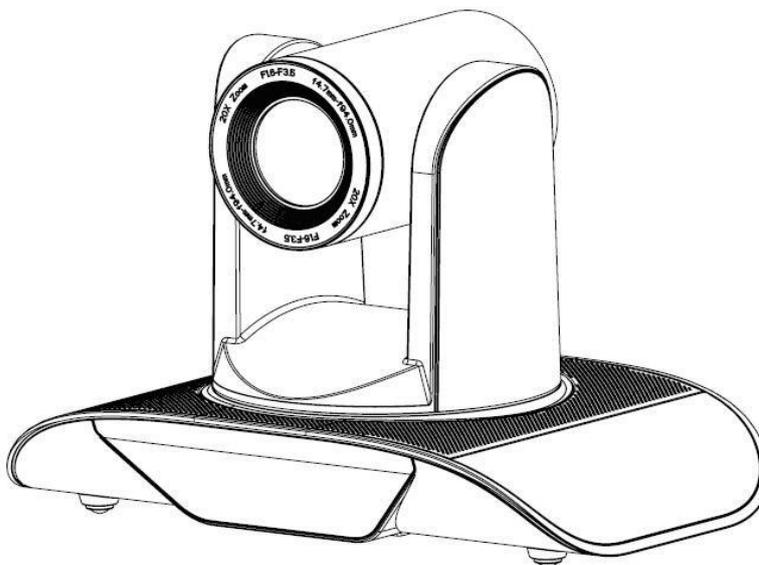

This series camera offers perfect functions, superior performance and rich interfaces. The features include advanced ISP processing algorithms to provide vivid images with a strong sense of depth, high resolution and fantastic color rendition. It supports H.264/H.264+ encoding which makes motion video fluent and clear even with less than ideal bandwidth conditions.

- **Full HD Image:** It employs 1/2.8 inch high quality sensor. Resolution is up to 1920x1080 at frame rate up to 60 fps.
- **Various Optical Zoom Lens:** It has 12X/20X optical zoom lens for options.
- **Leading Auto Focus Technology:** Leading autofocus algorithm allow the camera to focus swiftly, accurately, and stably.
- **Low Noise High SNR:** Low noise CMOS effectively ensure the camera's ultra-high SNR. 2D&3D noise reduction technology furtherly reduce the noise without image comprising.
- **Multi Video Outputs:** Support HDMI, SDI, USB and wired LAN (POE optional) ; the SDI support for 100m transmission at 1080p60 format.
- **Multi Audio Video Compression Standards:** Support H.265/H.264 video compression, support AAC、MP3、G.711A audio compression; support up to 1920x1080 resolution 60 frames/second compression;

- **Audio Input Jacket:** Support 16000, 32000, 44100, 48000 sampling frequency, support AAC、MP3、G.711A audio coding. G.711A coding only support 8000 sampling rate.
- **Multiple Network Protocols:** Support ONVIF, GB/T28181, RTSP, RTMP protocols, and also support RTMP push mode, easily link to streaming media servers (Wowza, FMS); support RTP multicast mode; support network full command VISCA control protocol
- **Control Interface:** RS485, RS232: RS232 supports cascading connection, which is convenient for engineering installation and use.
- **Multiple Control Protocols:** Support VISCA, PELCO-D, PELCO-P protocol, and support automatic identification protocol.
- **Super Quiet PTZ:** High-precision stepping motors and precision motor drive controllers ensure that the pan/tilt runs smoothly at low speeds.
- **Low-power Sleep Function:** Support low-power sleep/wake up, the consumption is lower than 400mW under sleep mode
- **255 Presets Positions:** Up to 255 presets (10 presets by remoter).
- **Various Remote Controls:** Support IR remote control and wireless remote control
- **Wide application:** Applied in remote education, lecture recording, video conference, online training, and tele-medicine.

## Technical Specification

Chart 2-2 Camera Lens Parameter

Parameter/Model	12X	20X
<b>Camera Lens</b>		
<b>Image Sensor</b>	1/2.8 inch high quality HD CMOS sensor	
<b>Effective Pixel</b>	16:9, 2.07 megapixel	
<b>Video Signal</b>	<b>HDMI/SDI:</b> 1080P60/50/30/25/59.94/29.97; 1080I60/50/59.94; 720P60/50/59.94/ <b>U2:</b>	

	320x240/352x288/640x360/640x480/704x576/704x480/720x576/800x448/800x600/960x540/1024x576/1024x768/1280x720/1920x1080P30/25/20/15/10/5	
<b>Optical Zoom</b>	12X f=3.9~46.8mm	20X f = 5.5~110mm
<b>Viewing Angle</b>	6.6° (N) 70.4° (W)	3.3° (N) 54.7° (W)
<b>Iris</b>	F1.8 – F2.4	F1.6 – F3.5
<b>Digital Zoom</b>	X10	
<b>Minimum Illumination</b>	0.5Lux(F1.8, AGC ON)	
<b>DNR</b>	2D & 3D	
<b>White Balance</b>	Auto/Manual/One-push 3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K	
<b>Focus</b>	Auto/Manual/One-push	
<b>Iris</b>	On/off	
<b>Electronic Shutter</b>	On/off	
<b>BLC</b>	On/off	
<b>Dynamic Range</b>	Off/dynamic level adjustment	
<b>Video Adjustment</b>	Brightness, Contrast, Sharpness, Horizontal Flip, Vertical Flip(display when auto flip off). BW Mode, Gamma Curve, Electronic Zoom, DCI, Lens Distortion Calibration	
<b>SNR</b>	>55dB	

Chart 2-3 Interface Parameter

Interface Parameter	
<b>Interfaces</b>	HDMI, SDI, LAN(Support POE), USB2.0, A-IN, RS232-IN, RS232-OUT, RS 485, Rotary Dial, DC12V Power Switch.
<b>Video Output</b>	HDMI, SDI, LAN, USB2.0
<b>Video</b>	LAN: H.264, H.265

<b>Compression Format</b>	USB 2.0: MJPG, H264, H.265, YUY2, NV12
<b>Audio Input Interface</b>	Double track 3.5mm linear input;
<b>Audio Output Interface</b>	HDMI, LAN, USB2.0
<b>Audio Compression Format</b>	AAC, MP3, G.711A
<b>LAN Interface</b>	100M network port, POE Optional, support audio video output
<b>Network Protocol</b>	RTSP/RTMP,ONVIF,GBT28181 Support network VISCA control protocol; Support remote upgrade, remote restart, remote reset
<b>Control Interface</b>	RS232-IN, RS232-OUT, RS485
<b>Serial Port Communication Protocols</b>	VISCA/Pelco-D/Pelco-P; Support Baudrate: 115200/38400/9600/4800/2400
<b>USB Communication Protocol</b>	UVC (Video Communication Protocol) , UAC (Audio Communication Protocol)
<b>Power Supply</b>	HEC3800 Power Socket(DC12V)
<b>Power Adapter</b>	Input: AC110V~AC220V ; Output: DC12V/1.5A
<b>Input Voltage</b>	DC12V±10%
<b>Input</b>	<1A
<b>Consumption</b>	<12W

Chart 2-4 PTZ Parameter

<b>PTZ Parameter</b>	
<b>Pan Move</b>	-170°~+170°
<b>Tilt Move</b>	-30°~+30° °

<b>Pan Speed</b>	0.1°/s~100°/s
<b>Tilt Speed</b>	0.1°/s~30°/s
<b>Preset Speed</b>	Pan: 60°/s, Tilt: 30°/s
<b>Preset Quantity</b>	Up to 255 preset (10 via remote control)

Chart 2-5 Other Parameter

<b>Other Parameter</b>	
<b>Storage Temperature</b>	-10°C ~ +60°C
<b>Storage Humidity</b>	20%~95%
<b>Working Temperature</b>	-10°C ~ +50°C
<b>Working Humidity</b>	20%~80%
<b>Dimension</b>	253.5 (L) mm×144mm (W) ×169mm (D)
<b>Weight</b>	1.46kg
<b>Environment</b>	Indoors

Chart 2-6 Accessory Parameter

<b>Accessory</b>	
<b>Supplied Accessory</b>	Power Adapter, RS232 Cable, Remote Control, User Manual
<b>Optional Accessory</b>	Mounting Bracket

# Dimension

