

# Mirror-Kit systems

## for projectors

### **Mirror-Kit systems for projectors**

**For the integration of projectors in the ceiling,**

*for example in the board room, home cinema, auditorium or conference hall.*

*The interior finish looks more streamlined with the projector out of sight – and the noise is reduced*



**Audipack®**

*It's great to have solutions...*

# Integration of a projector

## into the Ceiling...

**or in a cabinet or table, so that the projector is out of sight and less audible!**

The Mirror-Kit is a practical and durable solution for the integration of a projector into the ceiling. For example in a boardroom, home cinema, auditorium or conference hall.

The projector is fixed permanently above the ceiling, resulting in less noise to detract from the presentation and invisibility of the projector.

Audipack Mirror-Kits are available in various dimensions and versions. They are available in dynamic (motorised) and static (non-motorised) versions.



### How does it work

The Mirror-Kit works like a periscope. The projected image from the projector is deflected by two highly reflective mirrors onto the projection screen. The larger, lower mirror is motorised and can be activated by a general control system.

- ▲ **Motorized table and ceiling versions**
- ▲ **Static ceiling versions**
- ▲ **Quick installation**
- ▲ **Low noise engine**

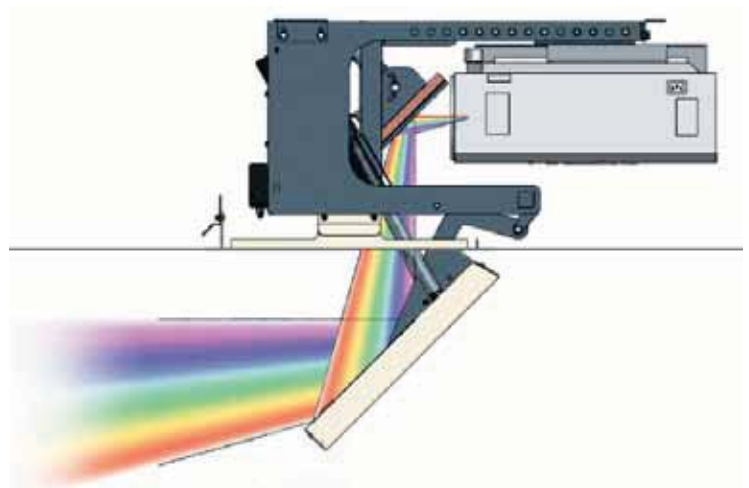


Table Mirror-Kit versions available



Standard ceiling finishing











Special projection mirror

## WIDE SCREEN MOTORIZED CEILING MIRROR-KITS





Power supply:

**110-230 VAC 50-60 Hz/24 VDC**

<b>Ref.</b>	<b>MKT-150WS</b>	
Dimensions in mm	W 620 x D 741 x H 368	 
Max. projector dimensions in mm	W 500 x D 600 x H 150	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	35 Kg	
Aspect ratio	4:3, 16:9, 16:10	
Connectivity	Contact relay, Optional: wall switch or IR/RF remote	
<b>Ref.</b>	<b>MKT-200WS</b>	
Dimensions in mm	W 660 x D 751 x H 418	 
Max. projector dimensions in mm	W 500 x D 600 x H 200	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	37 Kg	
Aspect ratio	4:3, 16:9, 16:10	
Connectivity	Contact relay, Optional: wall switch or IR/RF remote	
<b>Ref.</b>	<b>MKT-250WS</b>	
Dimensions in mm	W 650 x D 751 x H 470	 
Max. projector dimensions in mm	W 550 x D 650 x H 250	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	26 Kg	
Aspect ratio	4:3, 16:9, 16:10	
Connectivity	Contact relay, Optional: wall switch or IR/RF remote	
<b>Ref.</b>	<b>MKT-265WS</b>	
Dimensions in mm	W 735 x D 1040 x H 500	 
Max. projector dimensions in mm	W 600 x D 650 x H 265	
Min. allowed lens ratio from approx.	1.3:1	
Nett weight	60 Kg	
Aspect ratio	4:3, 16:9, 16:10	
Connectivity	Contact relay, Optional: wall switch or IR/RF remote	



## COMPACT MOTORIZED MIRROR-KIT





<b>Ref.</b>	<b>MKT-C150</b>	
Dimensions in mm	W 560 x D 790 x H 211	 
Max. projector dimensions in mm	W 465 x D 450 x H 150	
Min. allowed lens ratio from approx.	1.3:1	
Aspect ratio	4:3, 16:9, 16:10	
Connectivity	Contact relay Optional wall switch or IR/RF remote	

## STATIC CEILING MIRROR-KITS (NON-MOTORIZED)



<b>Ref.</b>	<b>MKT-S195</b>	
Dimensions in mm	W 415 x D 555 x H 325	 
Mirror dimensions	Square W 300 x H 250	
Min. / Max. projector height in mm	95 / 195	
Max. allowed lens ratio from aprox.	1.3:1	
Nett weight	8 Kg	
Aspect ratio	4:3, 16:9, 16:10	



<b>Ref.</b>	<b>P2883*</b>	
Dimensions in mm	W 150 x D 150 x H 480	 
Mirror dimensions	Square W 250 x H 250	
Min. / Max. projector height in mm	95 / 200	
Nett weight	12 Kg	
Aspect ratio	4:3, 16:9, 16:10	

\* The projector is mounted vertically and must be able to work in that position

MIRROR-KIT SYSTEMS

FLOOR PROJECTION UNIT



Ref.	P2817
Dimensions in mm	W 465 x D 250 x H 225-260
Mirror dimensions in mm	Square W 200 x H 200
Nett weight	10 Kg
Aspect ratio	4:3, 16:10
Max. lens offset in mm	90



To be used with the Audipack ceiling mounts **390061** and **390065**, page 127.

ACCESSORIES

PROJECTOR MOUNTS (SEE PAGE 121 FOR THE FULL PROGRAM)

Mount any brand and type of projector on any Audipack system with the Audipack projector mounts.



Quatro-Fix®



Brand related mounts

SERVICE HATCHES

Internal hatch dimensions:  
430 x 430 mm



Ref.	P1913	P5066
Type	Service hatch for normal ceilings	Service hatch for plastered ceilings

CONNECTIVITY



<b>260214</b> IR remote control (internal)	<b>260215</b> RF remote control (internal)	<b>261318</b> Wall switch
---	---	------------------------------