




**L O U D**  
OF SWEDEN

## Wireless Speaker S1

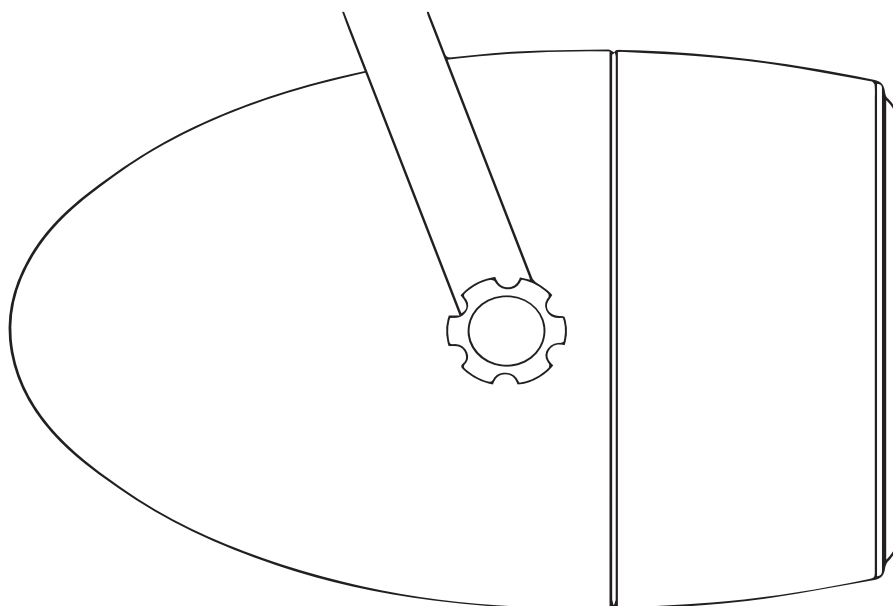

65 - 20 000 Hz

Wireless Local Gateway

Coaxial driver with 0.75" soft dome tweeter

4,5" woofer

HIFI graded

Global 3-phase adapter for trackmount included

50 channels, digital RF encrypted

Separate volume

Mains voltage	Input: 230V AC, 50Hz
Power consumption, operation	30W
Operating wireless frequency	2400 - 2483,5 GHz Wireless Local Gateway
Frequency range	60 - 20 000 Hz
Power rating RMS	30 W
Sensitivity	90dB
Input	Wireless,
Input	Unbalanced 3,5 mm aux
Line out	Unbalanced 3,5 mm aux
Weight	1500g
Width	160 mm
Depth	220 mm
Height	160 mm
Colour	White, black