

HDMI Optical Output Board Including 4K, 3D and Deep Color with Reclocking Function

Part No: 9113 0030 (LC), 9113 0032 (SC), 9113 0033 (NT)



Features:

- Built-in HDMI to fiber converter
- Selectable connectors: Neutrik OpticalCON, -LC, -SC
- Four status LEDs per port: receiver detect, signal detect, HDCP enabled, Laser active
- No video compression
- Zero frame delay
- Extension distance: 2500 m (up to 1920 x 1200 @ 60Hz), 1100m (4096 x 2048 @ 30Hz)
- HDMI 1.4a; DVI and HDCP compliant
- 4K / UHD (30Hz RGB 4:4:4, 60Hz YCbCr 4:2:0), HD video and all 3D formats are supported
- 36-bit deep color support
- Dolby TrueHD and DTS-HD Master Audio
- Advanced EDID Management and Frame Detector
- Pixel Accurate Reclocking
- Built-in test pattern generator
- One bi-directional RS-232 channel per port

MX-HDMI-OPT-OB-R is an eight channel multimode optical output board providing HDMI 1.4, audio and RS-232 extension over a single multimode fiber up to 2500m distance. Pixel Accurate Reclocking, HDCP compliance and HDMI to DVI conversion are all incorporated. Resolutions up to 4K / UHD (30Hz RGB 4:4:4, 60Hz YCbCr 4:2:0) and 36-bit color depth are handled with all standard audio formats as well as 120Hz 3D signals.

Along the video and audio extension the unit provides a bi-directional RS-232 option for remote controlling external devices like projectors or professional media players.

The video signals with the HDCP, EDID handshaking data and the RS-232 channel traffic are performed over one Multimode fiber utilizing our Single Fiber Technology. The board is compatible with Dolby TrueHD and DTS-HD audio while Pixel Accurate Reclocking, Advanced EDID Management, Frame detector and built-in test pattern generator are integrated ensuring professional setup and operation. The board is available with Neutrik OpticalCON, -LC, -SC connectors.

Compatible Products:

- Receivers:
 - DVI-OPT-RX110 (DVI only, without HDCP and RS-232)
 - DVI-OPT-RX220-Pro (DVI only, without HDCP and RS-232)
 - HDMI-OPT-RX100 (up to 1080p60 36bpp, without RS-232)
 - HDMI-OPT-RX100R (up to 1080p60 36bpp)
 - HDMI-OPT-RX200R (up to 1080p60 36bpp)
 - HDMI-3D-OPT-RX150RA (up to 4K)
 - MX-HDMI-OPT-IB (up to 4K)
 - 25G-MX-HDMI-OPT-IB

Maximum Extension Distances

	OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)
1920x1080p@60Hz 24 bpp	250 m	600 m	1200 m	2500 m
1920x1080p@60Hz 36 bpp	150 m	400 m	800 m	1300 m
4096x2048@30Hz 24bpp	Not supported	350 m	700 m	1100 m



MX-HDMI-OPT-OB-R-LC



MX-HDMI-OPT-OB-R-SC




MX-HDMI-OPT-OB-R-NT

Specifications

HDCP compliancy:	Yes
RS232 passthrough:	9600, 19200, 38400, 57600, 115200 baud/s; 8-N-1 (max. 60 bytes/message)
3D signal compatibility:	Frame packing, side-by-side, top-bottom
Power consumption (3.3 V) (all connector type):	1.4 A (typ.), 1.5 A (max.)
Power consumption (5 V) (all connector type):	0.9 A (typ.), 1.5 A (max.)
Calculated AC Power (all connector type):	9.2 W (typ.), 12.5 W (max.)
Heat dissipation (all connector type):	32 BTU/h (typ.), 43 BTU/h (max.)
Weight MX-HDMI-OPT-OB-R:	1350 g (LC, SC) 1500 g (NT)
Output connectors:	LC, NT, SC
Optical wavelengths:	778 nm, 800 nm, 825 nm, 850 nm, 911 nm, 980 nm

Available Patterns:

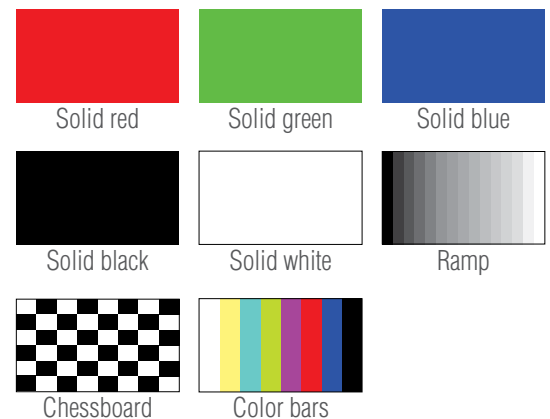

Test pattern generator video formats:

480p, 576p, 720p, 1080p, 1080p deep color