for projectors

Audipack truss mounts, ideal for rental & staging

Audipack truss mounts offer flexible installation options and secure features



Safe and solid

truss mounting



- Fine pitch, pixel on pixel adjustmentRigid and safe construction
- Any configuration possible
- ▲ Very flexible
- ▲ Integrated cable ducts



399941Stainless steel security cable

Do you need easy and quick projector truss mounting? Use the Audipack truss mounts!

Audipack offers a wide range of truss mountable projector mounts and solutions. To address different applications, Audipack offers specific solutions, from a simple projector mount to sophisticated 3D adjustment features. The mounts allow a quick and safe installation to be performed every time.

The **UTC range** offers a universal but very flexible and well-designed mounting range for projectors up to 30kg. Light weight, tolerance free and with integrated ball joints for perfect screen alignment.

The **Quick release** product line is distinguished by its unique separable ball joint and is the safest way for installing projectors up to 52kg to trusses. After installing the tube set, just click the projector to the tube set - 'click and go'.

Align the projector to the screen with the ball joint or even with the optional 3D adjustment *(QR-plus)* or linear adjustment *(QR-plus+)*; ideal for seamless projection.

Quick release, the perfect AV rental solution ...

Look no further for a ceiling mount that allows the fast and easy exchange of projectors. The quick release ball joint allows swift and safe installation. Especially designed for professional rental and stage use.





Perfect adjustment with telescopic feature



Cable passage





Cable passage

TRUSS MOUNTS WITH STANDARD BALL JOINT Ref. UTC-0150B Length in mm 150 15° + 15° Angle adjustment in degrees Ref. UTC-0300B Length in mm 300 15° + 15° Angle adjustment in degrees UTC-1000TB Ref. Length in mm 604-1000 Angle adjustment in degrees 15° + 15°

d A		Ref.	<i>392167</i>	
	75	Length in mm	252	
*		Angle adjustment in degrees	30° + 30°	50 S
		Ref.	392166	
	T	Length in mm	760-1000	
	#	Angle adjustment in degrees	30° + 30°	Max.

	Ref.	<i>392367</i>	
- 59	Length in mm	303	
Pione	Angle adjustment in degrees	30° + 30°	Max. 50
	Fine tune adjustment in degrees	-3°, +3°	
	Ref.	392366	
-			
1	Length in mm	811-1051	
I	Length in mm Angle adjustment in degrees	811-1051 30° + 30°	Max.

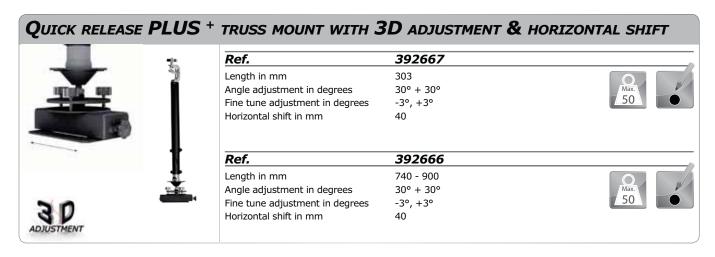

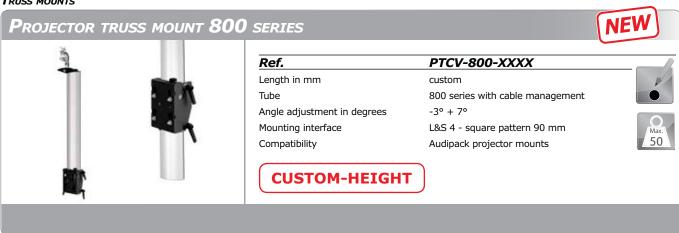

ACCESSORIES









