

Wall mount solutions

for flat panels

The Audipack wall mounts,

are a range of products that offer perfect solutions for Pro AV use or permanent installations.



Audipack®

It's great to have solutions...

Flexible, strong and Innovative!



The **Professional temporarily AV wall mounts** are specifically designed for professional installations. The special Lock&Secure mounting interfaces guarantees a quick installation and panel switch if required. Especially suitable for projects, public places, convention centres etc. To install your flat panel to an Audipack ProAV wall mount an additional flat panel bracket is needed.

- ▲ **Fast and easy installation**
- ▲ **Quick flat panel installation and removal**
- ▲ **Theft delay**
- ▲ **Very rigid design**



Thin wall mounts



Angle adjustment



Screw cup detail®



Flexible mounting range



(registered product)

A wide range of VESA and universal mounts is available. All our flat panels wall mounts are safe and easy to install and are available for flat panels up to 120 inch diagonal.



The professional wall mounts on the next pages are combined with L&S3 or L&S5 monitor brackets.

See the 'Mounting brackets for flat panels' section on page 47 for an overview of the available brackets.



WALL MOUNTS **TEMPORARY INSTALLATION & RENTAL**

L&S 5 MOUNT



Ref. 390967
 Dimensions in mm W 340 x D 18 x H 286
 Mounting interface L&S 5

TILTABLE L&S 5 MOUNT

NEW



Ref. 390657
 Dimensions in mm W 359 x D 41 x H 320
 Mounting interface L&S 5
 Tilt adjustment -10° / 0° / +10°
 Optional lock numeric:230052

WALL MOUNTS **PERMANENT INSTALLATION**

PERMANENT INSTALLATION - MULTI VESA



Ref. 390838
 Dimensions in mm W 120 x D 22 x H 122
 VESA 75 & 100



Ref. 390839
 Dimensions in mm W 120 x D 22 x H 162
 VESA 75 & 100
 Tilt adjustment in degrees +5



Ref. 390840
 Dimensions in mm W 269 x D 28 x H 250
 VESA 75, 100 & 200



2-POINT WALL MOUNT



Ref. FWM-V402
 Dimensions in mm W 400 x D 21 x H 530
 Max. mounting range in mm W 400
 Positioning Landscape and portrait



Ref. FWM-V600
 Dimensions in mm W 660 x D 21 x H 500
 Max. mounting range in mm W 600
 Positioning Landscape and portrait



PERMANENT INSTALLATION - MULTI VESA




For Ultra thin LED screens

Ref. FWM-V200
 Dimensions in mm W 320 x D 12 x H 260
 VESA width 75, 100 & 200
 VESA height 75, 100 & 200



For Ultra thin LED screens

Ref. FWM-V400
 Dimensions in mm W 460 x D 12 x H 520
 VESA width 200, 300 & 400
 VESA height 200, 300 & 400



Including flat panel installation materials



Ref. FWM-V900
 Dimensions in mm W 1004 x D 30 x H 966
 Max. mounting range in mm W 900 x H 600



Please refer to www.audipack.com for brand related large screen wall mounts


TILTABLE WALL MOUNT WITH EQUIPMENT CABINET BEHIND SCREEN

NEW

Inclusive Align® installation feature



Ref. FWM-V400EC
 Dimensions W 605 x D 85 x H 480 mm
 Max. range mounting points W 470 x H 460 mm
 Tilt adjustment in degrees -15 / 0 / +15
 Equipment cabinet behind screen




WALL MOUNTS

PERMANENT INSTALLATION - PULL TO RELEASE - UNIVERSAL

NEW




Ref.	FWM-V6FLEX
Max. mounting range in mm	W (free adjustable) x H 600
Depth in mm	flat 80, extended 350
Optional lock	numeric:230052 

The FWM-V6FLEX a is heavy duty wall mount for large flat screens. By pulling the cords, the wall mount is released and comes forward to give access for service.



PERMANENT INSTALLATION - UNIVERSAL

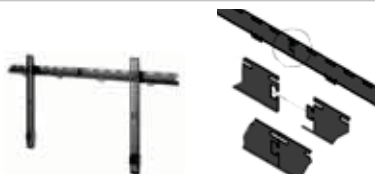

Ref.	392696	392698
Dimensions in mm	W 1550 x D 50 x H 800	W 1550 x D 50 x H 1290
Max. mounting range connected	W 1495 x H 740	W 1495 x H 1290
Max. mounting range open	W 2000 x H 740	W 3000 x H 1290



Ref.	392585
Dimensions in mm approx.	2 x W 139 x D 44 x H 830
Max. mounting range in mm	W 1500 x H 800

Heavy duty wall mount, easy to install.



Ref.	FWM-2688
Dimensions in mm	W 540 x D 60 x H 380
Max. mounting range in mm	W 470 x H 360
Min. mounting range in mm	W 80
Tilt adjustment in degrees	0 / +10°



Lock the bracket with the optional lock
Ref.: 230052(numeric)

Ref.	FWM-2690
Dimensions in mm	W 740 x D 60 x H 500
Max. mounting range in mm	W 670 x H 446
Min. mounting range in mm	W 227,5
Tilt adjustment in degrees	0 / +10°



Ref.	FWM-688
Dimensions in mm	W 530 x D 28 x H 400
Max. mounting range in mm	W 470 x H 360
Min. mounting range in mm	W 88



Lock the bracket with the optional lock
Ref.: 230052(numeric)

Ref.	FWM-690
Dimensions in mm	W 728 x D 28 x H 500
Max. mounting range in mm	W 670 x H 446
Min. mounting range in mm	W 174



Ref.	FWM-688P
Dimensions in mm	W 530 x D 28 x H 650
Max. mounting range in mm	W 470 x H 600
Min. mounting range in mm	W 88



Lock the bracket with the optional lock
Ref.: 230052(numeric)

Ref.	FWM-690P
Dimensions in mm	W 730 x D 28 x H 650
Max. mounting range in mm	W 670 x H 600
Min. mounting range in mm	W 174



SCREEN-CRAWLER (INSTALLATION AID)

Ref. SC-190 + SC-200 (Installation aid for installing large, heavy screens. See page 53)