


# BJ-PRO

BJ-PRO-BASIC – BJ-PRO-01 – BJ-PRO-02

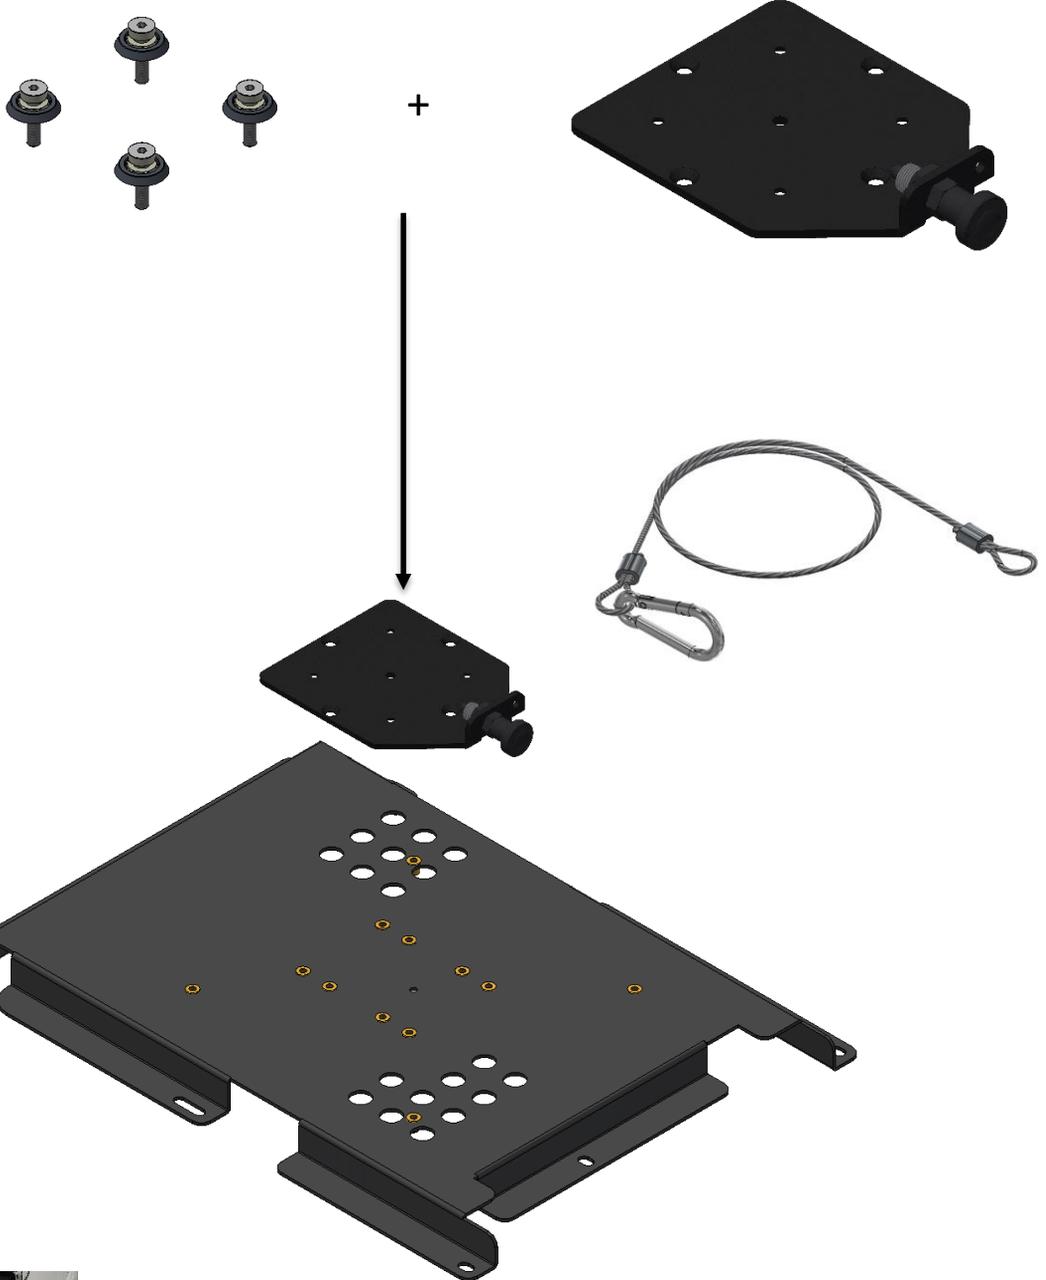


- Check every year bolt connections and general state of the ball-joint.
- Repair only by performed by Audipack
- Do not over tighten bolts and do not exceed max load.


Max vertical load:

BJ-PRO-BASIC	200 Kg
BJ-PRO-01	200 Kg
BJ-PRO-02	250 Kg

# TRUSS ball-joint BJ-PRO-01

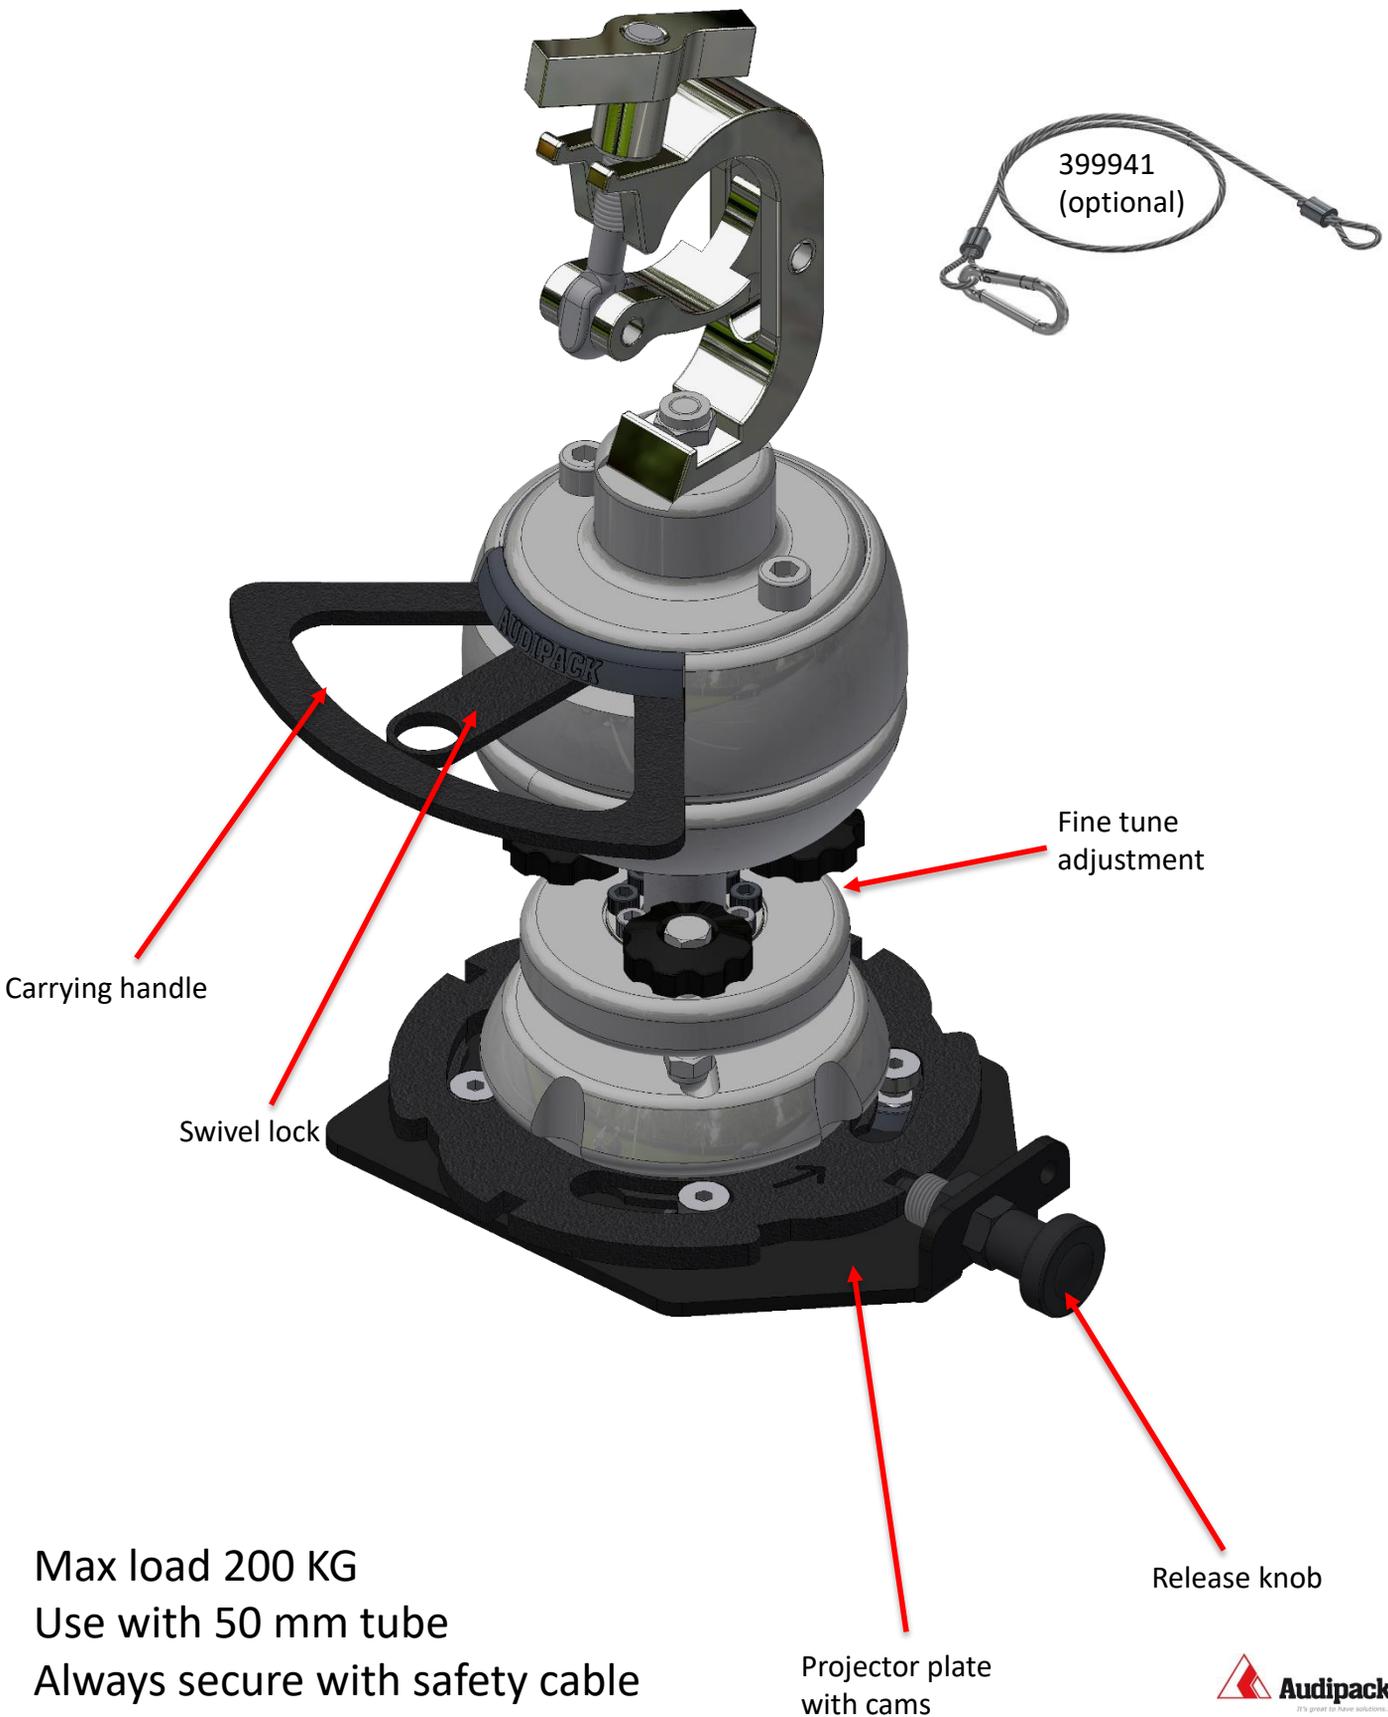

# TRUSS ball-joint BJ-PRO-02

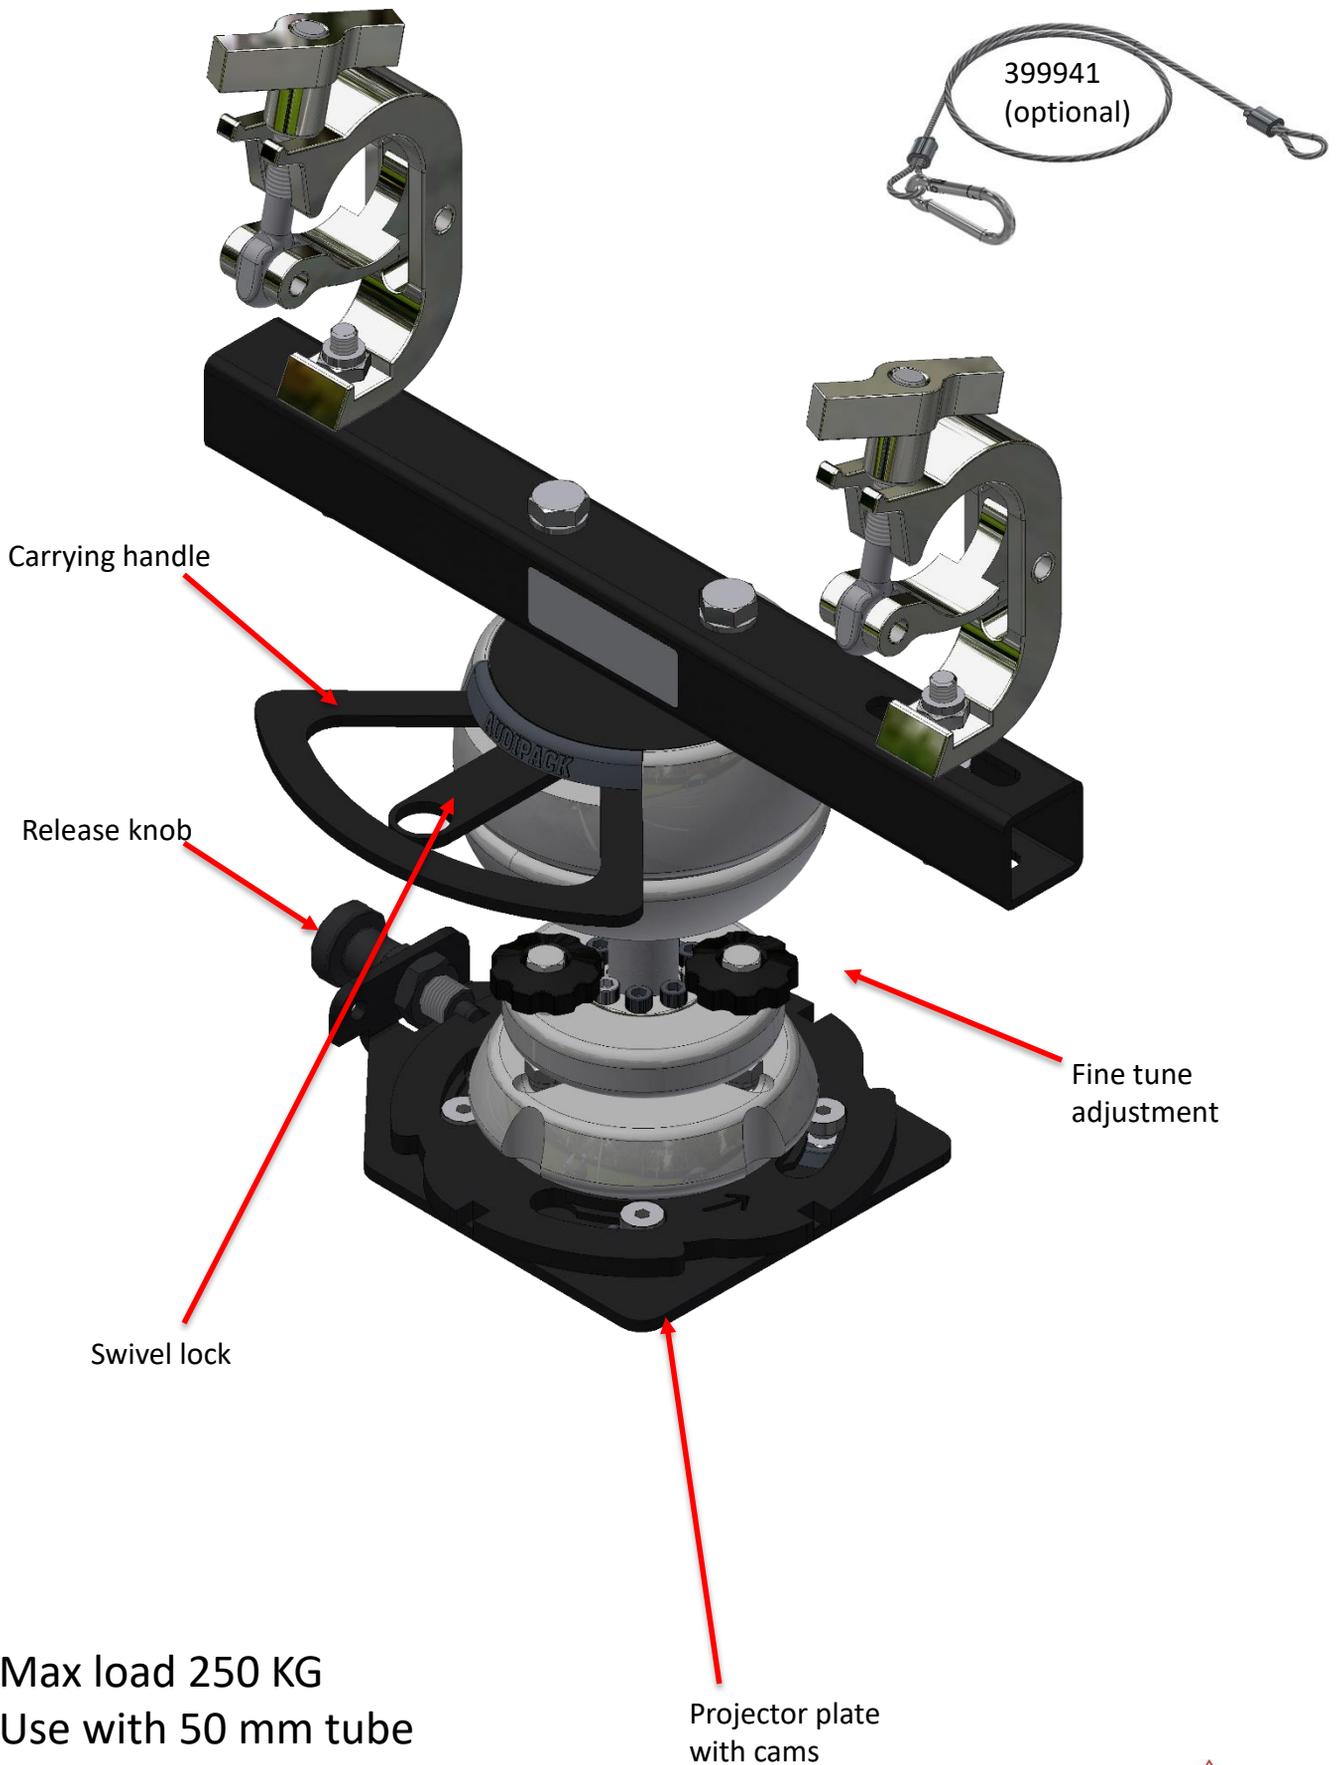

Max load 250 KG  
Use with 50 mm tube  
Always secure with safety cable

# TRUSS ball-joint BJ-PRO

Setting the clamp force.

1. Undo the top plate of the ball joint
2. Peel out the plastic part
3. Reset the grip handle by repositioning the grip on the hex bolt head.

