

Table stands and mounts

for Flat panels

The Audipack flat panel table stands,

highly flexible solutions for screens up to 50"



Audipack®

It's great to have solutions...

Free standing and low profile solution



The universal flat panel table stand is a solid, low profile, and freestanding presentation solution for flat panels up to 50 inch diagonal.


The discreet design of the product compliments any flat panel perfectly. These stands come equipped with the Lock&Secure mounting system.

To install your flat panel to an Audipack product, an additional flat panel bracket is needed.

- ▲ **Easy installation**
- ▲ **Discreet design**
- ▲ **2 height positions**
- ▲ **Rigid construction**
- ▲ **Vertical height adjustment**



The L&S 3 interface fits all Audipack mounting brackets

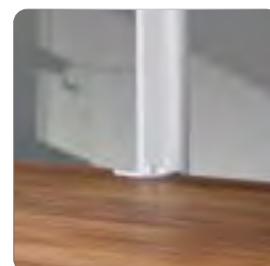

Easy mounting solution

TABLE STANDS AND MOUNTS



Ref.	390660
Dimensions in mm	W 490 x D 265 x H 539
Mounting interface	L&S 3
Max. screen height	ca. 700 mm (VESA in center)



Ref.	392551
Dimensions in mm	W 490 x D 265 x H 590
Mounting interface	L&S 3
Max. screen height	ca. 800 mm (VESA in center)



Ref.	DMV1-0500
Length in mm	500
Mounting interface	VESA 75 x 100



Video wall and Multi screen solutions

Create a video wall in any configuration...

The Audipack video wall mounting system is the most solid and adjustable system on the market.

Save time and money on the installation.



Audipack[®]

It's great to have solutions...

Create a **video wall** in any configuration

in next to **no time!**



Less effort for screen alignment perfection

Installing video walls with Audipack's installation systems saves time and money.

Audipack offers two systems:

VWM Basic system

The universal **VWM basic system** is a low cost, high value installation system that gives fast and precise installation.

The construction looks simple, but there is more than meets the eye. Each screen is separately adjustable when it is installed to the wall or rental flying frame.


The system copes easily with 2x2, 4x4 or even 8x4 configurations. With a simple addition of our screen installation cams, the screens are installed in an instant.

VWMS Serviceable system

The **VWMS serviceable system** is an impressive product that supports the installation of multiple screens on a wall whilst allowing individual screen access for servicing needs.

Each screen in the videowall can be pushed out from the wall, with the Push-to-Release system for service or repair. Simply push the screen back in when complete. The built-in adjustment feature means perfect alignment, even on a non-level wall.

The system copes easily with 2x2, 4x4 or even larger configurations. With a simple addition of our screen installation cams, the screens are installed in an instant.

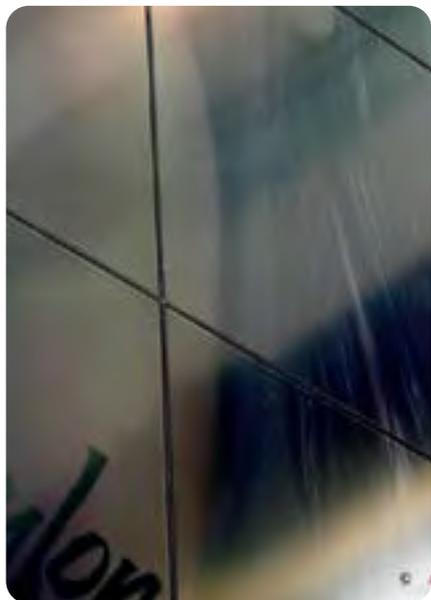


BACK PLATES (BASIC SYSTEM)



Ref.	VWM-BPH-0800
Length in mm	800
Ref.	VWM-BPH-1000
Length in mm	1000

MOUNTING ARMS (BASIS SYSTEM)

Screen sizes constantly change, visit our website for updated models and screen sizes

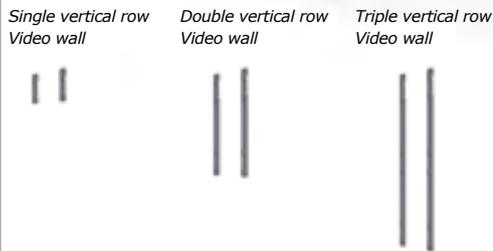

* For screens with non-centric placed VESA pattern

Max. ° 46	Ref.	MA-400	MA-2-46AS *	MA-3-46AS *
	Max. screen size Vertical VESA	300, 400	H 576-593 400	H 576-593 400

Max. ° 46	Ref.	MA-400	MA-2-46-V3	MA-3-46-V3
	Max. screen size Vertical VESA	300, 400	H 578-608 300	H 578-608 300

Max. ° 55	Ref.	MA-400	MA-2-55	MA-3-55
	Max. screen size Vertical VESA	300, 400	H 684-714 400	H 684-714 400

Max. ° 60	Ref.	MA-400	MA-2-60	MA-3-60
	Max. screen size Vertical VESA	300, 400	H 754-784 200	H 754-784 200

Max. ° 46	Portrait		Ref.	MA-600	MA-2-46P
			Max. screen size Vertical VESA	400, 600	H 1023-1084 200, 400, 600

Max. ° 55	Portrait		Ref.	MA-600	MA-2-55P
			Max. screen size Vertical VESA	400, 600	H 1215-1275 200, 400, 600



Upper screen position and complete row height adjustment




Lower screen position & offset adjustment

VIDEO WALL SYSTEMS

VIDEO WALL PUSH TO RELEASE SYSTEM VOOR EASY SERVICE

Mounting head

Manually accessible, with Push to Release system

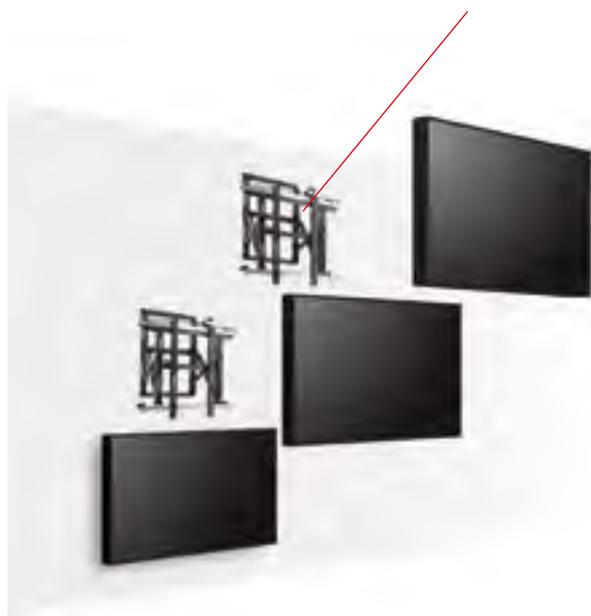

- ▲ Short installation time due to "row installing"
- ▲ Push-to-Release system for easy flat panel access
- ▲ Compact offset dimensions (only) 80 mm
- ▲ Post-installation fine tuning of height and leveling for a seamless installation
- ▲ Standard multi-axis adjustable interface, extendable up to VESA 600 x 400



A perfect aligned videowall, installed in a perfect time and all screens are serviceable. Those are the key elements of the VWMS videowall system. A system that installs with low effort featuring lots of alignment options in 6 axes, even when the wall is not finished well or is not perfectly level. The build-in 3D adjustment features deals with it all. Simply install the mounting heads with the use of the special installation ruler to the wall, mount the two brackets to the flat panel and hang the display on the mounting head. Align the display with the adjustment features.

PUSH TO RELEASE SYSTEM FOR EASY SERVICE

**Ref.****VWM-MH3**


Dimensions in mm	W 560 x D 88 x H 550		
Wall offset in mm	88		
Nett weight	12 kg	Max. "	Max. "
Linear service travel in mm	290	60	50
Mounting interface	VESA 400		
Optional	VESA 600 x 400, 800 x 400 (MH3-EV800)		

- Post-installation fine tuning of height and leveling for a seamless installation;
- Post-installation lateral shift to easily slide screens apart or together for easy; maintenance and perfect alignment;
- Audible click when the screen safely engages with the mount;
- Fine-tuning adjustment in **6 axes** to ensure screens are perfectly vertical for a seamless install, to compensate for walls that are not perfectly flat;
- Push to Release for service access.

Ref.**VWM-MH4**

Dimensions in mm	W 560 x D 88 x H 550		
Wall offset in mm	88		
Nett weight	12 kg	Max. "	Max. "
Linear service travel in mm	290	60	50
Mounting interface	VESA 400		
Optional	VESA 600 x 400, 800 x 400 (MH3-EV800)		

- Never touch the screen. The VWM-MH4 **electric activated mounting head** is suitable for direct wall mounting. With the "electric release" mechanism the screen pops out of the videowall.
- The P7520 control unit, allows you to select and release, between multiple screens
- Post-installation fine tuning of height and leveling for a seamless installation;
- Post-installation lateral shift to easily slide screens apart or together for easy; maintenance and perfect alignment;
- Fine-tuning adjustment in **6 axes** to ensure screens are perfectly vertical for a seamless install, to compensate for walls that are not perfectly flat.

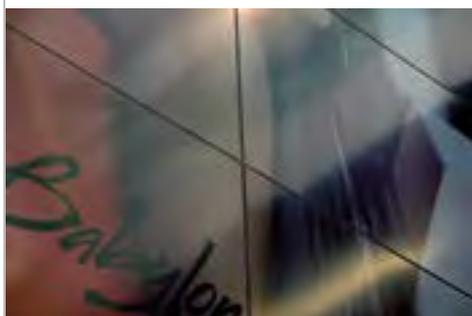

Perfect corner to corner
screen adjustment

ACCESSORIES

CONTROL UNIT FOR SELECTING AND ACTIVATING THE VWM-MH4

Ref.	P7520
Power supply:	24 volt
Channels:	16 (4x4 videowall or smaller) Unit can be installed away from the videowall



UPGRADE SET FOR VWM-MH3 TO VWM-MH4

Ref.	P7521
Allows you to upgrade a VWM-MH3 to a VWM-MH4. The P7520 control unit is required for selecting and activating your VWM-MH4 unit.	

MOUNTING CAMS FOR MOUNTING ON BASIC SYSTEM



MOUNTING CAMS (RECESSED HOLES)



Ref.	392618 M6 x 13	392318 M8 x 13	390618 M10 x 13	392621 M6 x 35	392620 M8 x 35
-------------	--------------------------	--------------------------	---------------------------	--------------------------	--------------------------

MOUNTING SET FOR VWM-MH3

Conversion set from VESA 400 to 600, 800.
Adds 15 mm extra wall offset (from 88 to 103 mm)



Ref	MH3-EV800
------------	------------------

AUDIO SOLUTIONS



For every flat panel a made to measure soundbar is available. See chapter "Audio solutions" page 3 for more information

Wall mount solutions

for flat panels

The Audipack wall mounts,

are a range of products that offer perfect solutions for Pro AV use or permanent installations.



Flexible, strong and Innovative!



The **Professional temporarily AV wall mounts** are specifically designed for professional installations. The special Lock&Secure mounting interfaces guarantees a quick installation and panel switch if required. Especially suitable for projects, public places, convention centres etc. To install your flat panel to an Audipack ProAV wall mount an additional flat panel bracket is needed.

- ▲ **Fast and easy installation**
- ▲ **Quick flat panel installation and removal**
- ▲ **Theft delay**
- ▲ **Very rigid design**



Screw cup detail®



Flexible mounting range

The strongest and most innovative solutions for wall mounting screens

The Audipack **wall mounts** are specifically designed for quick and safe installations; see them as temporarily rental applications, or for permanent installations. Key benefits include durability, speed of installation and easy product access.


The **Universal wall mounts** offer a wide range for the safe and fast installation of flat panels. Durable, flexible and adjustable they offer the perfect solution for every screen. With the special build-in "align feature" drill mistakes can be solved easily.



(registered product)

A wide range of VESA and universal mounts is available. All our flat panels wall mounts are safe and easy to install and are available for flat panels up to 120 inch diagonal.

The professional wall mounts on the next pages are combined with L&S3 or L&S5 monitor brackets.

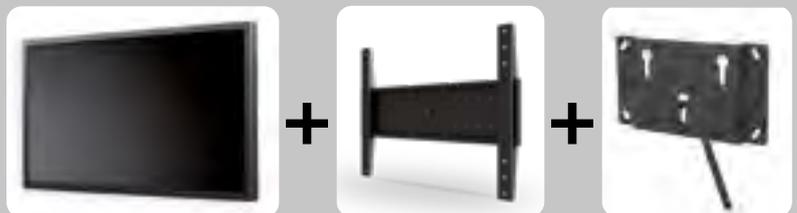

WALL MOUNTS

PERMANENT INSTALLATION - MULTI VESA

	Ref. 390838 Dimensions in mm W 120 x D 22 x H 122 VESA 75 & 100	Max. ° 20 Max. 10	
	Ref. 390839 Dimensions in mm W 120 x D 22 x H 162 VESA 75 & 100 Tilt adjustment in degrees +5	 Max. ° 20 Max. 10	
	Ref. 390840 Dimensions in mm W 269 x D 28 x H 250 VESA 75, 100 & 200	Max. ° 55 Max. 50	
	Ref. FWM-V402 Dimensions in mm W 460 x D 21 x H 530 Max. mounting range in mm W 400 Positioning Landscape and portrait	Max. 30 ALIGN	
	Ref. FWM-V600 Dimensions in mm W 660 x D 21 x H 500 Max. mounting range in mm W 600 Positioning Landscape and portrait	Max. 50 ALIGN	

PERMANENT INSTALLATION - MULTI VESA

 <i>For Ultra thin LED screens</i>	Ref. FWM-V400 Dimensions in mm W 460 x D 12 x H 520 VESA width 200, 300 & 400 VESA height 200, 300 & 400 <i>Including flat panel installation materials</i>	Max. 50	
	Ref. FWM-V900 Dimensions in mm W 1004 x D 30 x H 966 Max. mounting range in mm W 900 x H 600 <i>Please refer to www.audipack.com for brand related large screen wall mounts</i>	ALIGN Max. 50	

TILTABLE WALL MOUNT WITH EQUIPMENT CABINET BEHIND SCREEN

Inclusive Align® installation feature

	Ref. FWM-V400EC Dimensions W 605 x D 85 x H 480 mm Max. range mounting points W 470 x H 460 mm Tilt adjustment in degrees -15 / 0 / +15 Equipment cabinet behind screen	Max. 50  Max. ° 75	
---	---	--	---

PERMANENT INSTALLATION - PULL TO RELEASE - UNIVERSAL

	Ref. FWM-V8SV Max. mounting range in mm W (free adjustable) x H 825 x Depth in mm flat 109, extended 320 The FWM-V8SV is a heavy duty wall mount for large flat screens. By pulling the cords, the wall mount is released and comes forward to give access for service. A perfect solution to be applied for a wall recess.	Max. 185 
---	--	---

WALL MOUNTS TEMPORARY INSTALLATION & RENTAL

WALL MOUNTS

L&S 5 MOUNT



Ref. 390967
 Dimensions in mm W 340 x D 18 x H 286
 Mounting interface L&S 5

TILTABLE L&S 5 MOUNT



Ref. 390657
 Dimensions in mm W 359 x D 41 x H 320
 Mounting interface L&S 5
 Tilt adjustment -10° / 0° / +10°
 Optional lock numeric:230052

PERMANENT INSTALLATION - UNIVERSAL



Ref.	392696	392698
Dimensions in mm	W 1550 x D 50 x H 800	W 1550 x D 50 x H 1290
Max. mounting range connected	W 1495 x H 740	W 1495 x H 1290
Max. mounting range open	W 2000 x H 740	W 3000 x H 1290



Ref. 392585
 Dimensions in mm approx. 2 x W 139 x D 44 x H 830
 Max. mounting range in mm W 1500 x H 800



Heavy duty wall mount, easy to install.



Ref. FWM-2688
 Dimensions in mm W 540 x D 60 x H 380
 Max. mounting range in mm W 470 x H 360
 Min. mounting range in mm W 80
 Tilt adjustment in degrees -10° / 0 / +10°



Lock the bracket with the optional lock
Ref.: 230052(numeric)



Ref. FWM-2690
 Dimensions in mm W 740 x D 60 x H 500
 Max. mounting range in mm W 670 x H 446
 Min. mounting range in mm W 227,5
 Tilt adjustment in degrees -10° / 0 / +10°



Lock the bracket with the optional lock
Ref.: 230052(numeric)



Ref. FWM-688
 Dimensions in mm W 530 x D 28 x H 400
 Max. mounting range in mm W 470 x H 360
 Min. mounting range in mm W 88



Ref. FWM-690
 Dimensions in mm W 728 x D 28 x H 500
 Max. mounting range in mm W 670 x H 446
 Min. mounting range in mm W 174



Lock the bracket with the optional lock
Ref.: 230052(numeric)



Ref. FWM-688P
 Dimensions in mm W 530 x D 28 x H 650
 Max. mounting range in mm W 470 x H 600
 Min. mounting range in mm W 88



Ref. FWM-690P
 Dimensions in mm W 730 x D 28 x H 650
 Max. mounting range in mm W 670 x H 600
 Min. mounting range in mm W 174



SCREEN-CRAWLER (INSTALLATION AID)



Ref. SC-190

Max load 200 kg
 Height (retracted) 1990 mm
 Max. lift height (hook) 2900 mm



Optional: **P7551**, lifting aid with eyebolts for lifting loads with bands or chains (bands and chains not supplied) more info on our website.

- ▲ **Complies with NEN-EN-ISO 12100:2010NL**
- ▲ **Yearly check-up required**

The screen-crawler makes it possible to safely lift large screens with a minimum of effort and less installers. You simply attach the screen with hoisting cables/bands to the hoist aid and you hoist up the screen with the hinch.

Wall arms

for flat panels

Audipack flat panel swivelling wall arms;

a world standard in stability and ease of use.



Relax and enjoy the flexibility

Enjoy your flat panel from anywhere in the room.

Face the screen towards your kitchen, child's play area or your guests. The clean lines of the design negate the need for complex supports.

These extremely stable wall arms allow the flat panel to be set in any position. Their minimalistic looks and neat dimensions ensure the attention is focused on the screen rather than the wall arm. All cables are hidden in the arm itself, so unsightly wiring is out of sight.

Use the **Screen-Crawler** (SC-190) Installation Aid for safe installation of large, heavy screens. (See page 63)



- ▲ **Rigid and safe construction**
- ▲ **Lockable in every position**
- ▲ **Very flexible in use**
- ▲ **Integrated cable duct in swing arms and wall plate**



All cables out of sight through the arm



Lockable in position



L&S 3 mounting interface

WALL ARMS

WALL ARMS ALL-IN-ONE PROJECT SOLUTION - UNIVERSAL

- ▲ **Swiveling wall arm, left/right orientation**
- ▲ **Universal mounting interface**
- ▲ **Integrated space for cables and equipment**

These wall arms have an integrated space for media player/pc and 3-way power strip (type F, CEE 7/4).



Ref.	FWA-500	FWA-700
Max. wall offset in mm	500	700
Mounting range	W 690 x H 446	W 690 x H 446
Mounting interface	Universal	Universal



Black version



Rear view



Integrated space for media player



Ref.	FWA-500i	FWA-700i
Max. wall offset in mm	500	700
Mounting range	W 690 x H 446	W 690 x H 446
Inclination angle	-10 / 0 / +10°	-10 / 0 / +10°
Mounting interface	Universal	Universal



WALL ARMS WITH L&S 3 + VESA



Ref.	390614
Dimensions in mm	W 801 x D 88 x H 310
Max. wall offset in mm	700
Nett weight	14 Kg
Mounting interface	VESA 75, 100 & 200 x 100



DOUBLE SWIVELLING WALL ARM WITH L&S 3 + VESA



Ref.	390695
Dimensions in mm	W 650 x D 115 x H 483
Max. wall offset in mm	1087
Nett weight	23 Kg
Mounting interface	VESA 75, 100 & 200 x 100



FLAT PANEL SWIVELING WALL ARM UP TO 120 KG



Ref.	FWA-120
Dimensions in mm	W 650 x D 115 x H 483
Max. wall offset in mm	1050
Nett weight	23 Kg
Max load	120 kg
Max screen size	aprox 120 inch
Mounting interface	L&S 5 for UFPRO mounts (be aware of load limit of brackets 80 kg) 170x170 M8/M10 brackets for large screens, load up to 120 kg



ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 112 FOR THE FULL PROGRAM)



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

Ceiling mounts

for flat panels

With flat panels becoming an increasingly important element of any professional install,

the installation speed, adjustability and stability of the accessories are important features.

Audipack introduces the new generation of ceiling mounts for flat panels.



Stylish and Professional!

Audipack's flat panel ceiling mounts are durable mounting solutions that allow height and angle adjustment of the flat panel.

The flat panel ceiling mounts are slim, discreet and suitable for any brand and type of panel. This product line enables quick installation and complements any installation. Flexible screen adjustment and neatly hidden cables within the tubes are standard features.

Fixed lengths and telescopic versions are available to position the screen perfectly for every height and location.

The colour of the mounting head is standard black RAL 9005

- **The CMV1 and CMV2 series** feature a new special ball-joint to easily direct and adjust the screen towards the viewer. This product line offers standard VESA 75, 100 and 200 mounting patterns.
- **The FCM and FCMD series** are durable and rigid product lines that offer flexibility for installing *larger single* or *back-to-back* screens. Perfect for pro AV installation projects.

With the standard available options it is very easy to adapt the ceiling mounts to meet your installation specifications.

The 800 series flat panel ceiling mounts are designed for installations with large screens installed onto high ceilings. The product stability allows a slim but long ceiling mount, hiding all cables and offering a continuous height adjustable mounting head with forward inclination.

With the Audipack Lock&Secure system the flat panel is easily mounted and quickly secured. Custom-made models are available in lengths up to 4 metres.

- ▲ **Telescopic models available**
- ▲ **Perfectly angle adjustment**
- ▲ **VESA and L&S 5 suited**
- ▲ **All cables hide through the tube**
- ▲ **VESA and L&S 5 in black**



Angle adjustment



Neatly installed cables




20° adjustment and
standard lockable



Standard ceiling finishing on
all models

CEILING MOUNTS

CMV1 SERIES: CEILING MOUNTS WITH VESA 75 & 100**Ref. CMV1-0300**

Length in mm	300
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV1-0500**

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV1-0800**

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV1-1000T**

Length in mm	604-1000 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°

**CMV2 SERIES: CEILING MOUNTS WITH VESA 100 & 200****Ref. CMV2-0500**

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV2-0800**

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV2-1500T**

Length in mm	907-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°

**CMV4 SERIES: CEILING MOUNTS WITH VESA 200, 300 & 400****Ref. CMV4-0500**

Length in mm	500
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV4-0800**

Length in mm	800
Tube diameter in mm	54
Tilt adjustment in degrees	0-27°

**Ref. CMV4-1500T**

Length in mm	907-1500 (Telescopic)
Tube diameter in mm	54-60
Tilt adjustment in degrees	0-27°



FCM SERIES: CEILING MOUNTS WITH L&S 5



5 point mounting system
Bracket is required for screen mounting (page 47)



Ref.	FCM-1000		
Length in mm	1000		
Tube diameter in mm	54		
Tilt adjustment in degrees	0-20°		
Ref.	FCM-1500		
Length in mm	1500		
Tilt adjustment in degrees	0-20°		
Ref.	FCM-1500T		
Length in mm	909-1500 (Telescopic)		
Tilt adjustment in degrees	0-20°		

FCMD SERIES: BACK TO BACK SOLUTIONS



5 point mounting system
Bracket is required for screen mounting (page 47)



Ref.	FCMD-1000		
Length in mm	1000		
Tube diameter in mm	54		
Tilt adjustment in degrees	0-20°		
Ref.	FCMD-1500		
Length in mm	1500		
Tilt adjustment in degrees	0-20°		
Ref.	FCMD-1500T		
Length in mm	909-1500 (Telescopic)		
Tilt adjustment in degrees	0-20°		

800 SERIES CEILING MOUNTS L&S 5




Ref.	FCM-800-1000		
Length in mm	1000		
Tilt adjustment in degrees	0-15°		
Optional lock	Numeric:230052		
Optional ceiling finishing ring	CFR-800		
<p>5 point mounting system Bracket is required for screen mounting</p>			
Ref.	FCM-800-XXXX CUSTOM-HEIGHT		
Length in mm	Custom, tot max. 3000 mm		
Tilt adjustment in degrees	0-15°		
Optional lock	Numeric:230052		
Optional ceiling finishing ring	CFR-800		
<p>5 point mounting system Bracket is required for screen mounting</p>			

CEILING MOUNTS


SQUARE CEILING MOUNT



Ref.	FCM4-4655
Tilt adjustment	15 degrees downwards
Mounting interface	Universal
Standard colour	Black RAL 9005
Ceiling mount pole	1000 - 1500 mm (centre screen)



Ref.	FCM4-6075
Tilt adjustment	15 degrees downwards
Mounting interface	Universal
Standard colour	Black RAL 9005
Ceiling mount pole	1000 - 1500 mm (centre screen)



The FCM4 square ceiling mount is sturdy and easy to install. It supports four large flats screens. The FCM4 comes with a bracket to attach the tube to the ceiling. The FCM4-tube can be custom made in any size up to 3000 mm. The FCM4 is available for screen sizes up to 90".

Order reference: **FCM4- XX(screen size)**

Tubes set and length custom available.

ACCESSORIES

MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 112 FOR THE FULL PROGRAM)



Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFFRO series



Brand related mounts



VESA mounts

EQUIPMENT CABINET



Ref.
Max. equipment dimensions in mm

For above ceiling installation
Use with FCM, FCMD, CMV1, CMV2, CMV4




EC-5
W 350 x D 350 x H 100

CEILING MOUNTS

CEILING MOUNTS

EXTENSION TUBES



Diameter 54 mm.



Ref.	ET-1000	ET-1500	ET-2000	ET-2500
Length in mm	1000	1500	2000	2500
Length gain in mm	940	1440	1940	2440

TRUSS MOUNTS (Ø 50 MM TRUSS)



Ref.	TM-54	TM-54-200	TM-60
Suitable for	54 mm tubes	Telescopic FCM-1500T, FCMD-1500T	(Telescopic tube sets only) 60 mm tubes

Ceiling to floor solutions

for flat panels

The Audipack ceiling to floor solutions

A free standing and solid solution in any environment





Create a free standing

solution...

The ceiling to floor (CTF) and floor to wall (FTW) products are the ideal solutions for installing flat panels in a free standing position in a room or when a wall is too weak constructed to hold a rather large (touch) screen. The CTF and FTW products are manufactured from modern designed aluminium profiles with an integrated cable duct. For each application a choice, that's why Audipack offers 3 different contour shaped profiles.

Your choices:

The 700 series is the slimmest model which can be used in a single and double version. With its detachable cable duct covers it offers a slim but strong presentation solution.



700 series

The 800 series is a mid-size profile with 2 cable ducts and suitable for mid to large sized LED screens. The screens can be installed along the length of the column.



800 series

The 900 series is the most rigid and strong column. It's strong enough to hold the heaviest screens and rigid enough to handle the longest lengths. With its large internal cable duct the best solution for multiple screen installations like videowalls.




900 series

**The ceiling to floor solutions can be made in any length.
A perfect solution for any situation...**

Order explanation:

CTF-700D-3000

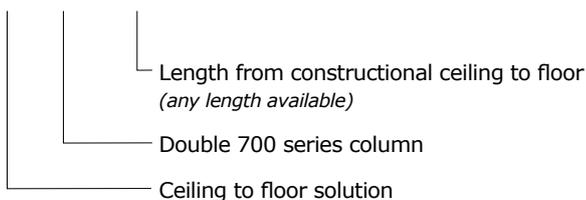

- ▲ **A free standing solution**
- ▲ **Rigid and flexible construction**
- ▲ **Single or multi-screen mounting**
- ▲ **Integrated cable duct all columns**

Choose your interface.

The FS series is available with 2 different screen interfaces. The L&S 5 is the Audipack's AV cross rental solution with a wide variety of installation options on the job. The Multi-Vesa solution is a very cost effective mounting interface based on the Vesa mounting pattern on the screen. With mounting cams the screen can easily be locked in the mounting head.



Mounting interface: L&S 5



Multi functional mounting interface:
Multi-Vesa 400x400, 600x400, L&S 3, L&S 5

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

CEILING TO FLOOR SOLUTIONS

CEILING TO FLOOR SINGLE 700

**Ref. CTF-700**

Standard length	2700 mm (max. 5000 mm)
Column size	60 x 110 mm
Max. load (approx)	1 x 50, 2 x 40, 3 x 30 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	2 removable covers

Bracket is required for screen mounting

CEILING TO FLOOR DOUBLE 700

**Ref. CTF-700D**

Standard length	2700 mm (max. 5000 mm)
Column size	2 x 60 x 110 mm
Max. load (approx)	1 x 60, 2 x 50, 3 x 30 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	4 removable covers

Bracket is required for screen mounting

CEILING TO FLOOR SOLUTIONS

FLOOR TO WALL SINGLE 700

**Ref. FTW-700**

Standard length	2000 mm (max. 5000 mm)
Column size	60 x 110 mm
Max. load (approx)	1 x 50, 2 x 40, 3 x 30 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	2 removable covers

Bracket is required for screen mounting

CEILING TO FLOOR SINGLE 800

**Ref. CTF-800**

Standard length	2700 mm (max. 5000 mm)
Column size	125 x 60 mm
Max. load	85 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	hinged door


Bracket is required for screen mounting

CEILING TO FLOOR SINGLE 900

**Ref. CTF-900**

Standard length	2700 mm (max. 5000 mm)
Column size	183 x 91 mm
Max. load	2 x 85 Kg
Mounting interface	L&S5 - Multi-Vesa
Cable duct	hinged door

Bracket is required for screen mounting

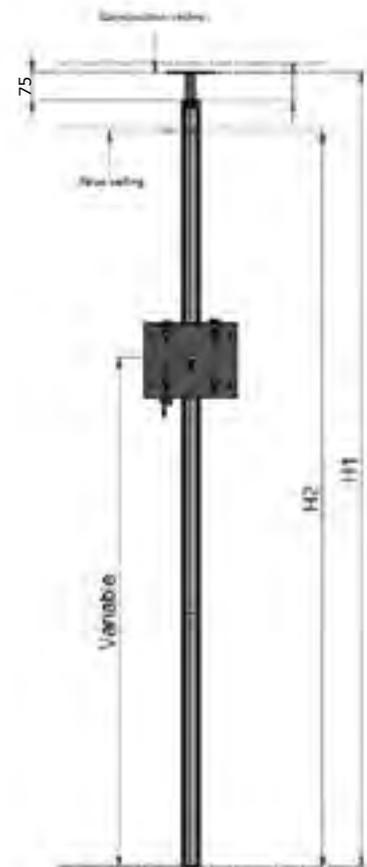

For ordering custom length CTF, please provide dimensions H1 and H2

Ceiling to Floor with integrated Audio



Permanent presentation solution with integrated audio.

The CTF-Atlas is a unique ceiling to floor solution for your flat panel up to 65 inch.

The secret of this presentation solution is the integrated audio feature of 2 x 30 Watt in the vertical column.

A LED screen can be installed via the L&S5 mounting interface and with an equipment holder EC-1 or EC-1WLD (optional) a Mac mini, mini PC or Barco Click- Share mini can be applied.

The CTF- ATLAS has a standard length that can be shortened if needed. Other lengths can be ordered custom-made to fit the specific ceiling height.

- ▲ Easy equipment installation
- ▲ Portrait or landscape flat panel positioning
- ▲ Integrated passive audio



Built-in speakers

CEILING TO FLOOR SOLUTION AUDIO



Ref.	CTF-ATLAS
Dimensions in mm	W 147 x D 143 x H 2700*
Suitable for ceiling height in mm	H 2716 - 2830
Presentation height in mm	1600-1900 (centre screen)
Mounting interface	L&S 5
Colour	Anodized Aluminium / black speaker front
Max power	2 x 30 Watt at 8 Ohm
Frequency	70 Hz - 20 KHz

Max. "	Max. "
65	30

*Custom lengths can be ordered to fit the specific ceiling height.



Ref.	CTF-ATLAS-XL
Dimensions in mm	W 955 x D 145 x H 2708*
Suitable for ceiling height in mm	H 2716 - 2830
Presentation height in mm	1800-2000 (centre screen)
Mounting interface	L&S 3 & 5, VESA 600 x 500/400, 400 x 500/400
Colour	Anodized Aluminium / black speaker front
Max power	2 x 30 Watt at 8 Ohm
Frequency	70 Hz - 20 KHz

Max. "	Max. "
100	85

*Custom lengths can be ordered to fit the specific ceiling height.

CEILING TO FLOOR SOLUTIONS

ACCESSORIES**MOUNTING BRACKETS FOR FLAT PANELS (SEE PAGE 112 FOR THE FULL PROGRAM)**

Mount any brand and type of flat panel on any Audipack system with the Audipack mounting brackets.



UFPRO series



Brand related mounts



VESA mounts

AUDIO SOLUTIONS

Interface for Soundbar
Ref.



700 series single
LSH-FS700



700 series double
LSH-FS700D

800 series
LSH-FS800

900 series
LSH-FS900

*For every flat panel a made to measure soundbar is available.
See chapter "Audio solutions" page 3 for more information*

EQUIPMENT HOUSINGS

Housing for Mac Mini,
universal media player,
Barco clickshare mini

Mounting interface:
L&S 5



Ref.
Max. dimensions equipment in mm

EC-1WLD (Type F, CEE 7/4, Wieland connection)
H 200 x B 200 x D 48

STEREO MINI AMPLIFIER

For:
LSS-UFO
LSS Soundbar
LSS Profile



Ref. 491026
Max. power 2 x 20 watts @ 8 Ohm

Column mounts

for flat panels

The Audipack column mounts for flat panels

are the most flexible solution for mounting onto pillars or columns




COLUMN MOUNTS

Stylish and Professional!



Order explanation:

FKM-0400B

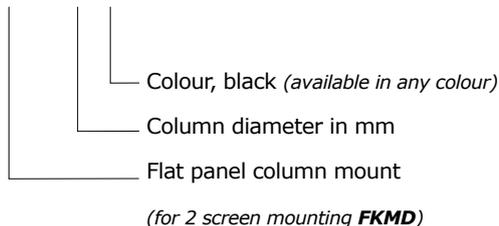

Audipack column mounts are ideal for installing flat panels onto round or square columns.

The metal clamp gives a flexible and secure method of mounting that does not undermine the column's strength. All Audipack Lock&Secure mounts can be used in conjunction with this product.

These mounts are custom made to the client's order. They are available in difference diameters for single or multiple flat panel installation.


A slim and solid solution for all situations. No drilling needed.

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

See "Mounting brackets for flat panels" section on page 47 for an overview of the available brackets.

Check www.audipack.com for an updated product range

- ▲ **Does not affect constructional column strength**
- ▲ **Clamping installation**
- ▲ **Custom made for any situation**
- ▲ **Standard colour black RAL 9005**

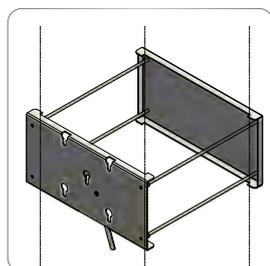

Available for multiple screen mounting



Available for multiple screen mounting

STANDARD COLUMN MOUNTS



Standard column mount
FKM-2050 & FKM-5080

Ref.	FKM-2050
Mounting interface	Adjustable clamp with L&S5 mount
Max. load	60 Kg
Colour	Black RAL 9005, stainless steel clamp
Column diameter	200-500 mm

Ref.	FKM-5080
Mounting interface	Adjustable clamp with L&S5 mount
Max. load	60 Kg
Colour	Black RAL 9005, stainless steel clamp
Column diameter	500-800 mm

Truss mounts

for flat panels

The Audipack truss mounts for flat panels are

a sturdy solution for mounting flat panels to truss constructions.



Audipack®

It's great to have solutions...

TRUSS MOUNTS

Install flat panels to a **truss** **safely** and **quickly**

There is no easier way to mount flat panels to a truss than with one of the Audipack truss mounting solutions.

Audipack offers a range of flexible products that feature safety and speed as key elements. The low risk way to mount the flat panels with the minimal use of tools and external materials.

A fixed mount is available which is directly mounted to the truss. This product line is available with varying lengths of tubes for total flexibility.

To install your flat panel to an Audipack product an additional flat panel bracket is needed.

Stainless steel security cable: **399941**



800 SERIES TRUSS MOUNTS L&S 5



Ref.	FTC-800-XXXXB
Length in mm	custom
Truss diameter in mm	50
Tilt adjustment in degrees	0-15°
Rotation truss mount in degrees	-30-30°
Mounting interface	L&S 5
Optional	numeric lock Ref.: 230052



TRUSS TUBE SETS




Ref.	FTC-1500T
Length in mm	909-1500
Truss diameter in mm	50
Tilt adjustment in degrees	0-20°



Ref.	FTCD-1500T
Length in mm	909-1500
Truss diameter in mm	50
Tilt adjustment in degrees	0-20°



DIRECT TRUSS MOUNT

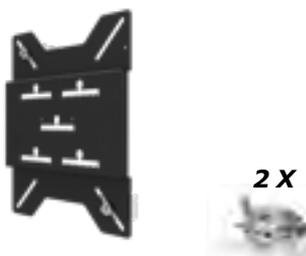

Ref.	390694
Dimensions in mm excl. clamps	W 450 x D 30 x H 450
Suitable for truss width in mm	250 - 300
Truss diameter in mm	50

