


Freestyle Flat Panel Rotation Adapter **SKU: FRA**

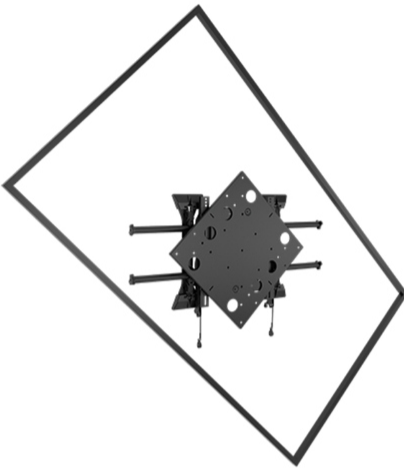

The Freestyle Rotation Adapter allows designers to generate an extremely wide variety of video display wall configurations using either ConnexSys™ or Fusion® mounts.

FRA shown in picture with Fusion® mount.

Note: Please see the selection guide in the Resources tab to ensure visual coverage of mount at all angles.

Mounting pattern can be 600 x 400 if using FHB5036 for M6 screws or FHB5037 for M8 screws.

- Positive lockouts at 15 degree increments
- Provides 90 degrees of rotation for 360 degrees of range
- Overlapping displays (with Fusion® FCADA) adds another level of customization and creativity
- Micro-adjustment (with ConnexSys™)
- Weight capacity when used with ConnexSys™: 125 lbs (56.7 kg)
- Weight capacity when used with STMS1U, MTMS1U: 55 lbs (24.95 kg)
- Use with Fusion® wall, ceiling and freestanding mounts
- Positive lockouts at 15 degree increments
- Typical Screen Size: Greater than 40" (1016mm) using MTMS1U or STMS1U: 19" minimum display height at 45°. Greater than 55" using ConnexSys: 27" minimum display height at 45°

Specifications

Dimensions &

Measurements

Depth	2.13 cm (0.8 in)
Height	43.82 cm (17.3 in)
Minimum Depth	2.13 cm (0.8 in)
Overall Dimensions	17.25 x 17.25 x 0.84" (438 x 438 x 21 mm)
Shipping Weight	7.71 kg (17 lbs)
Weight Capacity	With MTMS1U, STMS1U 55 lbs (24.95 kg): With ConnexSys 125 lbs (56.7 kg)
Width	43.82 cm (17.3 in)

Characteristics &

Features

Application	<ul style="list-style-type: none">• Ceiling• Floor-Cart• Wall
Color	Black
Orientation	<ul style="list-style-type: none">• Landscape• Portrait
Solution Type	Universal
TAA Compliant	No
UPC	841872169910

Source: <https://www.legrandav.com/products/accessories/display-tv-accessories/freestyle-rotation-adapter/fra>