



THE DISPLAY CHOICE
OF PROFESSIONALS™

LW-2202 & LW-2402 LCD Monitor

User Manual

www.agneovo.com



TABLE OF CONTENTS

SAFETY INFORMATION

Federal Communications Commission (FCC) Notice (U.S. Only)	3
WEEE	4

PRECAUTIONS

Notice	5
Cautions When Setting Up	6
Cautions When Using	6
Cleaning and Maintenance	7
Notice for the LCD Display	7

CHAPTER 1: PRODUCT DESCRIPTION

1.1 Package Contents	8
1.2 Installation	9
1.2.1 Installing the Stand	9
1.2.2 Adjusting the Tilt	10
1.2.3 Wall Mounting	10
1.3 Overview	11
1.3.1 Front View	11
1.3.2 Control Buttons	11
1.3.3 Rear View	12

CHAPTER 2: MAKING CONNECTIONS

2.1 Connecting the DC Power	13
2.2 Connecting Input Source Signals	14

CHAPTER 3: ON SCREEN DISPLAY MENU

3.1 OSD Menu Tree	15
-------------------------	----

CHAPTER 4: APPENDIX

4.1 Warning Messages	18
4.2 Troubleshooting	19
4.3 Transporting the LCD Display	20

CHAPTER 5: SPECIFICATIONS

4.1 Display Specifications	22
4.2 Display Dimensions	23

SAFETY INFORMATION

Federal Communications Commission (FCC) Notice (U.S. Only)



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Use only an RF shielded cable that was supplied with the display when connecting this display to a computer device.

To prevent damage which may result in fire or shock hazard, do not expose this appliance to rain or excessive moisture.

THIS CLASS B DIGITAL APPARATUS MEETS ALL REQUIREMENTS OF THE CANADIAN INTERFERENCE-CAUSING EQUIPMENT REGULATIONS.




This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

SAFETY INFORMATION

WEEE

Disposal of Waste Equipment by Users in Private Household in the European Union.



This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product

For Private Households in the European Union. To help conserve natural resources and ensure the product is recycled in a manner that protects human health and the environment, we would like to bring your attention to the following:

- The crossed-out dustbin on the device or outer packaging indicates the product is compliant with European WEEE (Waste Electrical and Electronic Equipment) Directive
- Always dispose of the old devices separately from household waste
- Batteries should be removed beforehand and disposed separately to the right collection system
- You are responsible with regard to the deletion of personal data on old devices before disposal
- Private households can hand in their old devices free of charge
- For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product

PRECAUTIONS

PRECAUTIONS



Symbols used in this manual

	This icon indicates the existence of a potential hazard that could result in personal injury or damage to the product.
	This icon indicates important operating and servicing information.

Notice

- Read this User Manual carefully before using the LCD display and keep it for future reference.
- The product specifications and other information provided in this User Manual are for reference only. All information is subject to change without notice. Updated content can be downloaded from our web site at www.agneovo.com.
- To protect your rights as a consumer, do not remove any stickers from the LCD display. Doing so may affect the determination of the warranty period.

Cautions When Setting Up



Do not place the LCD display near heat sources, such as a heater, exhaust vent, or in direct sunlight.



Do not cover or block the ventilation holes in the housing.



Place the LCD display on a stable area. Do not place the LCD display where it may be subject to vibration or shock.



Place the LCD display in a well-ventilated area.



Do not place the LCD display outdoors.



Do not place the LCD display in a dusty or humid environment.



Do not spill liquid or insert sharp objects into the LCD display through the ventilation holes. Doing so may cause accidental fire, electric shock or damage the LCD display.

PRECAUTIONS

Cautions When Using



Use only the power cord supplied with the LCD display.



The power outlet should be installed near the LCD display and be easily accessible.



If an extension cord is used with the LCD display, ensure that the total current consumption plugged into the power outlet does not exceed the ampere rating.



Do not allow anything to rest on the power cord. Do not place the LCD display where the power cord may be stepped on.



If the LCD display will not be used for an indefinite period of time, unplug the power cord from the power outlet.



To disconnect the power cord, grasp and pull by the plug head. Do not tug on the cord; doing so may cause fire or electric shock.



Do not unplug or touch the power cord with wet hands.



WARNING:

Unplug the power cord from the power outlet and refer to qualified service personnel under the following conditions:



- When the power cord is damaged.
- If the LCD display has been dropped or the housing has been damaged.
- If the LCD display emits smoke or a distinct odor.



Ceiling mount or mount on any other horizontal surface overhead are not advisable.



WARNING:

Installation in contravention of the instructions may result in undesirable consequences, particularly hurting people and damaging property. Users who have already mounted the display on the ceiling or any other horizontal surface overhead are strongly advised to contact AG Neovo for consultations and solutions to help ensure a most pleasurable and fulfilling display experience.

PRECAUTIONS

Cleaning and Maintenance



Do not attempt to service the LCD display yourself, refer to qualified service personnel.

Opening or removing the covers may expose you to dangerous voltage or other risks.

Notice for the LCD Display

In order to maintain the stable luminous performance, it is recommended to use low brightness setting.

Due to the lifespan of the lamp, it is normal that the brightness quality of the LCD display may decrease with time.

When static images are displayed for long periods of time, the image may cause an imprint on the LCD display. This is called image retention or burn-in.

To prevent image retention, do any of the following:

- Set the LCD display to turn off after a few minutes of being idle.
- Use a screen saver that has moving graphics or a blank white image.
- Switch desktop backgrounds regularly.
- Adjust the LCD display to low brightness settings.
- Turn off the LCD display when the system is not in use.

Things to do when the LCD display shows image retention:

- Turn off the LCD display for extended periods of time. It can be several hours or several days.
- Use a screen saver and run it for extended periods of time.
- Use a black and white image and run it for extended periods of time.

There are millions of micro transistors inside the LCD display. It is normal for a few transistors to be damaged and to produce spots. This is acceptable and is not considered a failure.

CHAPTER 1: PRODUCT DESCRIPTION


1.1 Package Contents

When unpacking, check if the following items are included in the package. If any of them is missing or damaged, contact your dealer.

☐ **LCD Display**



LW-2202



LW-2402

☐ **Quick Start Guide**




☐ **Base**




☐ **Stand**




☐ **Power Cord**




☐ **Power Adapter**



☐ **HDMI Cable**



☐ **Warranty Card**



Note:


- Use only the supplied power cord.
- The above pictures are for reference only. Actual items may vary upon shipment.

PRODUCT DESCRIPTION

1.2 Installation


1.2.1 Installing the Stand

1. Place the LCD display with the screen side down on a cushioned surface.
2. Attach the stand to the LCD display.
 - a. Press firmly on the base to secure the latches on the base into the slots on the stand.
 - b. Attach the stand to the base mount.

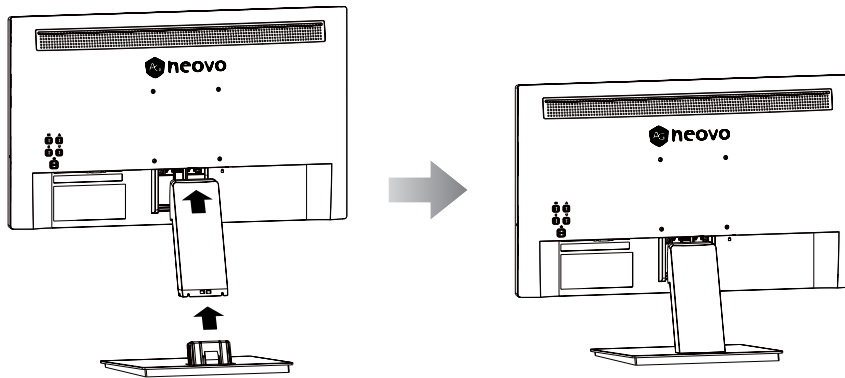

1.2.2 Adjusting the Tilt

The screen can be adjusted by inclining forward and backward; however, the specific adjustment depends on the specific model of the device. Generally, it may be inclined $5\pm 2^\circ$ forward and $15\pm 2^\circ$ backward.

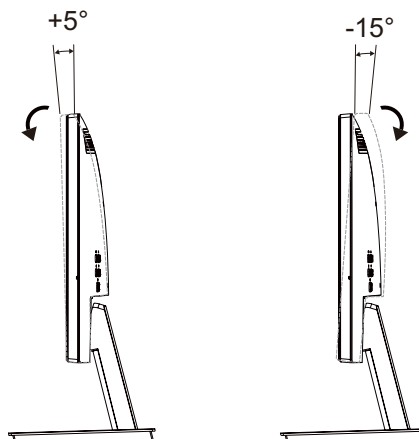

PRODUCT DESCRIPTION

1.2.3 Wall Mounting


To wall mount the LCD display, do the following steps:

1. Remove the base stand.

Detach the base from the base mount. Please refer to page 20.


2. Remove the base mount.

- Place the LCD display with the screen side down on a cushioned surface.
- Push the release button and detach the stand from the base mount.

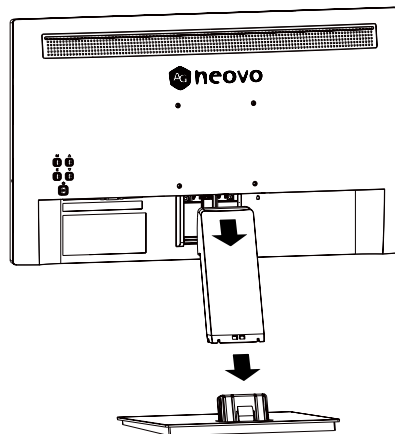

3. Wall mount the LCD display.


Screw the mounting bracket to the VESA holes at the rear of the LCD display.

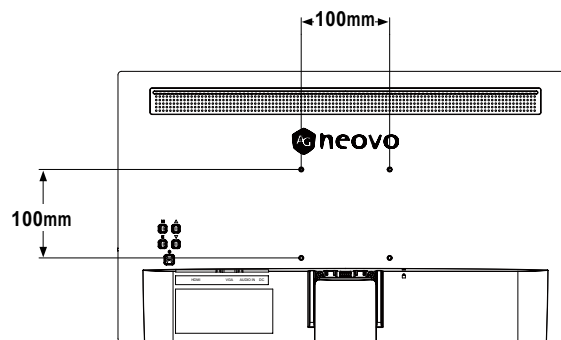

LW-2202 / LW-2402

Note: Take measures to prevent the LCD display from falling down and lessen possible injury and damage to the display in case of earthquakes or other disasters.



- Use only the 100 x 100 mm wall mount kit recommended by AG Neovo. All AG Neovo wall mount kits comply with VESA standard.
- Secure the LCD display on a solid wall strong enough to bear its weight.
- It is suggested to wall mount the LCD display without tilting it facing downward.




PRODUCT DESCRIPTION

1.3 Overview

1.3.1 Front View

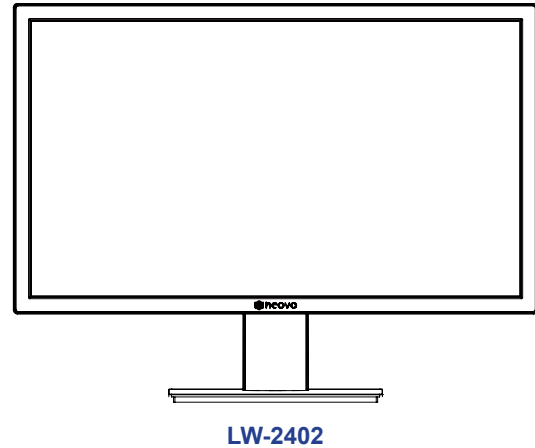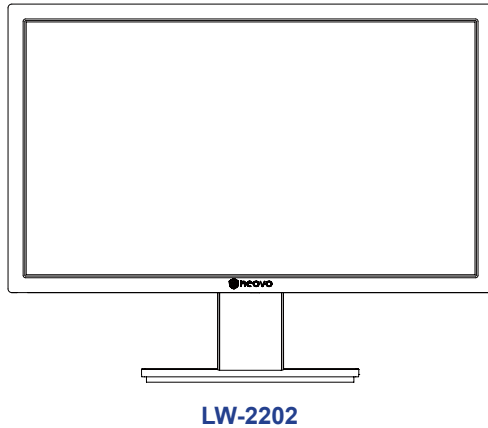

1.3.2 Control Buttons

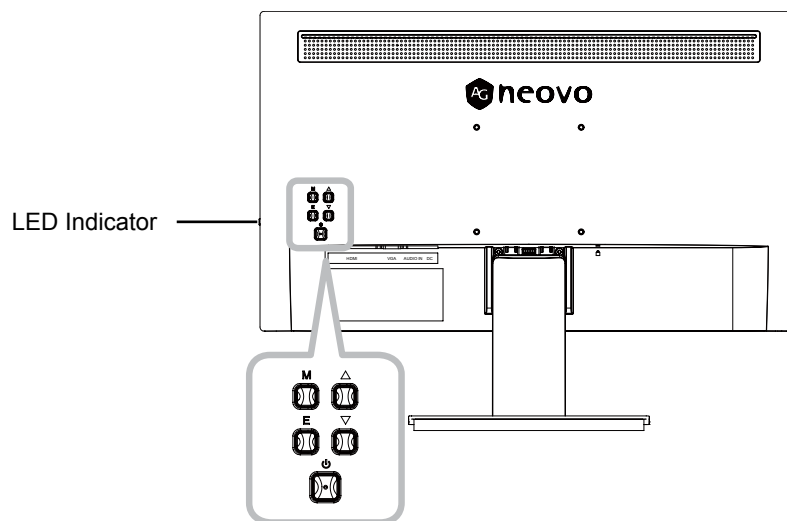


Button	Description
M Button	<ul style="list-style-type: none">• Pops up the menu/Backs to the previous menu (in case of main menu, exits from the whole menu).
E Button	<ul style="list-style-type: none">• When the menu is activated, press this key to select the function.• When the menu closes pressing this button will enter auto adjust, the function is for VGA only.
▲ Button	<ul style="list-style-type: none">• When the menu opens, the value is incremented as the right function selection key.• When the menu is closed, go to situational mode switch.• Hot Key: Press repeatedly to select picture MODE.

PRODUCT DESCRIPTION

Button	Description
▼ Button	<ul style="list-style-type: none"> When the menu opens, the progress bar value is decremented as the left function selects the key.
(P)	Power button: Powers on/off the monitor.
LED indicator light	<p>Long bright (White LED): Normal boot state</p> <p>Flicker (White LED): Power saving standby state.</p> <p>LED off: Off mode</p>

1.3.3 Rear View

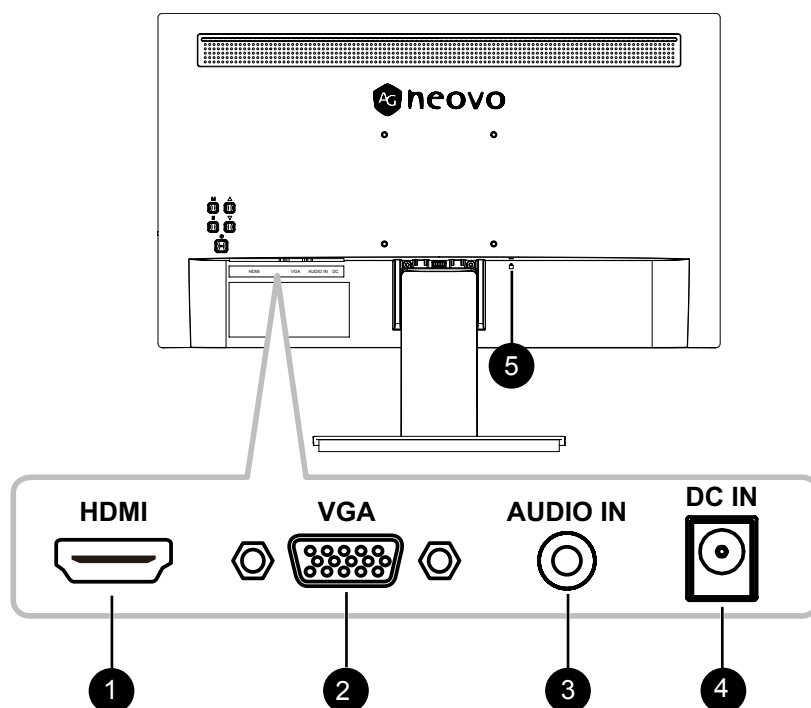

- 1 HDMI Input**
 Connect HDMI signals input.
- 2 VGA Input**
 Connect VGA signals input.
- 3 AUDIO IN**
 Connect audio signals input (3.5 mm Stereo Audio Jack).
- 4 DC IN**
 Connect with the supplied power adapter.

CHAPTER 2: MAKING CONNECTIONS




CAUTION:

Make sure that the LCD display is not connected to the power outlet before making any connections. Connecting cables while the power is ON may cause possible electric shock or personal injury.

2.1 Connecting the DC Power

1. Connect the power cord to the power adapter.
2. Connect the power adapter to the DC power input at the rear of the LCD monitor.
3. Connect the power cord plug to a power outlet or a power supply.

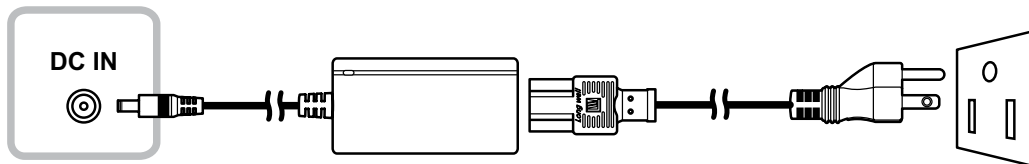


CAUTION:

When unplugging the power cord, hold the power cord by the plug head. Never pull by the cord.

MAKING CONNECTIONS

2.2 Connecting Input Source Signals

Input source signals can be connected with either of the following cables:

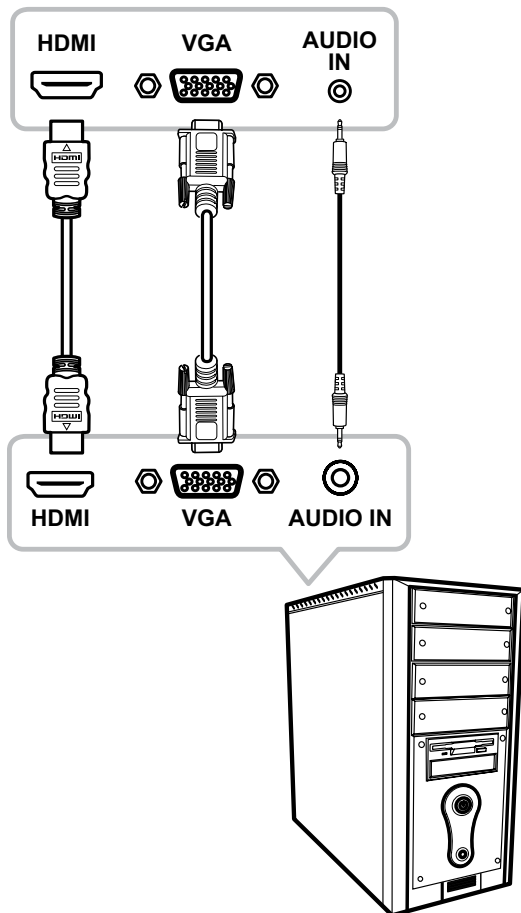

- **HDMI**

Connect the HDMI cable into the HDMI IN port into the back of the monitor.

- **VGA**

Connect the VGA cable into the VGA IN port in the back of the monitor.

- **Audio In**

Connect the AUDIO cable to the AUDIO OUT port in the back of the display.

CHAPTER 3: ON SCREEN DISPLAY MENU

3.1 OSD Menu Tree

Main menu	Submenu	Third menu	Range	Description
Display	Brightness		0-100	Adjust display brightness
	Contrast		0-100	Adjust display contrast
	DCR	ON		Activate dynamic contrast
		Off		Close dynamic contrast
		Return		Return to the Display menu
		Exit		Exit from the menu
	Return			Return to the previous menu
	Exit			Exit from the menu
Language	English			Set display pre-research
	中文			
	Française			
	Deutsch			
	Italiano			
	Español			
	한국어			
	日本語			
	Русский			
	繁中			
	Tiếng Việt			
	Português			
	عربى			
	Return			Return to the previous menu
	Exit			Exit from the menu
Game	OD	On		Activate OD (Over Driver)
		Off		Close OD (Over Driver)
		Return		Return to the Gmae menu
		Exit		Exit from the menu
	Return			Return to the previous menu
	Exit			Exit from the menu

ON SCREEN DISPLAY MENU

Main menu	Submenu	Third menu	Range	Description
Mode	Standard			Set to standard mode
	Cinema			Set to Cinema mode
	FPS			Set to FPS mode
	RTS			Set to RTS mode
	Eye Saver			Set to Eye Saver mode
	Return			Return to the previous menu
	Exit			Exit from the menu
Color Temp.	Cool			Set to Cool Color temperature
	Warm			Set to Warm Color temperature
	User	Red	0-100	Adjust the red output
		Green	0-100	Adjust the green output
		Blue	0-100	Adjust the blue output
		Return		Return to the Color Temp. menu
		Exit		Exit from the whole menu
	Return			Return to the previous menu
	Exit			Exit from the menu
Aspect		Auto		Automatically adjust picture aspect ratio
		16:9		Set the Picture Aspect to 16:9
		4:3		Set the Picture Aspect to 4:3
		Return		Return to the previous menu
		Exit		Exit from the menu
Input		VGA		Set the input source to VGA
		HDMI		Set the input source to HDMI
		Return		Return to the previous menu
		Exit		Exit from the menu

ON SCREEN DISPLAY MENU



Main menu	Submenu	Third menu	Range	Description
Other	Power Off	On		Automatically turn off after saving power for 1 minute
		Off		Close the function of timed switch-off
		Return		Return to Other menu
		Exit		Exit from the menu
	Gamma	Gammar1		Set the Gamma1
		Gammar2		Set the Gamma2
		Return		Return to Other menu
		Exit		Exit from the menu
	Volume		0-100	Adjust the Volume output
	Adjust	Auto Adjust		Automatically adjust the horizontal/vertical location, focusing and clock of pictures (only for VGA)
		Auto Color		Adjust the white balance of pictures (only for VGA)
		Clock	0-100	Adjust the picture clock to reduce vertical line noise (only for VGA)
		Phase	0-100	Adjust the picture phase to reduce horizontal noise (only for VGA)
		Return		Return to Other menu
		Exit		Exit from the menu
	Return			Return to Other menu
	Exit			Exit from the menu
Reset	Yes			Reset to factory setup
	No			Exit from this function
	Return			Return to the previous menu
	Exit			Exit from the menu
Exit				Exit from the menu

Note: Availability of some menu items depend on the input source signal. If the menu is not available, it is disabled and greyed out.

CHAPTER 4: APPENDIX

4.1 Warning Messages

When any of these warning messages appear, check the following items.

Warning Message	Cause	Solution
 A gray rectangular box with the text "No Signal" in orange.	The LCD display cannot detect the input source signal.	<ul style="list-style-type: none">✓ Check if the input source is turned ON.✓ Check if the signal cable is properly connected.✓ Check if any pin inside the cable connector is twisted or broken.
 A gray rectangular box with orange borders. The text inside reads: "CHANGING THE FOLLOWING SETTINGS IN OSD MENU MAY INCREASE THE POWER CONSUMPTION OF YOUR MONITOR." followed by "DO YOU WANT TO CONTINUE TO CHANGE?" and two buttons labeled "ACCEPT" and "CANCEL".	This warning message box will only show when the menu feature setting is changed for the first time.	<ul style="list-style-type: none">• Press the ACCEPT button to continue the setting changes, or press the CANCEL button to disable the setting changes.• Note: The operation may vary from different product models.

APPENDIX

4.2 Troubleshooting

Problems	Possible Cause and Solution
The power indicator light is not on	<ul style="list-style-type: none"> • Check if the power is on. • Check if the power cord is connected.
Impossible plug-and-play	<ul style="list-style-type: none"> • Check if the function of plug-and-play of the device is compatible with PC. • Check if the display card is compatible with the plug-and-play function. • Check if the signal line 15 pin d joint bent
Dimming picture	<ul style="list-style-type: none"> • Adjust brightness and contrast.
Flickering picture or picture with ripples	<ul style="list-style-type: none"> • There may be electrical appliances or equipment with electronic disturbance.
The power indicator light is on (flickering), but the monitor has no pictures.	<ul style="list-style-type: none"> • Check if the PC power is on. • Check if the PC display card is inserted properly. • Check if the signal cable of the monitor is correctly connected with the PC. • Check the signal cable plug of the monitor and make sure every pin has no bending. • Observe the indicator light by pressing the Caps Lock key on the PC keyboard and check if the PC is working.
Color shortage (red, green and blue)	<ul style="list-style-type: none"> • Check the signal cable of the monitor and make sure every pin has no bending.
Picture with color difference (white looks not white)	<ul style="list-style-type: none"> • Adjust RGB color or reselect color temperature.
Screen font blur under VGA signal	<ul style="list-style-type: none"> • Select the “E” to automatically adjust the image.
Screen color error under VGA signal	<ul style="list-style-type: none"> • Select “Auto color” in OSD to correct under the white output screen.


APPENDIX

4.3 Transporting the LCD Display

To transport the LCD display for repair or shipment, place the display in its original packaging box.

1. Remove the base stand.

- a. Place the LCD display with the screen side down on a cushioned surface.
- b. Detach the base from the base mount.
- c. Push the release button and detach the stand from the base mount.

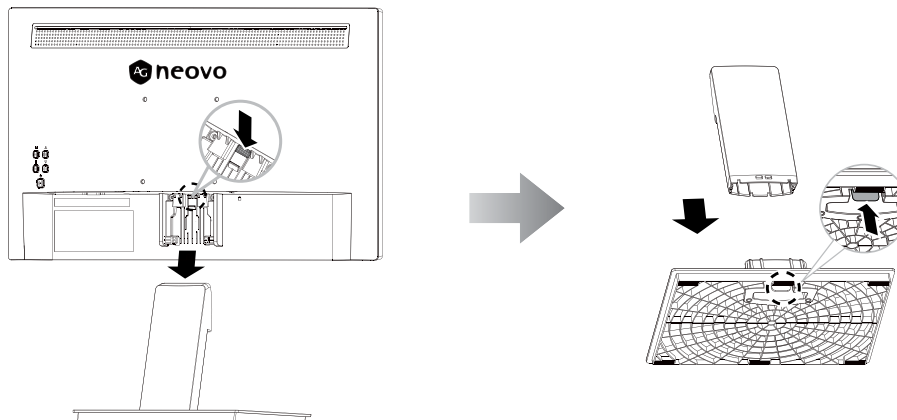

2. Put the LCD display inside its original plastic.

3. Place the two foam cushions on the right and left side of the LCD display for protection.


4. Put the LCD display face down in the box.

5. Put the base and stand face down on the top of the foam cushion.

6. Put all other contents on their designated area (if necessary).

7. Close and tape the box.

APPENDIX

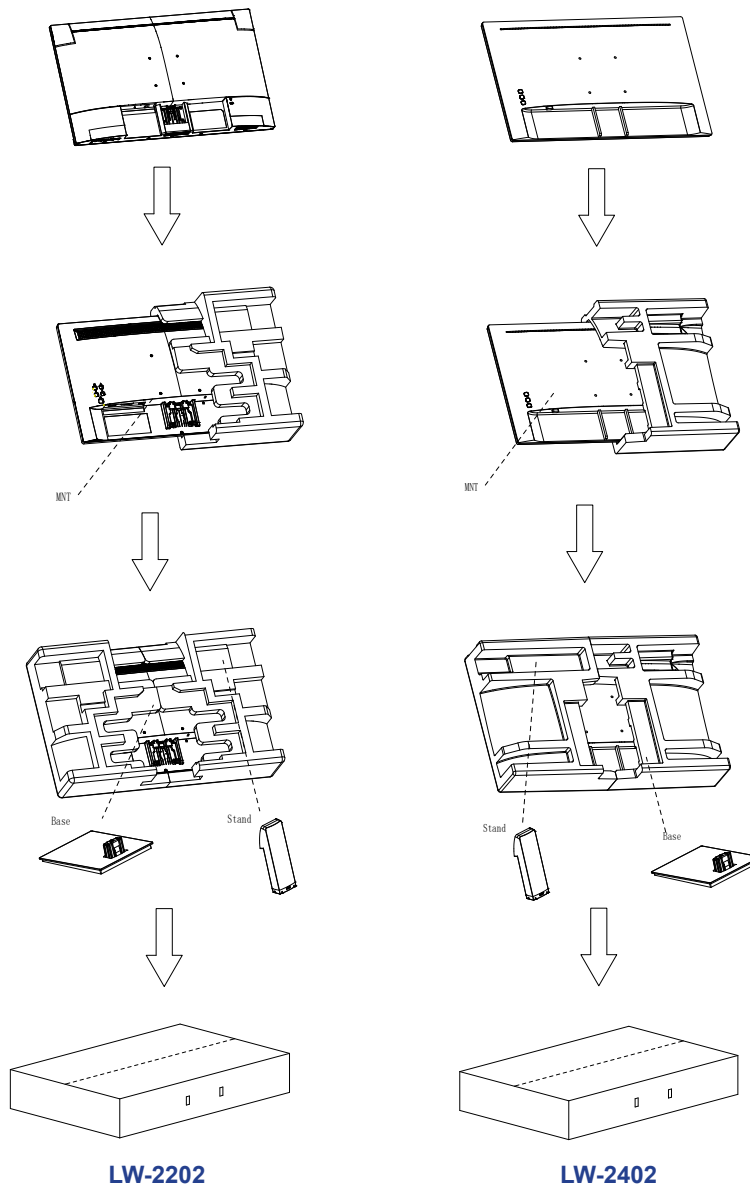

Note:

- It is recommended to use the original packaging box.
- When repacking, carefully place the LCD display in its box and protect the glass panel from touching any object.

CHAPTER 5: SPECIFICATIONS

5.1 Display Specifications


LW-2202		LW-2402	
Panel	Panel Type	LED-Backlit TFT LCD (VA Technology)	LED-Backlit TFT LCD (VA Technology)
	Panel Size	21.5"	23.8"
	Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080
	Pixel Pitch	0.248 mm	0.275 mm
	Brightness	250 cd/m ²	250 cd/m ²
	Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)
	Viewing Angle (H/V)	178°/178°	178°/178°
	Display Colour	16.7M	16.7M
	Response Time	5 ms	5 ms
	Surface Treatment	Anti-Glare Treatment (Haze 25%), 3H Hard Coating	Anti-Glare Treatment (Haze 25%), 3H Hard Coating
Frequency (H/V)	H Freq.	30 kHz-81 kHz	30 kHz-81 kHz
	V Freq.	48 Hz-75 Hz	48 Hz-75 Hz
Input	HDMI	1.4 x 1	1.4 x 1
	VGA	15-Pin D-Sub x 1	15-Pin D-Sub x 1
Audio	Audio In	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)
	Internal Speaker	1W x 2	1W x 2
Power	Power Supply	External	External
	Power Requirements	DC 12V, 2.5A	DC 12V, 2.5A
	On Mode	16W (On)	16W (On)
	Standby Mode	< 0.5W	< 0.5W
	Off Mode	< 0.3W	< 0.3W
Operating Conditions	Temperature	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)
	Humidity	20%-85% (non-condensing)	20%-85% (non-condensing)
Storage Conditions	Temperature	-20°C-60°C (-4°F-140°F)	-20°C-60°C (-4°F-140°F)
	Humidity	5%-95% (non-condensing)	5%-95% (non-condensing)
Mounting	VESA FPMPI	Yes (100 x 100 mm)	Yes (100 x 100 mm)
Stand	Tilt	-5° to 15°	-5° to 15°
Security	Kensington Security Slot	Yes	Yes
Dimensions	w/ base (W x H x D)	514.6 x 401.1 x 180.8 mm (20.3" x 15.8" x 7.1")	565.3 x 430.0 x 180.8 mm (22.3" x 16.9" x 7.1")
	Packaging (W x H x D)	577.0 x 372.0 x 128.0 mm (22.7" x 14.7" x 5.0")	627.0 x 397.0 x 128.0 mm (24.7" x 15.6" x 5.0")
Weight	w/ base	2.5 kg (5.5 lb)	2.8 kg (6.2 lb)
	Packaging	3.7 kg (8.2 lb)	4.2 kg (9.3 lb)

Note: All specifications are subject to change without prior notice.


SPECIFICATIONS

5.2 Display Dimensions

LW-2202

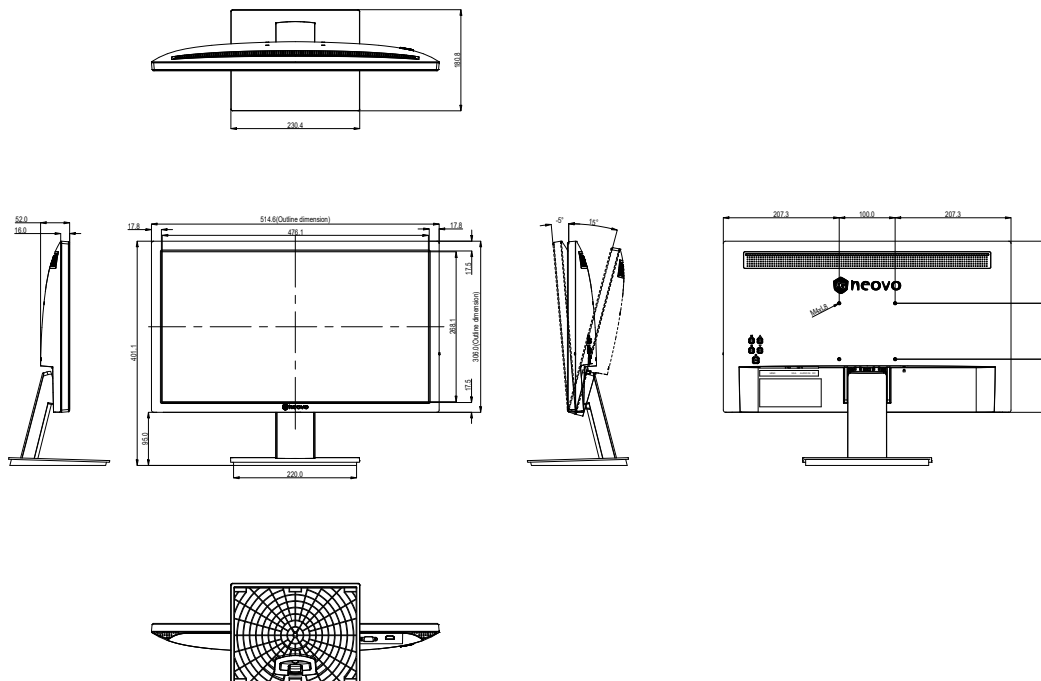

LW-2402

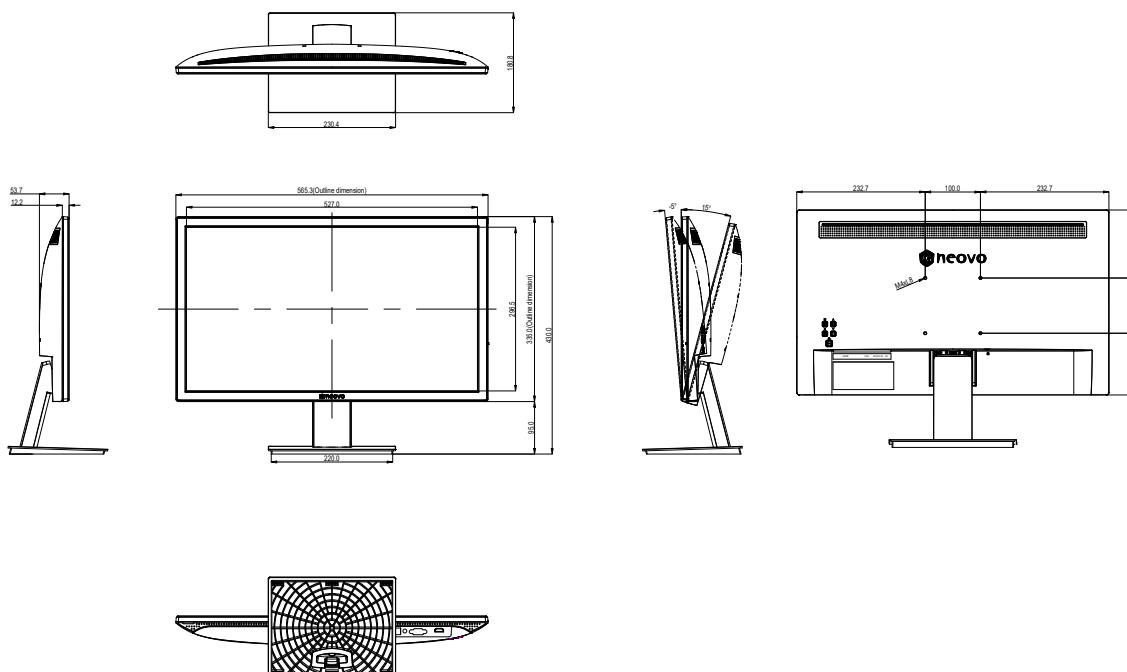

AG Neovo

Company Address: 5F-1, No. 3-1, Park Street, Nangang District, Taipei, 11503, Taiwan.

Copyright © 2022 AG Neovo. All rights reserved.

LW-2202/LW-2402 Eprel registration number: 1144484/ 1144487

LW2220/LW2420_UM_V010